


Vinny is an outdoor LED bollard with a round head offered in 3 different heights, 1-foot, 2-foot or 3-foot. It is offered in static white, with 5 standard finishes.



## TECHNICAL DATA

|                           |                                         |
|---------------------------|-----------------------------------------|
| <b>Wattage</b>            | 10W                                     |
| <b>Power Supply</b>       | Remote 350mA, not included - See page 2 |
| <b>Dimming</b>            | Dimming based on remote power selected. |
| <b>Construction</b>       | Body: Aluminum<br>Lens: Clear           |
| <b>CCT</b>                | 2700K, 3000K, 4000K                     |
| <b>BUG Rating</b>         | B0-U2-G0 (3000K)                        |
| <b>CRI</b>                | >80                                     |
| <b>Delivered Lumens</b>   | 625 lm (3000K)                          |
| <b>Efficacy</b>           | 62.5 lm/W                               |
| <b>Optics</b>             | 180°                                    |
| <b>Finishes</b>           | 5 Standard, Custom RAL on request       |
| <b>Fixture Dimensions</b> | Ø4.8" or 12.0", 24.0" or 36.0" h        |
| <b>IP Rating</b>          | IP65                                    |

Fixture Dimensions - Spike version on page 2

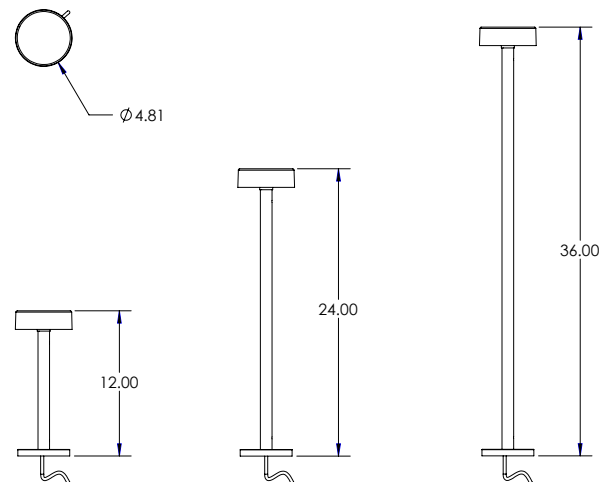

## ORDERING INFORMATION

*Example: VIN-L-1-40-02-R-0. Accessories / Power Supplies ordered separately.*

| VIN-L   | -         |            | -                |                                         | - |  | -        | 0 |
|---------|-----------|------------|------------------|-----------------------------------------|---|--|----------|---|
| Model # | Height    | CCT        | Finish           | Dimming                                 |   |  | Options  |   |
| VIN-L   | 1 - 1 ft. | 27 - 2700K | 11 - White Suede | R - <u>Remote</u> Driver                |   |  | 0 - None |   |
|         | 2 - 2 ft. | 30 - 3000K | 02 - Black Suede | L - Lutron Dimming <u>Remote</u> Driver |   |  |          |   |
|         | 3 - 3 ft. | 40 - 4000K | GR - Graphite    |                                         |   |  |          |   |
|         |           |            | 18 - Tex. Bronze |                                         |   |  |          |   |
|         |           |            | TS - Silver      |                                         |   |  |          |   |
|         |           |            | C - Custom       |                                         |   |  |          |   |


Job Name/Date:

Fixture Type Designation:



## ACCESSORIES - Installation




**AM-00018**  
Mounting Base  
Assembly



## Spike Version




**AM-00019**  
Spike Base  
Assembly




FIXTURE


## FIXTURE DIMENSIONS - Spike Version




Ø 4.81



12.22

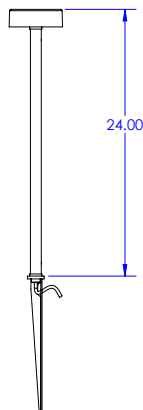

24.00

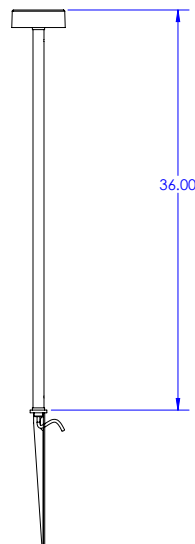

36.00

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

## 350mA Remote Drivers

| Part Number                 | Description                                        | Input/Output                       | # of Fixtures |
|-----------------------------|----------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00139</a>   | 0-10V Dimming to 10%                               | 120-277VAC to 350mA, 12W, Class 2  | 1-1           |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only)                              | 120-277VAC to 350mA, 14W, Class 2  | 1-1           |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 20W, Class 2  | 1-1           |
| <a href="#">PPLT00263</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2  | 1-1           |
| <a href="#">PPLT00168-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 50W, Class 2  | 1-2           |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 100W, Class 2 | 1-4           |

## Suggested Lutron Compatible - Static White - 350mA Remote Driver


| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 1-1           |

For other power supply options consult factory.

**PHOTOMETRIC DATA**

Note: All photometry is 3000K

Maximum Candela = 278.3

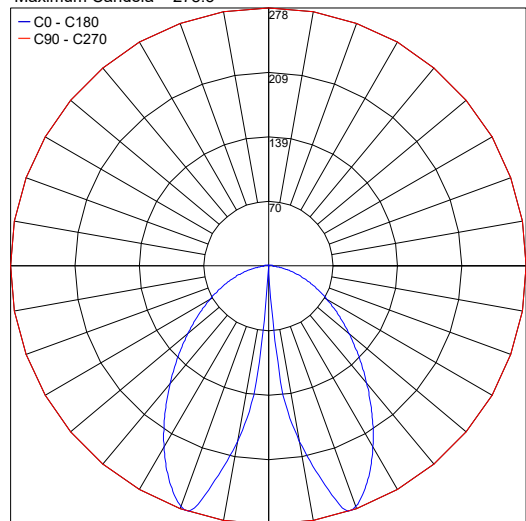

PHOTOMETRIC FILENAME : VINNY 1FT 30K WHITE SUEDE - LLIA002261-002.IES

Job Name/Date:

Fixture Type Designation: