

Kupolo Matte

Kupolo Matte is a fully configurable, handcrafted, circular, decorative dome pendant, made of high-grade Dual Satin acrylic, and available in multiple etch-designs and a choice of 2 dome colors. It is available in 4 diameters: 21.7", 29.6", 37.5" and 45.4", and static white or tunable white options. PROVIDED WITH INTEGRAL DALI2 DRIVER. REQUIRES REMOTE 48VDC non-dim DRIVER AND DALI CONTROLS PROVIDED BY OTHERS.



Fixture Dimensions - See Page 2

TECHNICAL DATA

Wattage	STATIC WHITE	TUNABLE WHITE
	88W - 21.7" (550 mm)	138W - 21.7" (550 mm)
	120W - 29.6" (750 mm)	181W - 29.6" (750 mm)
	152W - 37.5" (950 mm)	233W - 37.5" (950 mm)
	184W - 45.4" (1150 mm)	284W - 45.4" (1150 mm)
Power Supply	Remote 48VDC, not included. See page 2. Integral DALI2 drivers - Dali controls provided by others	
Construction	Dome: 0.31" High-grade Acrylic Ring: CNC Milled High-grade Aluminum Lens: 0.24" High-grade Satin Acrylic	
CCT	2700K, 3000K, 4000K, 5000K, 6500K Tunable White 2200-6500K	
CRI	80 (90 optional for 2700K, 3000K, 4000K)	
Delivered Lumens	6,927 lm (21.7" - 30K)	11,411 lm (21.7" - TW)
	9,444 lm (29.6" - 30K)	15,557 lm (29.6" - TW)
	11,965 lm (37.5" - 30K)	19,711 lm (37.5" - TW)
	14,479 lm (45.4" - 30K)	23,851 lm (45.4" - TW)
Efficacy	79 lm/W (3000K)	
Optics		
Dome, Ring Colors	2 Dome, 4 Ring, 6 Etch Designs - See Below	
Fixture Dimensions	9.9" x Ø21.7", 13.5" x Ø29.6" 17.0" x Ø37.5", 21.7" x Ø45.4"	
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)	
Color Consistency	3-Step MacAdam	

ORDERING INFORMATION

Example: ARKUP-4-1-T-V-G-S-C.US. Power Supplies ordered separately.


ARKUP	-		-	1	-		-	V	-		-		-		-		-		US
-------	---	--	---	---	---	--	---	---	---	--	---	--	---	--	---	--	---	--	----

Model #	Diameter	CRI	CCT	Style	Dome Gloss	Ring Trim	Etch Design	
ARKUP	4 - 45.4"	1 - 80	2 - 2700K	V - Concave	W - White G - Gray	A - Alum B - Black S - Silver G - Gold	C - Circle L - Lines S - Shade R - Rose M - Mikado W - Wave	US
	3 - 37.5"		3 - 3000K					
	2 - 29.6"		4 - 4000K					
	1 - 21.7"		5 - 5000K 6 - 6500K T - Tunable White					

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

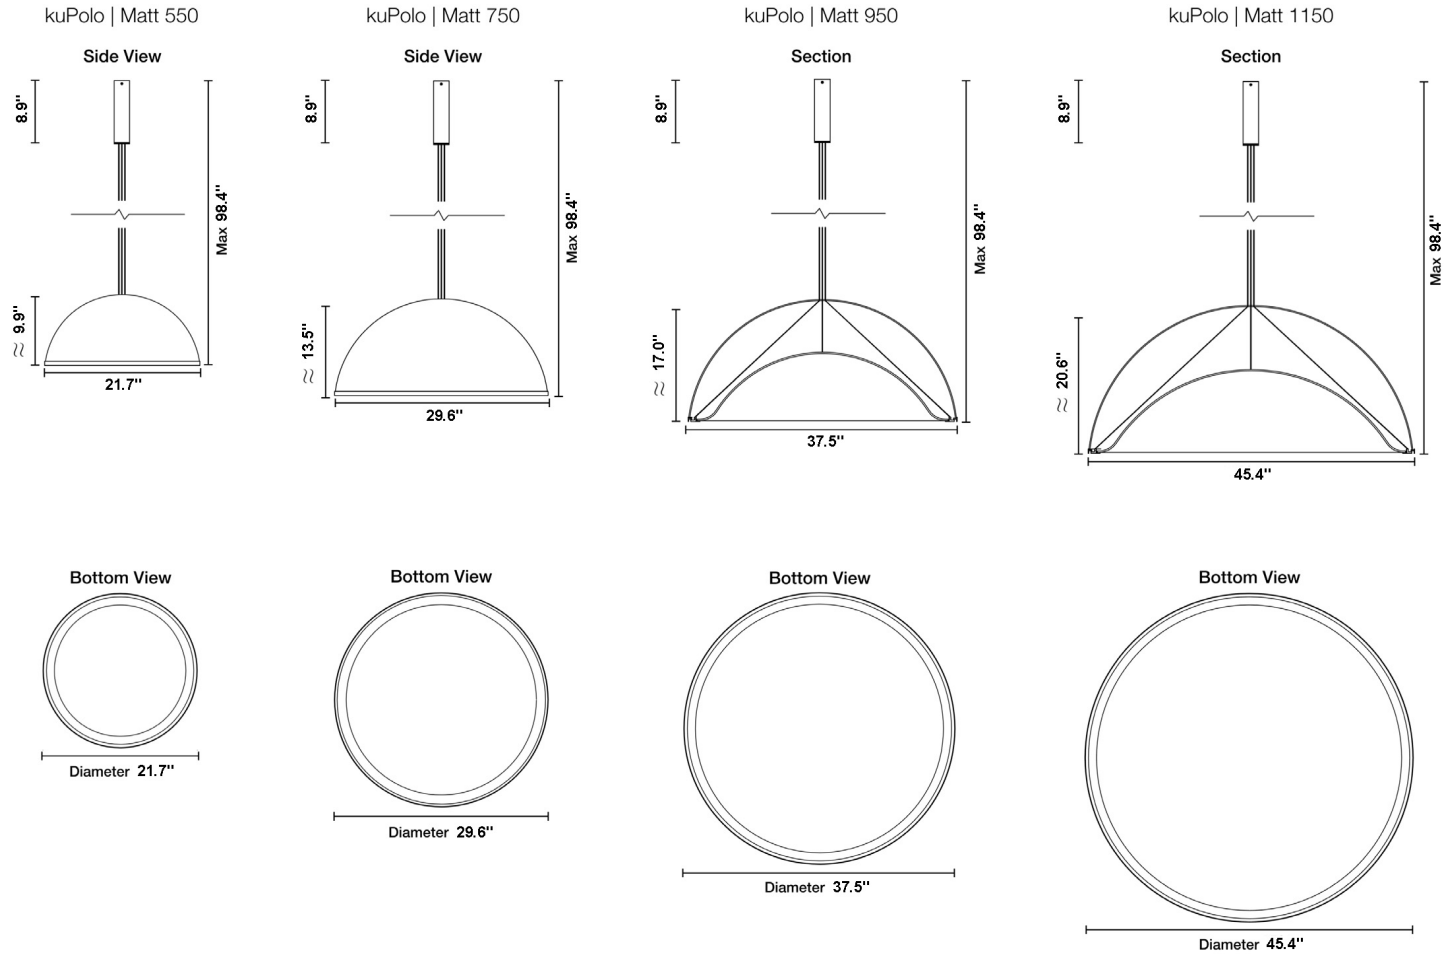

SUGGESTED POWER SUPPLIES

48VDC

Part Number	Description	Input/Output	# of Fixtures			
			Ø21.7"	Ø29.6"	Ø37.5"	Ø45.4"
PPLT00492	Non-Dim	120-277VAC to 48VDC, 187W, Class 2	1-1	1-1	—	—
PPLT00672	Non-Dim	120-277VAC to 48VDC, 240W, Class 2	1-2	1-2	1-1	1-1
PPLT00566	Non-Dim	120-277VAC to 48VDC, 600W, Class 2	1-5	1-4	1-3	1-2

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

DOME COLORS



WhiteMatt

GreyMatt

RING COLORS



Alu Matt



Black Matt




Silver



Gold


ETCH DESIGNS



Circle




Lines



Shade



Rose




Mikado




Wave

ACCESSORIES

Installation

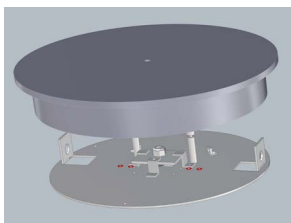

xxx
Ceiling Rose - Gear Tube

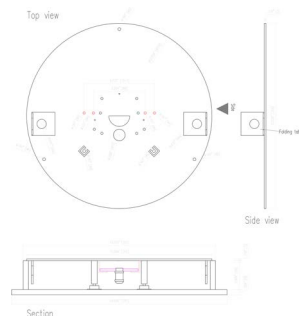

Optional

xxx
Casambi App & Power Supply
(required for Casambi version)









xxx
Casambi Wall Switch

xxx
DALI bus (AC/DC Power Supply +
Dali Converter for 24VDC)

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA - Note all Photometry is 3000K

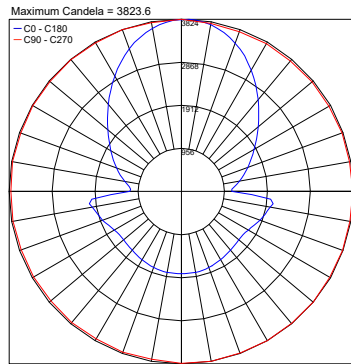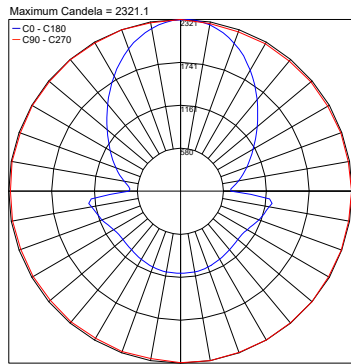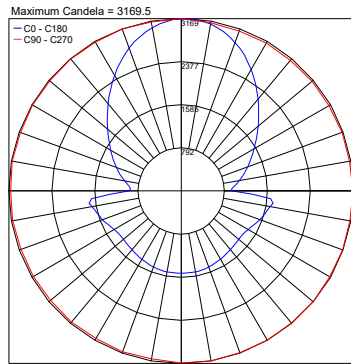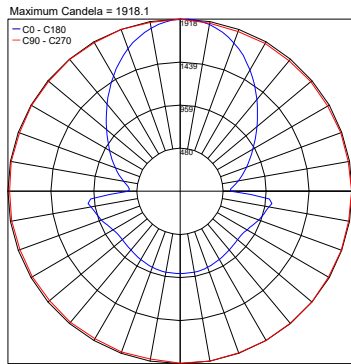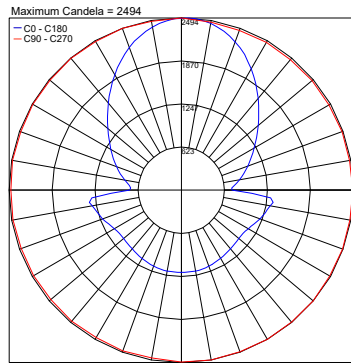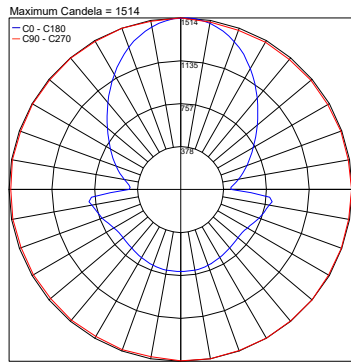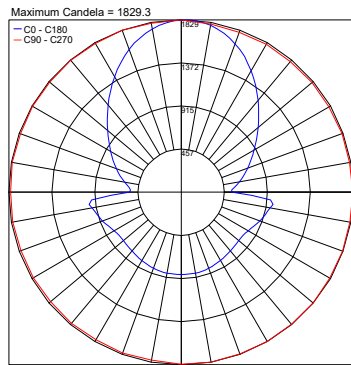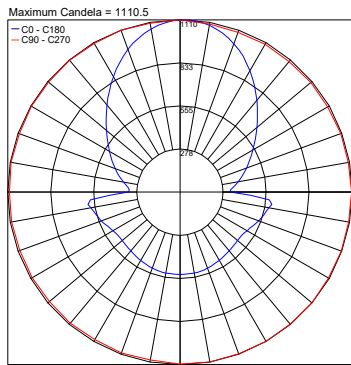

Job Name/Date:

Fixture Type Designation: