

METOPE 2.1


Metope is a square, single or double beam, wall-mounted, facade light perfect for hospitality or private home outdoor environments. It is available in 3 different sizes, with recessed optics for high visual comfort, 4 optics options, and 4 standard finishes including primer, so that the fixture's surface can be the same paint as the wall it is on allowing it to blend into its surroundings.

TECHNICAL DATA

Wattage / Input	7W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Serigraphed Gray, Tempered, Transparent Extra-Clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>90
BUG Rating	B1-U0-G0 (3000K - 26°, 36°, 52°, Diffuse) B1-U1-G0 (3000K - 21°)
Delivered Lumens	501 lm (52°, 3000K)
Efficacy	71.6 lm/W (52°, 3000K)
Optics	21°, 26°, 36°, 52°, Diffuse
Finishes	4 Standard, see below (4 Stage Marine Grade Finish)
Fixture Dimensions	2.01" w x 2.99" l x 5.91"h
Fixture Weight	1.32 lbs
LED Source	1 COB LEDs
Lumen Maintenance	L80, B10 >60,000 hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP65
IK Rating	IK05



Fixture Dimensions



ORDERING INFORMATION

Example: TM2100100150LT. Power Supplies / Accessories ordered separately.

TM2100	1				
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
TM2100	1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse optics</i>	N - 2200K F - 2700K 5 - 3000K 9 - 4000K	0S - 21° 0M - 26° 0L - 36° 0K - 58° 0D - Diffuse	E - White H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-11
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-11

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-10

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-10

For other power supply options consult factory.

ACCESSORIES


Anti-glare



Honeycomb Louvre*

*Optical accessory added in ordering matrix

Can be fitted on all optics except for diffuse optics



WDA20_

Spacer

For Spacer include one of the below finishes:

E - White

H - Anthracite

T - Cor-ten

7 - Primer

CR - Custom RAL (consult factory)


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


Maximum Candela = 2287.6

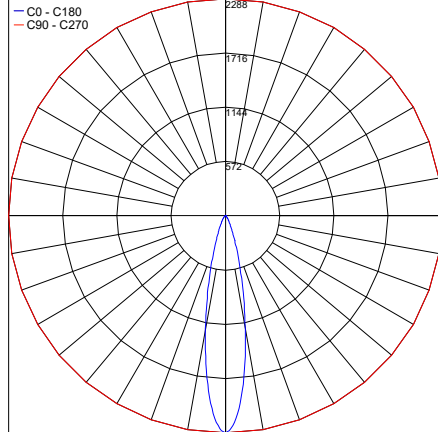


Maximum Candela = 1720.8

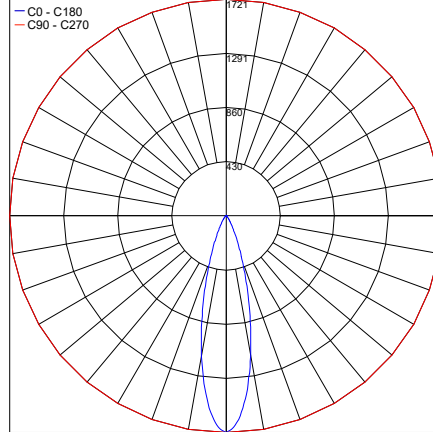


Maximum Candela = 913.25

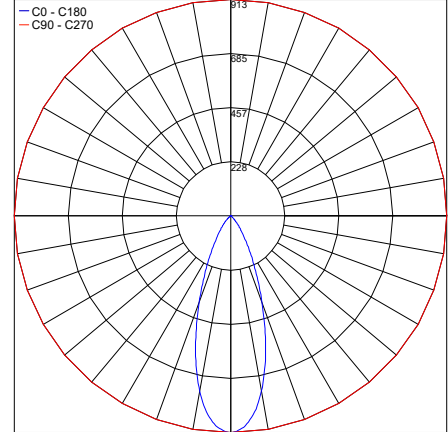

Maximum Candela = 619.6

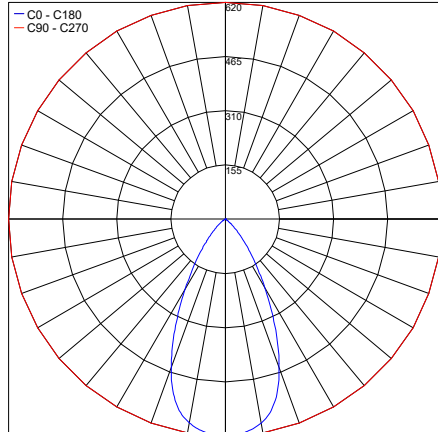

Maximum Candela = 534.5

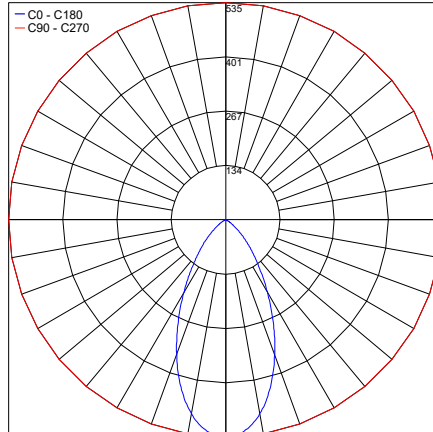

Job Name/Date:

Fixture Type Designation: