

METOPE 2.2


Metope is a square, single or double beam, wall-mounted, facade light perfect for hospitality or private home outdoor environments. It is available in 3 different sizes, with recessed optics for high visual comfort, 4 optics options, and 4 standard finishes including primer, so that the fixture's surface can be the same paint as the wall it is on allowing it to blend into its surroundings.

TECHNICAL DATA

Wattage / Input	13W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Serigraphed Gray, Tempered, Transparent Extra-Clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>90
BUG Rating	B1-U3-G0 (3000K - 26°, 36°, 21° 21°+52°, Diffuse) B1-U4-G0 (3000K - 52°)
Delivered Lumens	1002 lm (52°, 3000K)
Efficacy	77.1 lm/W (17°, 3000K)
Optics	21°+21°, 21°+52°, 26°+26°, 36°+36°, 52°+52°, Diffuse
Finishes	4 Standard, see below (4 Stage Marine Grade Finish)
Fixture Dimensions	2.01" w x 2.99" l x 5.91"h
Fixture Weight	1.50 lbs
LED Source	2 COB LEDs
Lumen Maintenance	L80, B10 >60,000 hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP65
IK Rating	IK05



Fixture Dimensions



ORDERING INFORMATION

Example: TM220010015LLT. Power Supplies / Accessories ordered separately.

TM2200	1				
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
TM2200	1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse optics</i>	N - 2200K F - 2700K 5 - 3000K 9 - 4000K	SS - 21°+21° SK - 21°+52° MM - 26°+26° LL - 36°+36° KK - 52°+52° DD - Diffuse	E - White H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-6
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-6

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-5

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5


For other power supply options consult factory.

ACCESSORIES - Anti-glare



Honeycomb Louvre*

*Optical accessory added in ordering matrix
Can be fitted on all optics except for diffuse



WDA20_

Spacer

For Spacer include one of the below finishes:

E - White

H - Anthracite

T - Cor-ten

7 - Primer

CR - Custom RAL (consult factory)


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 2287.6

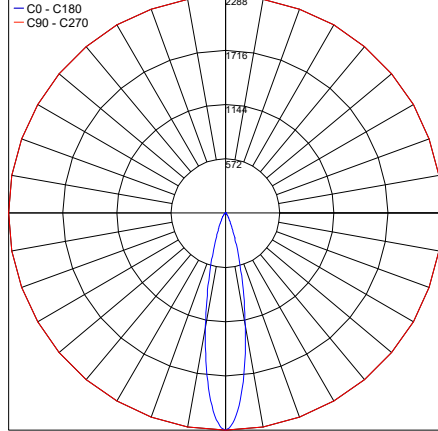


PHOTOMETRIC FILENAME : METOPE_2.1_S_21_3000K_7W.IES

Maximum Candela = 1720.8

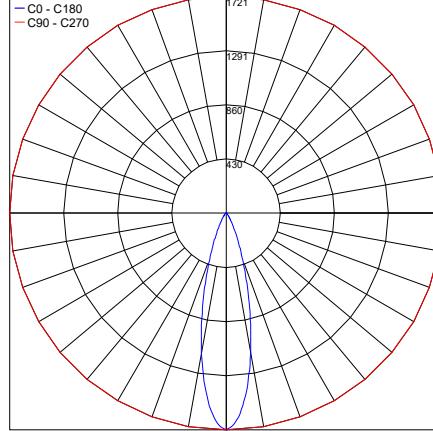


PHOTOMETRIC FILENAME : METOPE_2.1_M_26_3000K_7W.IES

Maximum Candela = 913.25

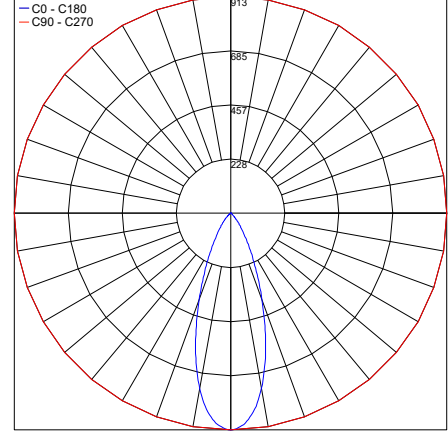


PHOTOMETRIC FILENAME : METOPE_2.1_L_36_3000K_7W.IES

Maximum Candela = 619.6

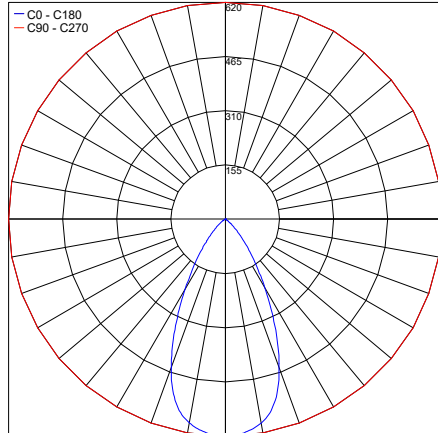

PHOTOMETRIC FILENAME : METOPE_2.1_K_52_3000K_7W.IES

Maximum Candela = 534.5

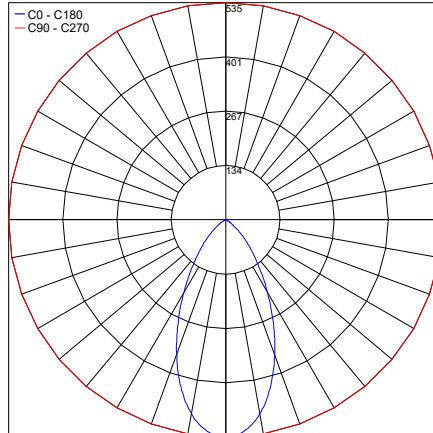

PHOTOMETRIC FILENAME : METOPE_2.1_D_3000K_7W.IES

Job Name/Date:

Fixture Type Designation: