


Metope is a square, single or double beam, wall-mounted, facade light perfect for hospitality or private home outdoor environments. It is available in 3 different sizes, with recessed optics for high visual comfort, 4 optics options, and 4 standard finishes including primer, so that the fixture's surface can be the same paint as the wall it is on allowing it to blend into its surroundings.

TECHNICAL DATA

Wattage / Input	10W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Serigraphed Gray, Tempered, Transparent Extra-Clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>90
BUG Rating	B1-U1-G0 (3000K - Asym, 31°, 26°, 16°) B1-U0-G0 (3000K - Diffuse, 54°, 37°)
Delivered Lumens	761 lm (16°, 3000K)
Efficacy	76.1 lm/W (16°, 3000K)
Optics	16°, 26°, 37°, 54°, Asymmetrical, Diffuse
Finishes	4 Standard, see below
Fixture Dimensions	3.23" w x 4.76" l x 9.45" h
Fixture Weight	1.32 lbs
LED Source	1 COB LEDs
Lumen Maintenance	L80, B10 >60,000 hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP65
IK Rating	IK05



Fixture Dimensions

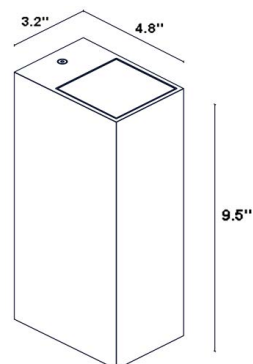

Note: 3.1 and 3.2 models should state "to be mounted to the wall over a single gang switch box"

ORDERING INFORMATION

Example: TM3100100150LT. Power Supplies / Accessories ordered separately.

TM3100	1				
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
TM3100	1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse optics</i>	N - 2200K F - 2700K 5 - 3000K 9 - 4000K	0S - 16° 0M - 26° 0L - 37° 0K - 54° 0A - Asym. 0D - Diffuse	E - White H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-4
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-7
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-3
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-7

For other power supply options consult factory.

ACCESSORIES


Anti-glare



Honeycomb Louvre*

*Optical accessory added in ordering matrix

Can be fitted on all optics except for diffuse optics



WDA21_

Spacer

For Spacer include one of the below finishes:

E - White

H - Anthracite

T - Cor-ten

7 - Primer

CR - Custom RAL (consult factory)


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 5972.6

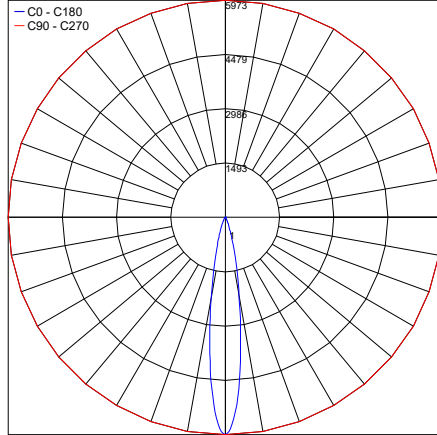


PHOTOMETRIC FILENAME : METOPE_3.1_S_16_3000K_10W.IES

Maximum Candela = 3130

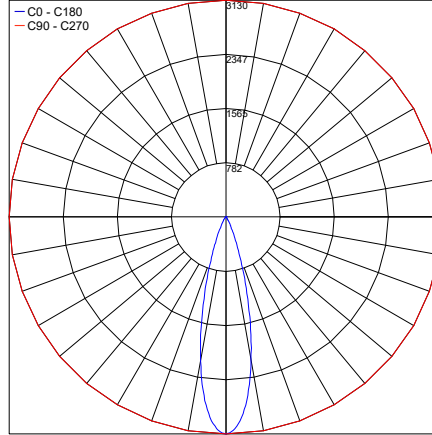


PHOTOMETRIC FILENAME : METOPE_3.1_M_26_3000K_10W.IES

Maximum Candela = 1607.1

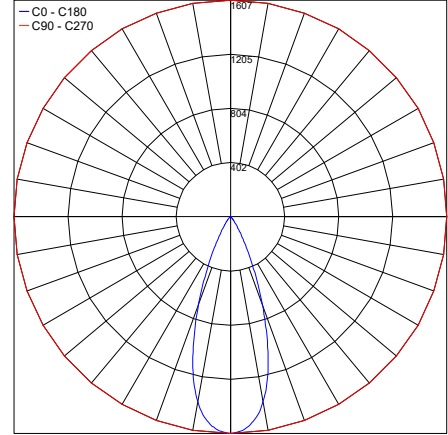


PHOTOMETRIC FILENAME : METOPE_3.1_L_37_3000K_10W.IES

Maximum Candela = 1040.1

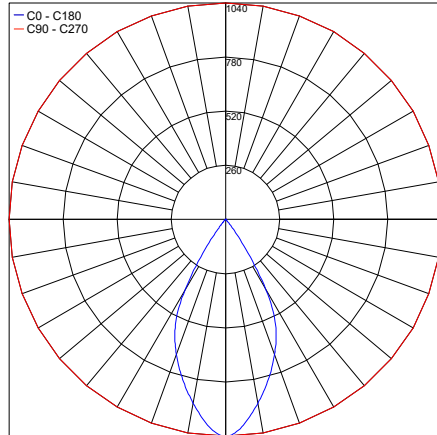


PHOTOMETRIC FILENAME : METOPE_3.1_K_54_3000K_10W.IES

Maximum Candela = 1021.2

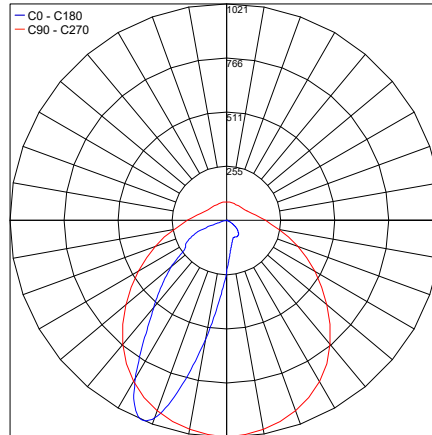

PHOTOMETRIC FILENAME : METOPE_3.1_A_3000K_10W.IES

Maximum Candela = 830.2

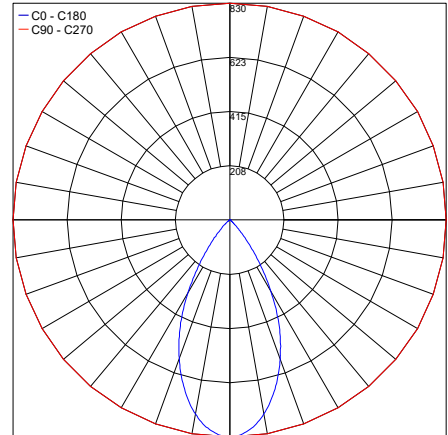

PHOTOMETRIC FILENAME : METOPE_3.1_D_3000K_10W.IES

Job Name/Date:

Fixture Type Designation: