


Metope is a square, single or double beam, wall-mounted, facade light perfect for hospitality or private home outdoor environments. It is available in 3 different sizes, with recessed optics for high visual comfort, 4 optics options, and 4 standard finishes including primer, so that the fixture's surface can be the same paint as the wall it is on allowing it to blend into its surroundings.



TECHNICAL DATA

Wattage / Input	19W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Serigraphed Gray, Tempered, Transparent Extra-Clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>90
BUG Rating	B1-U4-G0 (3000K)
Delivered Lumens	1522 lm (16°, 3000K)
Efficacy	80.1 lm/W (16°, 3000K)
Optics	16°+16°, 16°+54°, 26°+26°, 37°+37°, 54°+54°, Asymmetrical, Asymmetrical + 16°, Diffuse
Finishes	4 Standard, see below
Fixture Dimensions	3.23" w x 4.76" l x 9.45" h
Fixture Weight	4.67 lbs
LED Source	2 COB LEDs
Lumen Maintenance	L80, B10 >60,000 hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP65
IK Rating	IK05

Fixture Dimensions

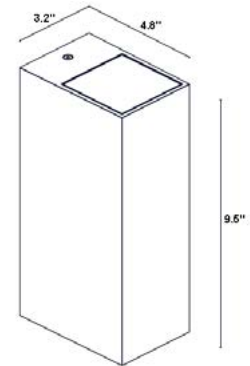

Note: 3.1 and 3.2 models to be mounted to the wall over a single gang switch box.

ORDERING INFORMATION

Example: TM320010015LLT. *Power Supplies / Accessories ordered separately.*

TM3200	1				
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
TM3200	1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse optics</i>	N - 2200K F - 2700K 5 - 3000K 9 - 4000K	SS - 16°+16° SK - 16°+54° MM - 26°+26° LL - 37°+37° KK - 54°+54° AA - Asym. AS - Asym + 16° DD - Diffuse	E - White H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-2
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-4
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC , 96W, Class 2	1-4

For other power supply options consult factory.


ACCESSORIES

Anti-glare



Honeycomb Louvre*

*Optical accessory added in ordering matrix
Can be fitted on all optics except for diffuse optics



WDA21_ Spacer

For Spacer include one of the below finishes:


- E** - White
- H** - Anthracite
- T** - Cor-ten
- 7** - Primer
- CR** - Custom RAL (consult factory)

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

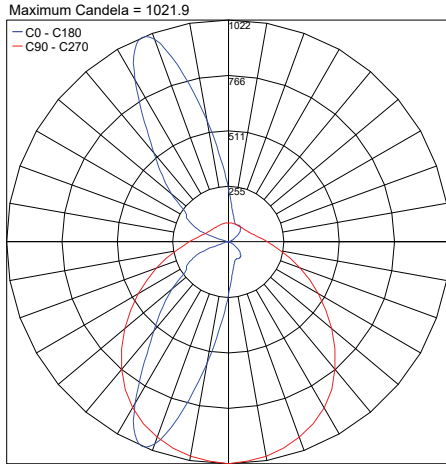


PHOTOMETRIC FILENAME : METOPE_3.2_AA_3000K_19W.IES

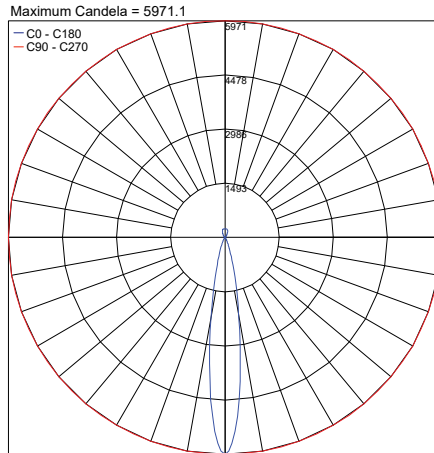


PHOTOMETRIC FILENAME : METOPE_3.2_AS_16+A_3000K_19W.IES

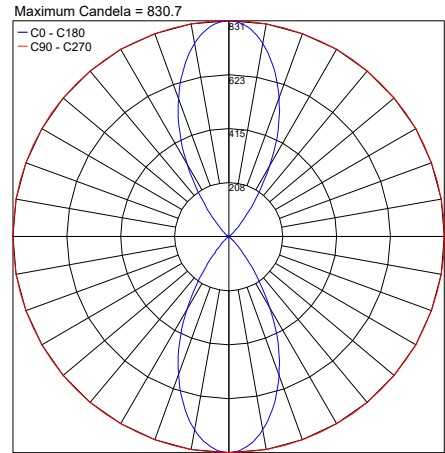


PHOTOMETRIC FILENAME : METOPE_3.2_DD_3000K_19W.IES

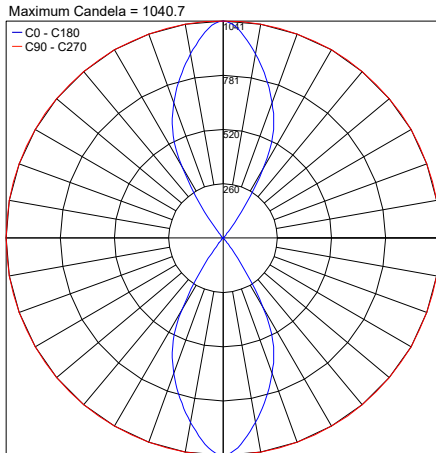


PHOTOMETRIC FILENAME : METOPE_3.2_KK_54_3000K_19W.IES

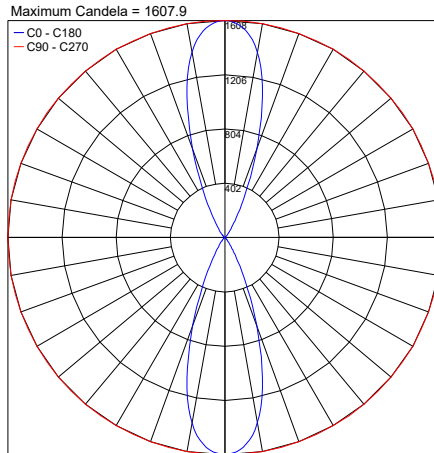


PHOTOMETRIC FILENAME : METOPE_3.2_LL_37_3000K_19W.IES

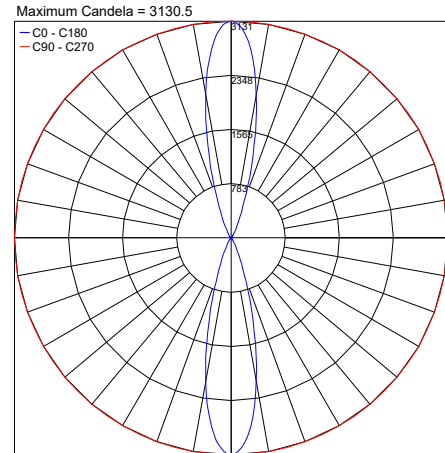

PHOTOMETRIC FILENAME : METOPE_3.2_MM_26_3000K_19W.IES

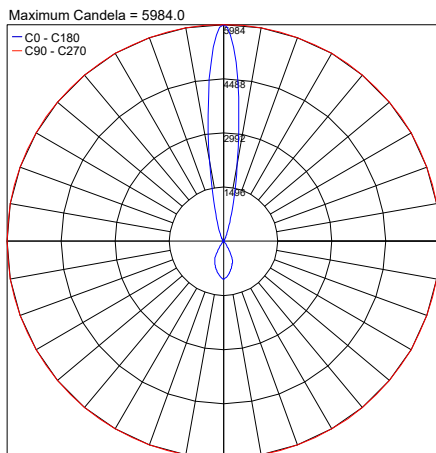

PHOTOMETRIC FILENAME : METOPE_3.2_SK_16+54_3000K_19W.IES

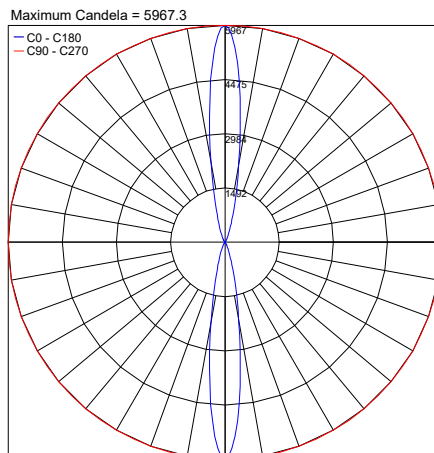

PHOTOMETRIC FILENAME : METOPE_3.2_SS_16_3000K_19W.IES

Job Name/Date:

Fixture Type Designation: