


Metope is a square, single or double beam, wall-mounted, facade light perfect for hospitality or private home outdoor environments. It is available in 3 different sizes, with recessed optics for high visual comfort, 4 optics options, and 4 standard finishes including primer, so that the fixture's surface can be the same paint as the wall it is on allowing it to blend into its surroundings.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 19W (24VDC) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Die-Cast Aluminum Lens: Serigraphed Gray, Tempered, Transparent Extra-Clear Glass |
| CCT | 2200K, 2700K, 3000K, 4000K |
| CRI | >90 |
| BUG Rating | B1-U4-G0 (3000K) |
| Delivered Lumens | 1522 lm (16°, 3000K) |
| Efficacy | 80.1 lm/W (16°, 3000K) |
| Optics | 16°+16°, 16°+54°, 26°+26°, 37°+37°, 54°+54°, Asymmetrical, Asymmetrical + 16°, Diffuse |
| Finishes | 4 Standard, see below |
| Fixture Dimensions | 3.23" w x 4.76" l x 9.45" h |
| Fixture Weight | 4.67 lbs |
| LED Source | 2 COB LEDs |
| Lumen Maintenance | L80, B10 >60,000 hrs (Ta 25°C) |
| Color Consistency | 2-step MacAdam |
| Operating Temp. | -4°F to +122°F |
| IP Rating | IP65 |
| IK Rating | IK05 |

Fixture Dimensions

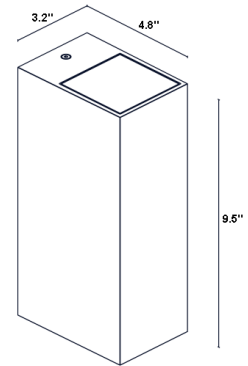

Note: 3.1 and 3.2 models to be mounted to the wall over a single gang switch box.

ORDERING INFORMATION

Example: TM320010015LLT. *Power Supplies / Accessories ordered separately.*

| TM3200 | 1 | | | | |
|-----------|------------|---|--|---|--|
| Model No. | CRI | Honeycomb Louvre | CCT | Optics | Finish |
| TM3200 | 1 - CRI>90 | 000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse optics</i> | N - 2200K F - 2700K 5 - 3000K 9 - 4000K | SS - 16°+16° SK - 16°+54° MM - 26°+26° LL - 37°+37° KK - 54°+54° AA - Asym. AS - Asym + 16° DD - Diffuse | E - White H - Anthracite T - Cor-ten 7 - Primer |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|---|---|---------------|
| PPLT00481 | Non-Dim | 120-277VAC to 24VDC, 24W, Class 2 | 1-1 |
| PPLT00586 | Non-Dim | 120-277VAC to 24VDC, 40W, Class 2 | 1-1 |
| PPLT00709 | ELV / TRIAC & 0-10V Dimming | 120-277VAC to 24VDC, 96W, Class 2, DAMP | 1-4 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-4 |


Suggested Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| PPLT00273 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 24VDC, 40W, Class 2 | 1-1 |
| PPLT00530 | L3D0 | L3D0 | 100%-0.1% | Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-4 |

For other power supply options consult factory.


ACCESSORIES

Anti-glare



Honeycomb Louvre*

*Optical accessory added in ordering matrix
Can be fitted on all optics except for diffuse optics



WDA21_ Spacer

For Spacer include one of the below finishes:


- E** - White
- H** - Anthracite
- T** - Cor-ten
- 7** - Primer
- CR** - Custom RAL (*consult factory*)

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

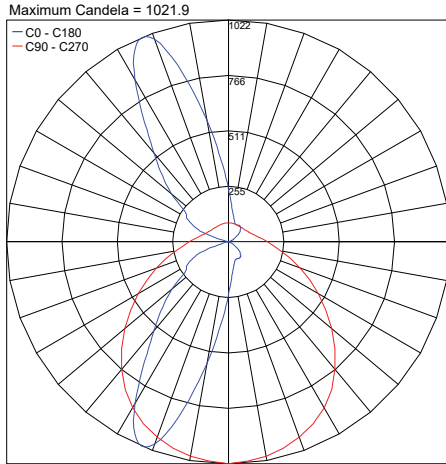


PHOTOMETRIC FILENAME : METOPE_3.2_AA_3000K_19W.IES

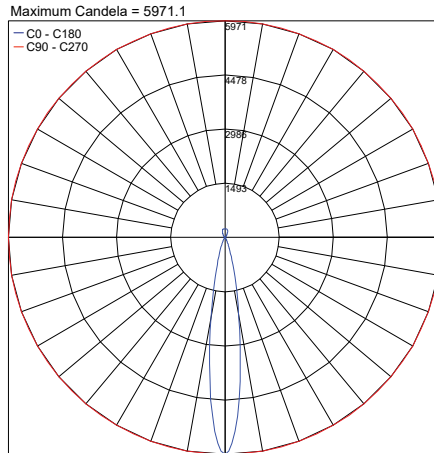


PHOTOMETRIC FILENAME : METOPE_3.2_AS_16+A_3000K_19W.IES

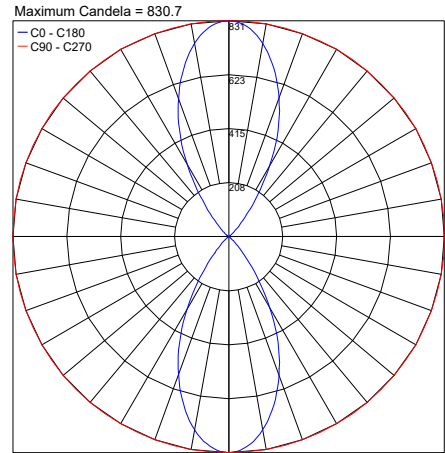


PHOTOMETRIC FILENAME : METOPE_3.2_DD_3000K_19W.IES

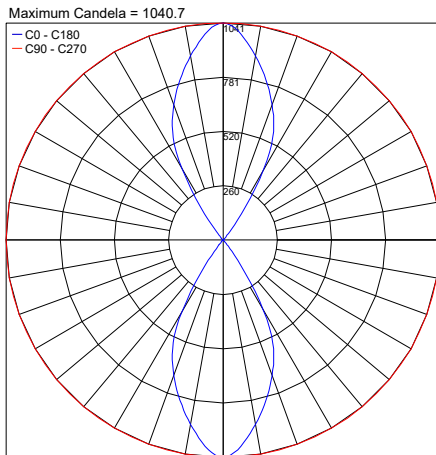


PHOTOMETRIC FILENAME : METOPE_3.2_KK_54_3000K_19W.IES

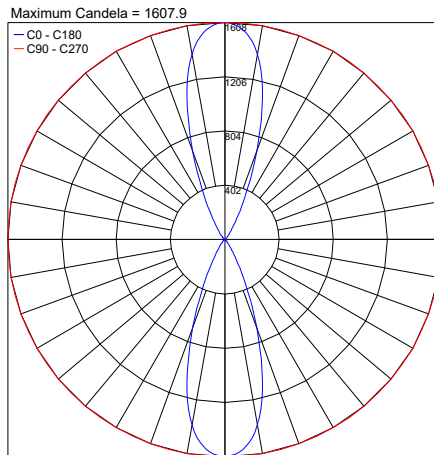


PHOTOMETRIC FILENAME : METOPE_3.2_LL_37_3000K_19W.IES

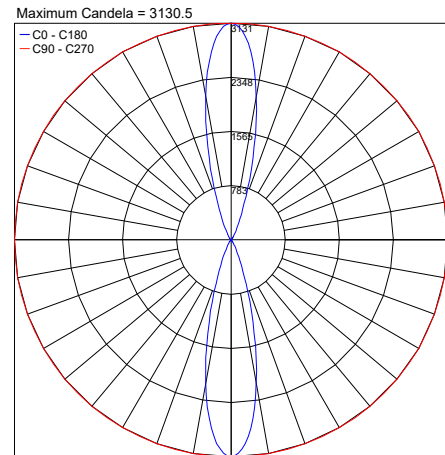

PHOTOMETRIC FILENAME : METOPE_3.2_MM_26_3000K_19W.IES

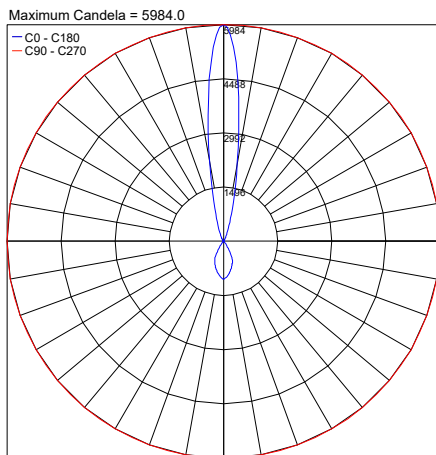

PHOTOMETRIC FILENAME : METOPE_3.2_SK_16+54_3000K_19W.IES

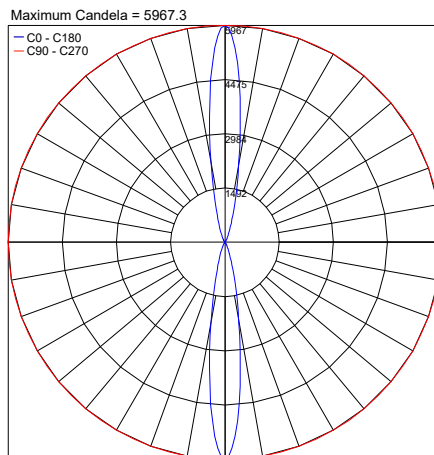

PHOTOMETRIC FILENAME : METOPE_3.2_SS_16_3000K_19W.IES

Job Name/Date:

Fixture Type Designation: