

fog_1 130

CEILING LAMP



WALL LAMP



PROJECTOR



Wattage 2.5W

Voltage 24VDC





Wattage 2.5W

Voltage 24VDC



Wattage 2.5W

Voltage 24VDC

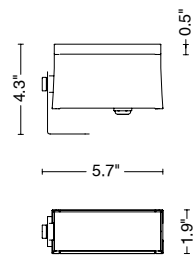


TECHNICAL SPECIFICATIONS

Source lamp	DIFFUSE
Total wattage	LED 2.5W
Voltage	4W
Control	24VDC, 50-60Hz
Light color	On/Off
Luminous flux	3000K (other colors on request**)
Luminous efficacy	115 lm (285 lm***)
McADAM steps	29 lm/W
Beam	3
CRI	Diffuse
Life time	> 90
IP rating	L80-B15 > 60.000 h Ta 40°C
IK rating	IP67
	IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux



E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	3.3	11.45'
6.56'	0.8	22.90'
9.84'	0.4	34.38'
13.12'	0.2	45.83'
16.40'	0.1	57.28'

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Opal glass
Finishing	Polyester powder paint

ORDER CODE

LNFG L1 ___ D H B 10 _

Finishing	G	Black	●
	H	Grey	●
	L	Graphite	●
	U	White	○
	V	Oxide	●
Mounting	POS	Ceiling lamp Wall lamp	
	PR1	Projector	

Example LNFG L1 POS D H B 10 L

INCLUDED ACCESSORIES

CEILING LAMP | WALL LAMP


Code	Description
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	3.28' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (2.95')

fog_1 130

CEILING RECESSED



WALL RECESSED



Wattage 2.5W

Voltage 24VDC

Beam 

Wattage 2.5W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp	LED 2.5W
Total wattage	4W
Voltage	24VDC, 50-60Hz
Control	On/Off
Light color	3000K (other colors on request**)
Luminous flux	115 lm (285 lm***)
Luminous efficacy	29 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Lifetime	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10


DIFFUSE

Source lamp	LED 2.5W
Total wattage	4W
Voltage	24VDC, 50-60Hz
Control	On/Off
Light color	3000K (other colors on request**)
Luminous flux	115 lm (285 lm***)
Luminous efficacy	29 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Lifetime	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC


** Light color available on request
2200K • 2700K • RGBW

*** Source flux

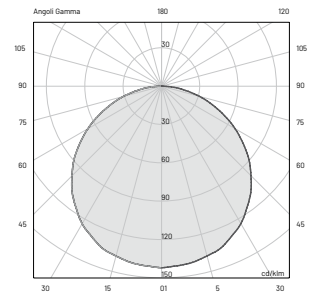


E (FC)


H (ft)	fc (3000K)	Ø (ft)
3.28'	3.3	11.45'
6.56'	0.8	22.90'
9.84'	0.4	22.90'
13.12'	0.2	45.83'
16.40'	0.1	57.28'




recessed installation



flush installation



protruding installation



MATERIALS

<i>Body</i>	Extruded aluminum EN AW6060
<i>Diffuser</i>	Opal glass
<i>Finishing</i>	Polyester powder paint

ORDER CODE

LNFG L1IS0 D H B10 U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
00CCL1.STD	Housing box

fog_1 300

CEILING LAMP



Wattage 12W

Voltage 24VDC



WALL LAMP



Wattage 12W

Voltage 24VDC





PROJECTOR



Wattage 12W

Voltage 24VDC

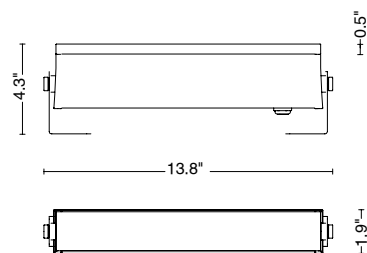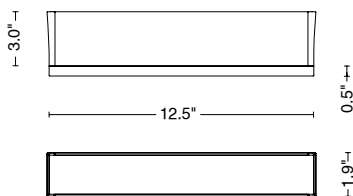


TECHNICAL SPECIFICATIONS

Source lamp	DIFFUSE
Total wattage	LED 12W
Voltage	16W
Control	24VDC, 50-60Hz
Light color	On/Off (other controls on request*)
Luminous flux	3000K (other colors on request**)
Luminous efficacy	510 lm (1340 lm***)
McADAM steps	32 lm/W
Beam	3
CRI	Diffuse
Lifetime	> 90
IP rating	L80-B15 > 60.000 h Ta 40°C
IK rating	IP67
	IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux



E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	15.7	10.53'
6.56'	3.9	21.06'
9.84'	1.8	31.56'
13.12'	1.0	42.09'
16.40'	0.7	52.62'

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Opal glass
Finishing	Polyester powder paint

ORDER CODE

LNFG L 3 ___ D H B 1 0 _

Finishing	G	Black	●
	H	Grey	●
	L	Graphite	●
	U	White	○
	V	Oxide	●
Mounting	POS	Ceiling lamp Wall lamp	
	PRI	Projector	

Example LNFG L 3 POS D H B 1 0 L

INCLUDED ACCESSORIES

CEILING LAMP | WALL LAMP

Code	Description
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	3.28' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (2.95")

AVAILABLE ACCESSORIES

PROJECTOR

Code	Description
00KEYFGL.150_	Fixing kit medium (5.91") (available in fixture finishes, see datasheet)
00KEYFGL.250_	Fixing kit long (9.84") (available in fixture finishes, see datasheet)

fog_1 300

CEILING RECESSED



WALL RECESSED



Wattage 12W

Voltage 24VDC



Wattage 12W



Voltage 24VDC



TECHNICAL SPECIFICATIONS

Source lamp	LED 12W
Total wattage	16W
Voltage	24VDC, 50-60Hz
Control	On/Off (other controls on request*)
Light color	3000K (other colors on request**)
Luminous flux	510 lm (1340 lm***)
Luminous efficacy	32 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10


DIFFUSE



* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light colour available on request
2200K • 2700K • RGBW


*** Source flux




E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	15.7	3.21
6.56'	3.9	6.42
9.84'	1.8	9.62
13.12'	1.0	12.83
16.40'	0.7	16.04


recessed installation



flush installation



protruding installation



MATERIALS

<i>Body</i>	Extruded aluminum EN AW6060
<i>Diffuser</i>	Opal glass
<i>Finishing</i>	Polyester powder paint

ORDER CODE

LNFG L 3 ISO D H B 10 U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
00EY/FGL3.STD	Housing box

fog_1 600

CEILING LAMP



Wattage 24W

Voltage 24VDC



WALL LAMP



Wattage 24W

Voltage 24VDC





PROJECTOR



Wattage 24W

Voltage 24VDC

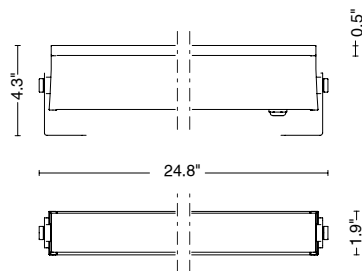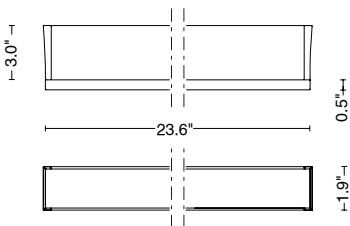


TECHNICAL SPECIFICATIONS

Source lamp	DIFFUSE
Total wattage	LED 24W
Voltage	30W
Control	24VDC, 50-60Hz
Light color	On/Off (other controls on request*)
Luminous flux	3000K (other colors on request**)
Luminous efficacy	1020 lm (2680 lm***)
McADAM steps	34 lm/W
Beam	3
CRI	Diffuse
Life time	> 90
IP rating	L80-B15 > 60.000 h Ta 40°C
IK rating	IP67
	IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux



E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	31.4	10.53'
6.56'	7.9	21.06'
9.84'	3.5	31.56'
13.12'	2.0	42.09'
16.40'	1.3	52.62'

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Opal glass
Finishing	Polyester powder paint

ORDER CODE

LNFG L 6 ___ D H B 1 0 _

Finishing	G	Black	●
	H	Grey	●
	L	Graphite	●
	U	White	○
	V	Oxide	●
Mounting	POS	Ceiling lamp Wall lamp	
	PR1	Projector	

Example LNFG L 6 POS D H B 1 0 L

INCLUDED ACCESSORIES

CEILING LAMP | WALL LAMP

Code	Description
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	3.28' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (2.95")

AVAILABLE ACCESSORIES

PROJECTOR

Code	Description
00KEYFGL.150_	Fixing kit medium (5.91") (available in fixture finishes, see datasheet)
00KEYFGL.250_	Fixing kit long (9.84") (available in fixture finishes, see datasheet)

fog_1 600

CEILING RECESSED



WALL RECESSED



Wattage 24W

Voltage 24VDC

Beam 

Wattage 24W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Lifetime

IP rating

IK rating

DIFFUSE

LED 24W

30W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1020 lm (2680 lm***)

34 lm/W

3

Diffuse

> 90

L80-B15 > 60.000 h T_a 40°C



IP67

IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light colour available on request
2200K • 2700K • RGBW


*** Source flux




E (FC)

H (ft)	f _c (3000K)	Ø (ft)
3.28'	31.4	10.53'
6.56'	7.9	21.06'
9.84'	3.5	31.56'
13.12'	2.0	42.09'
16.40'	1.3	52.62'


recessed installation



flush installation



protruding installation



MATERIALS

<i>Body</i>	Extruded aluminum EN AW6060
<i>Diffuser</i>	Opal glass
<i>Finishing</i>	Polyester powder paint

ORDER CODE

LNFG L 6 ISO D H B 10 U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
00EY/FGL6.STD	Housing box

fog_1 900

CEILING LAMP



Wattage 34W

Voltage 24VDC




WALL LAMP



Wattage 34W

Voltage 24VDC





PROJECTOR



Wattage 34W

Voltage 24VDC

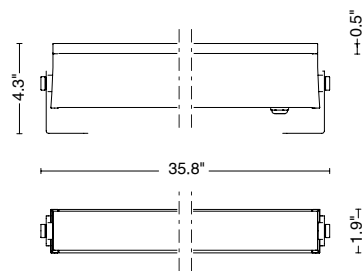


TECHNICAL SPECIFICATIONS

Source lamp	DIFFUSE
Total wattage	LED 34W
Voltage	38W
Control	24VDC, 50-60Hz
Light color	On/Off (other controls on request*)
Luminous flux	3000 K (other colors on request**)
Luminous efficacy	1294 lm (3120 lm***)
McADAM steps	34 lm/W
Beam	3
CRI	Diffuse
Life time	> 90
IP rating	L80-B15 > 60.000 h Ta 40°C
IK rating	IP67
	IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light colour available on request
2200K • 2700K • RGBW

*** Source flux

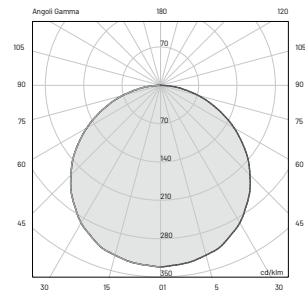

E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	40.0	10.53'
6.56'	10.0	21.06'
9.84'	4.5	31.56'
13.12'	2.5	42.09'
16.40'	1.6	52.62'

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Opal glass
Finishing	Polyester powder paint

ORDER CODE

LNFG L 9 _ _ _ _ D H B 1 0 _

Finishing	G	Black	●
	H	Grey	●
	L	Graphite	●
	U	White	○
	V	Oxide	●
Mounting	POS	Ceiling lamp Wall lamp	
	PR1	Projector	

Example LNFG L 9 POS D H B 1 0 L

INCLUDED ACCESSORIES

CEILING LAMP | WALL LAMP

Code	Description
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	3.28' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (2.95')

AVAILABLE ACCESSORIES

PROJECTOR

Code	Description
00KEYFGL.150_	Fixing kit medium (5.91') (available in fixture finishes, see datasheet)
00KEYFGL.250_	Fixing kit long (9.84') (available in fixture finishes, see datasheet)

fog_1 900

CEILING RECESSED



WALL RECESSED



Wattage 34W

Voltage 24VDC

Beam 

Wattage 34W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

DIFFUSE

LED 34W

38W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1294 lm (3120 lm***)

34 lm/W

3

Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C



IP67

IK10

* **Control available on request**
DALI - 0/10V - DMX - TRIAC

** **Light color available on request**
2200K • 2700K • RGBW


*** Source flux

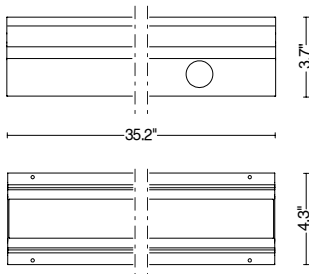


E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	40.0	10.53'
6.56'	10.0	21.06'
9.84'	4.5	31.56'
13.12'	2.5	42.09'
16.40'	1.6	52.62'


recessed installation



flush installation



protruding installation



MATERIALS

<i>Body</i>	Extruded aluminum EN AW6060
<i>Diffuser</i>	Opal glass
<i>Finishing</i>	Polyester powder paint

ORDER CODE

LNFG L 9 ISO D H B 10 U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
-	1.64' (0.5 m) length cable -05RN-F
-	Single connection IP68

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
00EY/FGL9.STD	Housing box



