

fog_s 80

CEILING LAMP



Wattage 5.5W

Voltage 24VDC

Beam 

WALL LAMP



Wattage 5.5W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

CEILING LAMP

DIFFUSE

LED 5.5W

5.5W

24VDC

Power supply not included
(other controls on request*)

3000K (other colors on request**)

205 lm (759 lm***)

37 lm/W

3

diffuse

> 90

L80-B15 > 60.000 h Ta 40°C




IP67

IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux

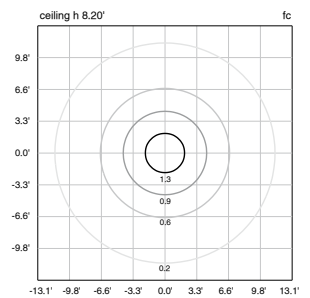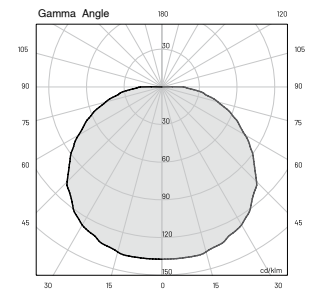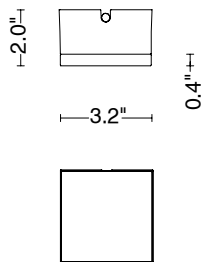

WALL LAMP

DIFFUSE

LED 5.5W

5.5W

24VDC

Power supply not included
(other controls on request*)

3000K (other colors on request**)

205 lm (759 lm***)

37 lm/W

3

diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

MATERIALS

Body

Die-cast aluminum EN47100

Diffuser

Opal glass

Finishing

Polyester powder paint

ORDER CODE

LNFG 55 POS D H B 7 Z _

Finishing

G Black



H Grey



L Graphite



U White





V Oxide



Example

FG 55 POS D H B 7 Z L

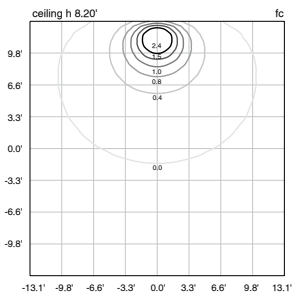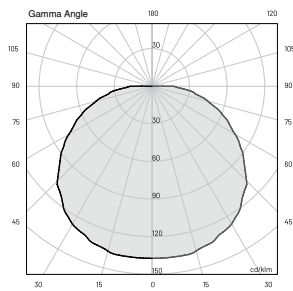

INCLUDED ACCESSORIES

Code

Description

- 0.5 m (1.6') length cable -05RN-F

- Single connection IP68

fog_s 80

CEILING RECESSED




Wattage 5.5W

Voltage 24VDC

Beam 

WALL RECESSED



Wattage 5.5W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light colour

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

CEILING RECESSED

DIFFUSE

LED 5.5W

5.5W

24VDC

Power supply not included
(other controls on request*)

3000K (other colors on request**)

205 lm (759 lm***)

38 lm/W

3

diffuse

> 90

L80-B15 > 60.000 h Ta 40°C




IP67

IK10


* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW


*** Source flux

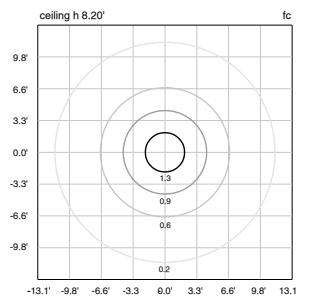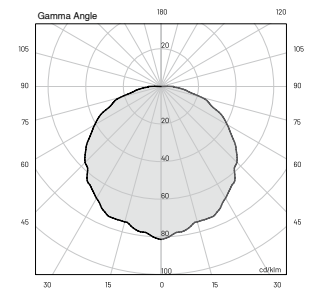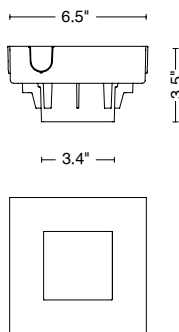


recessed installation



flush installation



protruding installation



WALL RECESSED

DIFFUSE

LED 5.5W

5.5W

24VDC

Power supply not included
(other controls on request*)

3000K (other colors on request**)

205 lm (759 lm***)

38 lm/W

3

diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

MATERIALS

Body

Die-cast aluminum EN47100

Diffuser

Opal glass

Finishing

Polyester powder paint

ORDER CODE



FG 5 5 ISO D H B 7 Z U

INCLUDED ACCESSORIES

| Code | Description |
|------|-----------------------------------|
| - | 0.5 m (1.6') length cable -05RN-F |
| - | Housing box |

AVAILABLE ACCESSORIES

| Code | Description |
|-----------|-------------------------------|
| 00KCG0.02 | Recessed box adjusting kit |
| 0303003 | Glass lifting suction pad |
| 0404M011 | Single connection IP68 |
| 0404M019 | Three-way connection box mini |

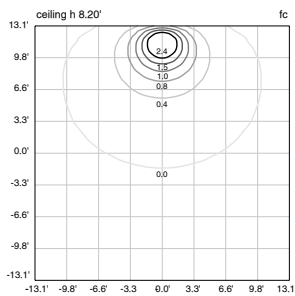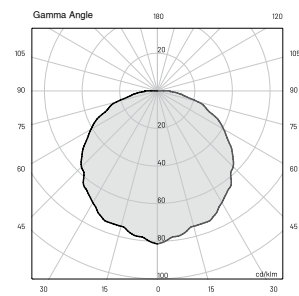

fog_s 125

CEILING LAMP



Wattage 10W

Voltage 24VDC

Beam 

WALL LAMP



Wattage 10W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

CEILING LAMP

DIFFUSE

LED 10W

12W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

490 lm (1300 lm***)

41 lm/W

3

Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C




IP67

IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200 K • 2700 K • RGBW

*** Source flux

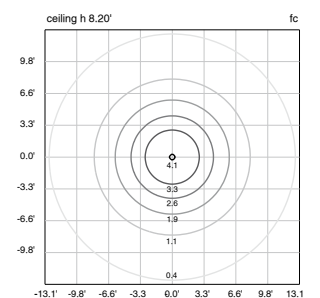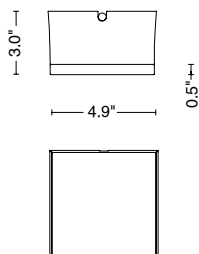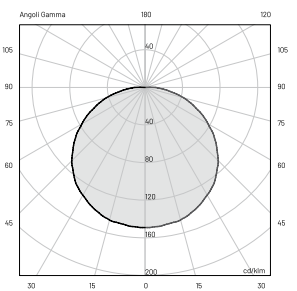

WALL LAMP

DIFFUSE

LED 10W

12W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

490 lm (1300 lm***)

41 lm/W

3



Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

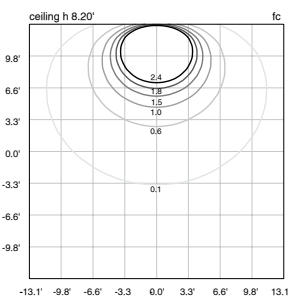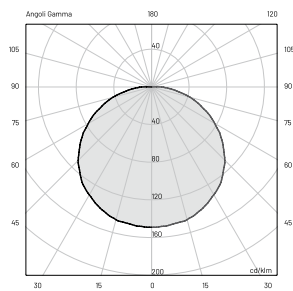

MATERIALS

Body

Die-cast aluminum EN47100

Diffuser

Opal glass

Finishing

Polyester powder paint

ORDER CODE

LNFG 65 POS D H B 10 _

Finishing

G Black



H Grey



L Graphite



U White



V Oxide



Example

LNFG 65 POS D H B 10 L

INCLUDED ACCESSORIES

Code

Description

-

0.5 m (1.6') length cable -05RN-F

-

Single connection IP68

fog_s 125

CEILING RECESSED



WALL RECESSED



Wattage 10W

Voltage 24VDC

Beam 

Wattage 10W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

CEILING RECESSED

DIFFUSE

LED 10 W

12 W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000 K (other colors on request**)

490 lm (1300 lm***)

41 lm/W

3


Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67



IK10

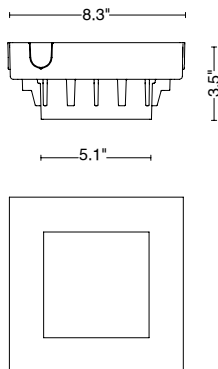


* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW


*** Source flux

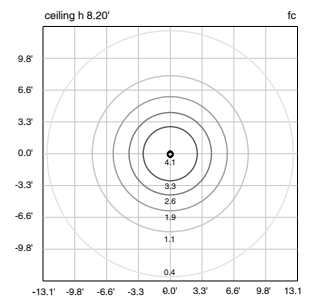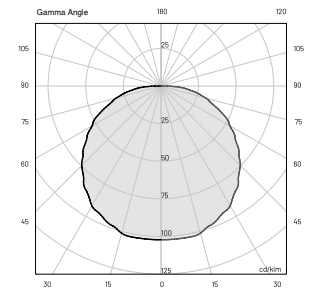


recessed installation



flush installation



protruding installation



WALL RECESSED

DIFFUSE

LED 10W

12W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

490 lm (1300 lm***)

41 lm/W

3

Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

MATERIALS

Body

Die-cast aluminum EN47100

Diffuser

Opal glass

Finishing

Polyester powder paint

ORDER CODE



LNFG 65 ISO D H B 10 U

INCLUDED ACCESSORIES

| Code | Description |
|------|------------------------------------|
| - | 0.5 m (1.64') length cable -05RN-F |
| - | Housing box |

AVAILABLE ACCESSORIES

| Code | Description |
|-----------|-------------------------------|
| 00KCG0.03 | Recessed box adjusting kit |
| 0303004 | Glass lifting suction pad |
| 0404M011 | Single connection IP68 |
| 0404M019 | Three-way connection box mini |

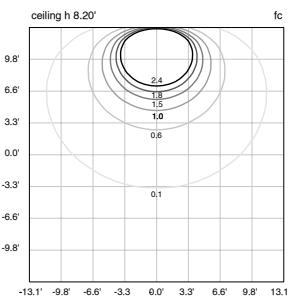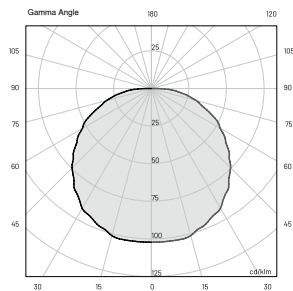

fog_s 200

CEILING LAMP



Wattage 21W

Voltage 24VDC

Beam 

WALL LAMP



Wattage 21W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

CEILING LAMP

DIFFUSE

LED 21W

26.5W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000 K (other colors on request**)

942 lm (2920 lm***)

36 lm/W

3

Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C




IP67

IK10

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux

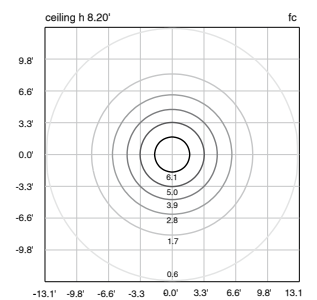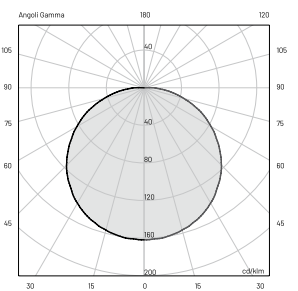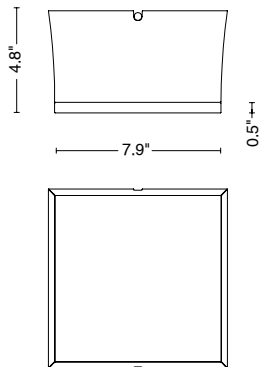

WALL LAMP

DIFFUSE

LED 21W

26.5W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000 K (other colors on request**)

942 lm (2920 lm***)

36 lm/W

3



Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

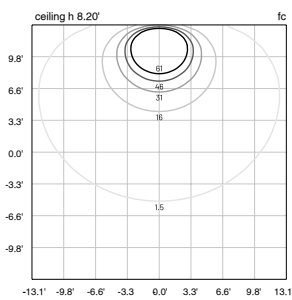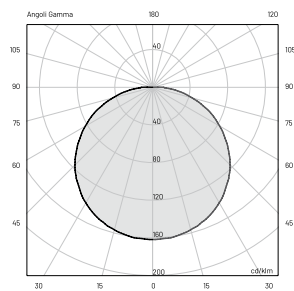

MATERIALS

| | |
|-----------|---------------------------|
| Body | Die-cast aluminum EN47100 |
| Diffuser | Opal glass |
| Finishing | Polyester powder paint |

ORDER CODE

LNFG 85 POS D H B 10 _

| | | | |
|-----------|---|----------|---|
| Finishing | G | Black | ● |
| | H | Grey | ● |
| | L | Graphite | ● |
| | U | White | ○ |
| | V | Oxide | ● |

Example LNFG 85 POS D H B 10 L

INCLUDED ACCESSORIES

| Code | Description |
|------|------------------------------------|
| - | 0.5 m (1.64') length cable -05RN-F |
| - | Single connection IP68 |

fog_s 200

CEILING RECESSED



Wattage 21W

Voltage 24VDC

Beam 

WALL RECESSED



Wattage 21W

Voltage 24VDC

Beam 

TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light colour

Luminous flux

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

CEILING RECESSED

DIFFUSE

LED 21W

26.5W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000K (other colours on request**)

942 lm (2920 lm***)

36 lm/W

3


Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67


IK10

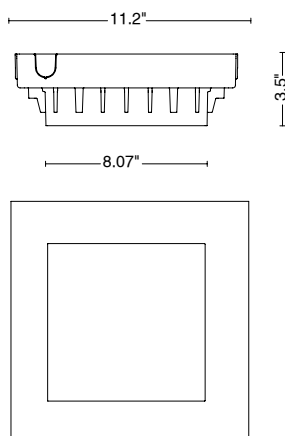

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW


*** Source flux

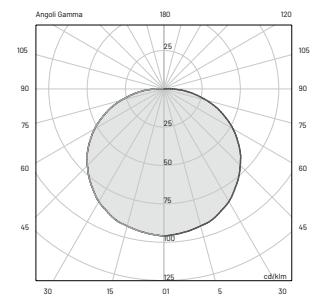


E (FC)

| H (ft) | fc (3000K) | Ø (ft) |
|--------|------------|--------|
| 3.28' | 26.0 | 12.80' |
| 6.56' | 6.5 | 25.52' |
| 9.84' | 2.9 | 38.32' |
| 13.12' | 1.6 | 51.08' |
| 16.40' | 1.0 | 63.91' |


recessed installation



flush installation



protruding installation



WALL RECESSED

DIFFUSE

LED 21W

26.5W

24VDC, 50-60Hz

On/Off (other controls on request*)

3000 K (other colors on request**)

942 lm (2920 lm***)

36 lm/W

3

Diffuse

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

MATERIALS

Body

Die-cast aluminum EN47100

Diffuser

Opal glass

Finishing

Polyester powder paint

ORDER CODE


LNFG 85 ISO D H B 10 U

INCLUDED ACCESSORIES

| Code | Description |
|------|------------------------------------|
| - | 0.5 m (1.64') length cable -05RN-F |
| - | Housing box |

AVAILABLE ACCESSORIES

| Code | Description |
|-----------|-------------------------------|
| 00KCG0.04 | Recessed box adjusting kit |
| 0303004 | Glass lifting suction pad |
| 0404M011 | Single connection IP68 |
| 0404M019 | Three-way connection box mini |

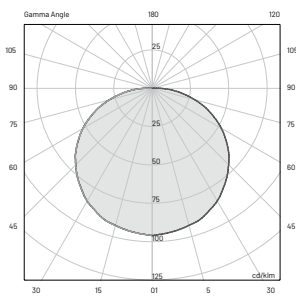

E (FC)

| H (ft) | fc (3000K) | Ø (ft) |
|--------|---------------|--------|
| 3.28' | 26.0 | 12.80' |
| 6.56' | 6.5 | 25.52' |
| 9.84' | 2.9 | 38.32' |
| 13.12' | 1.6 | 51.08' |
| 16.40' | 1.0 | 63.85' |