


Z1 is a miniaturized indoor floodlight (Ø0.9") suitable for installation on walls or ceilings. It is completely 360°adjustable over its vertical and horizontal axes, guaranteeing high performances with minimum visual impact thanks to its invisible joints. Available in 22° or 50° optics with white or opaque black standard finishes.

TECHNICAL DATA


Wattage / Input	6W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
BUG Rating	B1-U0-G0 (22°, 3000K) B0-U0-G0 (50°, 3000K)
Delivered Lumens	452 lm (3000K)
Efficacy	75.3 lm/W
Optics	22°, 50°
Finishes	White or Opaque Black
Fixture Dimensions	5.3" l x Ø0.9" - Mount. Box 3.9" x 1.2" (Integral) 4.7" l x Ø0.9" - Mount. Box 1.6" x 0.6" (Remote)
Fixture Weight	0.88 lbs
IP Rating	IP40



Fixture Dimensions

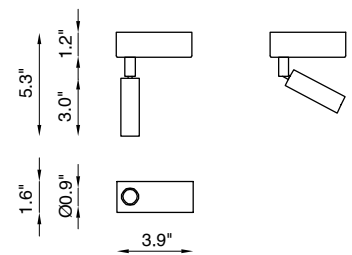

Integral



Remote

ORDERING INFORMATION

Example: BU1122.BL.4S.50.E.30.WD.US. Power Supplies ordered separately.

BU1122	.		.	4S	.		.	E	.		.	WD	.	US
Model No.		Finish		Optics						CCT		Power		
BU1122 - Remote		WH - White BL - Black		22 - 22° 50 - 50°		E				27 - 2700K 30 - 3000K 40 - 4000K		WD - Remote		US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	2-2
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	3-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-4
PPLT00561-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
PPLT00676	PEQE	PEQE	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120-277VAC to 500mA, 20W, Class 2	2-3
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-4

For other power supply options consult factory.

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 878.1

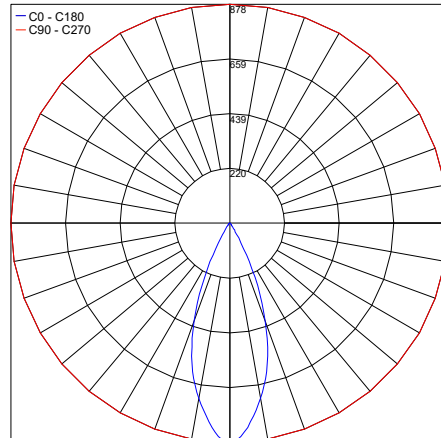

PHOTOMETRIC FILENAME : Z1 22° - BU1121BL4S22E30ND.IES

Maximum Candela = 436.4

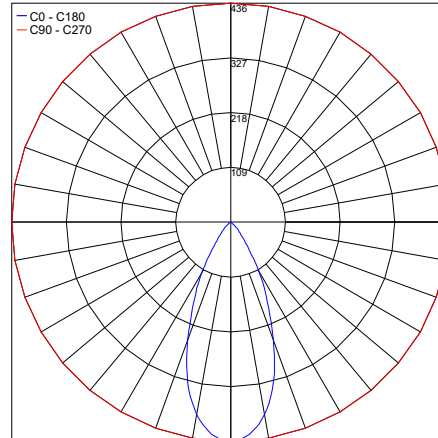

PHOTOMETRIC FILENAME : Z1 50° - BU1121BL4S50E30ND.IES

Job Name/Date:

Fixture Type Designation: