

IDROROUND IP65


Ildraround IP65 is a recessed luminaire made of Coral Waterout® for installation in walls or ceilings inside spas, wellness clubs or moist environments. It has an aperture of Ø3.5" with a wide 40° beam and 3000K as standard.



TECHNICAL DATA

Wattage / Input	9W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Coral Waterout®
CCT	3000K (2700K, 4000K on request, consult factory)
CRI	>90
BUG Rating	B1-U0-G0
LED Lumens	557 lm (3000K)
Efficacy	61.9 lm/W (3000K)
Optics	40° Wide Beam
Finishes	Unfinished
Fixture Dimensions	Ø5.9" x 4.3" h
Cut-Out Dimensions	Ø6.3"
Aperture	Ø3.5"
Fixture Weight	2.4 lbs
IP Rating	IP65

Fixture Dimensions



The body is made of Coral WaterOut® a unique patented composite material highly resistant to water penetration - made from modifying the structure of Coral®. This water-repellant effect remains unchanged over time as it is not a matter of a superficial finish, but rather a structural feature of the material itself.

This material is therefore ideally suited to IP65/IP44-rated recessed lighting, suitable for use in external environments, and ideal for light systems in spas, wellness clubs, massage centres, swimming-pools, bathrooms, and all other locations where water and humidity restrict the choice of technical lighting.

ORDERING INFORMATION

Example: BU5593.Z.CW.US. Power Supplies ordered separately.

	CW	US
Model No.	Finish	
BU5593.Z	CW - Coral Waterout®	US
BU5599.Z (Emergency)		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-3
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-2 (1-8)

Suggested Lutron Compatible Drivers

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 10W	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	1-2
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 27W	2-2

For other power supply options consult factory.

ACCESSORIES

Installation (Optional)

5593.Z.CW (BR5593LT)


Brick & Concrete Back Box

Consult factory for back box options.

PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 685

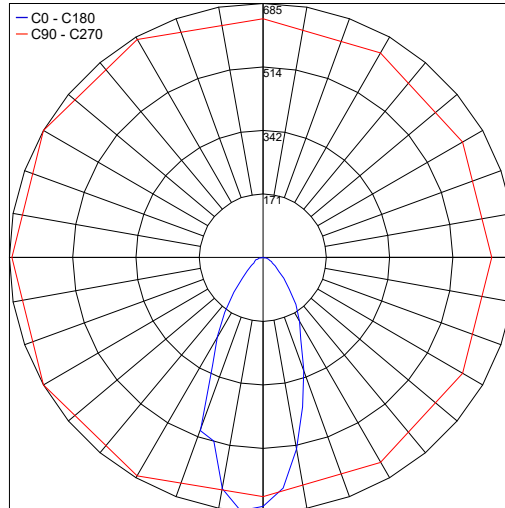

Job Name/Date:

Fixture Type Designation: