




# **Idroround IP65**







## OTHER AVAILABLE CODES

BU5593.Z.27.CW 40° 2700K light color

BU5593.Z.40.CW 4000K (on request) light color

example of code

BU5599.CW 4 R 40 M 30 WD

## **TECHNICAL FEATURES**

Code BU5593.Z.CW Downlight 90°

CW: Coral WaterOut® I waterproof Material 2.43 lbs

Mounting Ceiling recessed IP65 IP rating

Constant current electronic driver (not included) Control gear

Cut out for plasterboard

LED 500mA Lamp type **1.** Vf: 18VDC  $1 \times 9W$ Lamp wattage Luminous efficacy 1 × 1125 lm - 3000K

Wide beam 40° Light distribution Fitting Light color White 3000K

Ø 3.54 in Light hole Voltage connection By driver (optional)

>90 Other available light colors:

## **OPTIONAL**

Brick box cod. BR5593LT cod. BR5591LT




79 Trenton Avenue Frenchtown, NJ 08825




# Idroround IP65 Dim to Warm









## **TECHNICAL FEATURES**

Code BU5595.CW 4 R 40 M 98 WD Downlight 90° Type

CW: Coral WaterOut® I waterproof Material

2.43 lbs Weight Ceiling recessed Mounting IP65 IP rating

Remote driver\*\* (not included) Control gear

A: 5.91 in Dimensions Cut out for plasterboard  $\emptyset$  6.30 in Lamp type LED 350mA

L. Vf: 17VDC Lamp wattage  $1 \times 6W$ 

1 × 600 lm (from 1800K up to 3000K) Luminous efficacy

Light distribution Wide beam 40°

Fitting

Light color Dimming range 1800/3000K

Ø 3.54 in Light hole By driver (optional) Voltage connection

CRI Note

>90

\*\*Idrout IP65 Dim to Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.


#### **OPTIONAL**

cod. BR5495LT Brick box



79 Trenton Avenue Frenchtown, NJ 08825

Tel: (908) 996-7710 Fax: (908) 996-7042

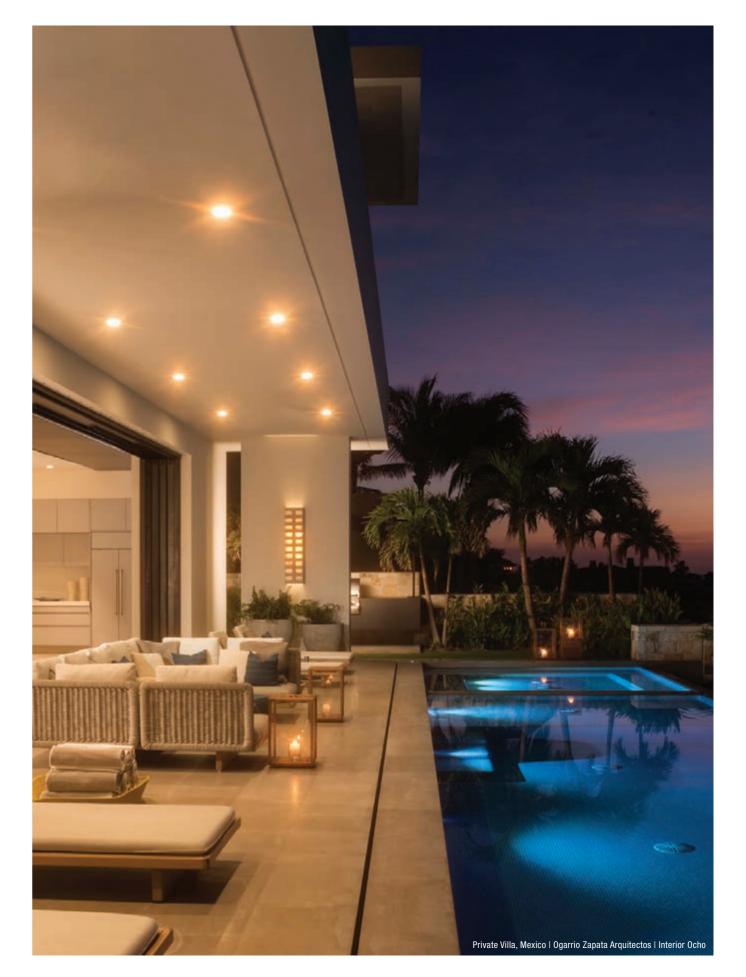

 $<sup>^{\</sup>circ}$  The absorption capacity per  $ft^{3}$  calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of  $8.86\ ft$  in height and therefore expressed in  $ft^{2}$