

# INVISILED IP44 / IP65



MINIMUM DIMENSIONS: 1.6" x 1.6"


*Invisiled IP44/IP65 is a totally disappearing outdoor recessed luminaire made of Coral WaterOut<sup>®</sup>, installable on plasterboard or brick walls and ceilings. This product becomes invisible to lend an added value to the role of light in outdoor spaces: a discreet and minimal style, a real bright guide, able to reinvent the architecture, adding quality to the environment. A versatile luminaire, that enhances spaces blending together with them, in order to create settings of light.*



79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042

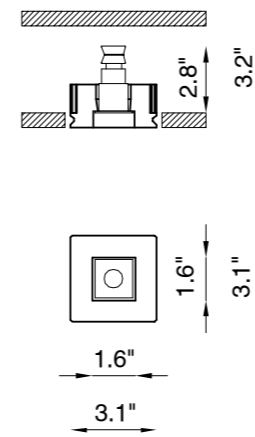

## TECHNICAL FEATURES

	BU6349.CW	BU6347.CW
Code	BU6349.CW	BU6347.CW
Type	Downlight 90°   Wall lamp 90° ▲▲	Downlight 90°   Wall lamp 90° ▲▲
Material	CW: Coral WaterOut <sup>®</sup>   waterproof	CW: Coral WaterOut <sup>®</sup>   waterproof
Weight	0.7 lbs	0.7 lbs
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP44	IP65
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	3.5" x 3.5"	3.5" x 3.5"
Lamp type	LED	LED
Lamp wattage	⚡ Vi: 3 VDC 1W - 350mA   2W - 500mA	⚡ Vi: 3 VDC 1W - 350mA   2W - 500mA
Luminous efficacy	75 lm - 3000K 350mA 170 lm - 3000K 500mA	75 lm - 3000K 350mA 170 lm - 3000K 500mA
Light distribution	Narrow beam 14°	Narrow beam 14°
Fitting	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Light hole	1.6" x 1.6"	1.6" x 1.6"
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	-
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

