


M1

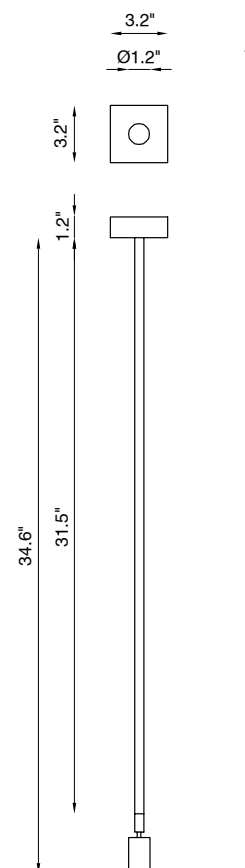

M1 is a suspended indoor luminaire installable on ceiling: it is composed by a pole which scatters light in a direct and punctual manner. It is also provided by a projector adjustable up to 360°, which allows to redirect the luminescent beam towards the single details within the space. A suspended lamp of minimal design and emanating a spot light, available with different lens. For the model installable on ceilings, it is possible to choose between two versions: one with a case including the driver and one with a minimal lowered case with remote driver installation.

CODE COMPOSITION

BU1501		_ 2 S _ E _ ND	
		<i>light color</i>	
	27	2700K	
	30	3000K	
	40	4000K	
		<i>lens</i>	
	22	22°	
	50	50°	
		<i>finishing</i>	
	WH	white	
	BL	black	

example of code composition BU1501 BL 2 S 22 E 30 ND

TECHNICAL FEATURES


Code	BU1501 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	1.65 lbs
Mounting	Ceiling
IP rating	IP40
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Voltage connection	xxx - 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

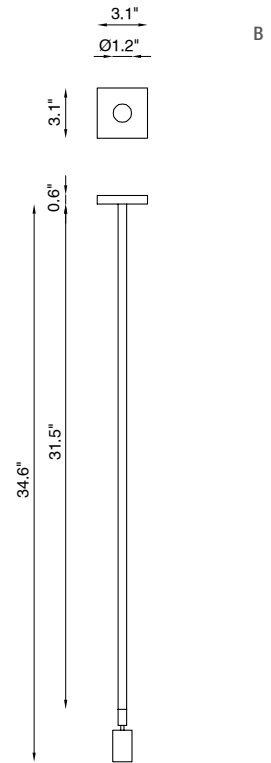



CODE COMPOSITION

BU1502_2 S_E_WD	
<i>light color</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
22	22°
50	50°
<i>finishing</i>	
WH	white
BL	black

example of code composition BU1502 BL 2 S 22 E 30 WD

TECHNICAL FEATURES

Code	BU1502 XX (fig. B)
Type	Projector ± 360° / ± 90° 
Material	Aluminum
Finishing	White Black
Weight	1.65 lbs
Mounting	Ceiling
IP rating	IP40
Control gear	Constant current electronic driver, remote installation (not included)
Cut out for plasterboard	-
Lamp type	LED 500 mA  Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Voltage connection	xxx - 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation.



M1 custom version
 Concept - Fedorova Architects - Russia