


GL is a professional adjustable floodlight suitable for installation on walls, ceilings or rails. Capable of high performance, it is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically. Available in 24° or 38° optics with white or black standard finishes.

TECHNICAL DATA

Wattage	26W
Power Supply	Integral 120VAC
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>80
BUG Rating	—
Delivered Lumens	2938 lm (24°, 3000K)
Efficacy	113 lm/W (24°, 3000K)
Optics	24°, 38°
Finishes	White, Black
Fixture Dimensions	Ø2.8" x 4.3" l - Mount. Box 6.3" l x 1.2" h
Fixture Weight	2.6 lbs
IP Rating	IP40



Fixture Dimensions

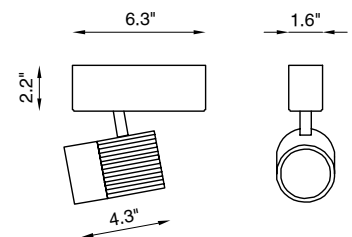

PHOTOMETRIC DATA

Coming Soon

ORDERING INFORMATION

Example: BU1016.BL.2S.24.E.30.ND.US. Power Supplies ordered separately.

BU1016		2S		E		ND	US
Model No.	Finish	Installation	Optics		CCT	Power	
BU1016	WH - White BL - Black	2S - Surface	24 - 24° 38 - 38°	E	27 - 2700K 30 - 3000K 40 - 4000K	ND	US

Job Name/Date:

Fixture Type Designation: