


GL is a professional adjustable floodlight suitable for installation on walls, ceilings or rails. Capable of high performance, it is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically. Available in 24° or 38° optics with white or black standard finishes.



**TECHNICAL DATA**

<b>Wattage / Input</b>	26W (120VAC)
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>80
<b>BUG Rating</b>	—
<b>Delivered Lumens</b>	2938 lm (24°, 3000K)
<b>Efficacy</b>	113 lm/W (24°, 3000K)
<b>Optics</b>	24°, 38°
<b>Finishes</b>	White, Black
<b>Fixture Dimensions</b>	Ø2.8" x 4.3"   - Mount. Box 6.3"   x 1.2" h
<b>Fixture Weight</b>	2.6 lbs
<b>IP Rating</b>	IP40

Fixture Dimensions

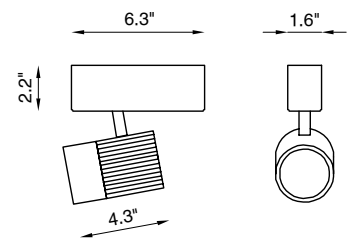

**PHOTOMETRIC DATA**

Coming Soon

**ORDERING INFORMATION**

Example: BU1016.BL.2S.30.E.38.ND.US. Power Supplies ordered separately.

BU1016	.		.	2	.		.		.	E	.		.	ND	.	US
Model No.	Finish		Installation	CCT		Optics	Power									
BU1016	WH - White BL - Black	2	S - Surface T - Track	27 - 2700K 30 - 3000K 40 - 4000K	E	24 - 24° 38 - 38°	ND	US								

Job Name/Date:

Fixture Type Designation: