


GL

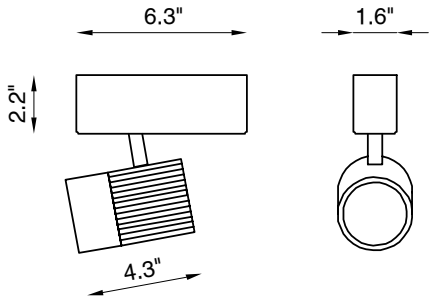

CODE COMPOSITION

|        |   |   |    |                     |
|--------|---|---|----|---------------------|
| BU1016 | 2 | E | ND |                     |
|        |   |   |    | <i>light color</i>  |
|        |   |   | 27 | 2700K               |
|        |   |   | 30 | 3000K               |
|        |   |   | 40 | 4000K               |
|        |   |   |    | <i>lens</i>         |
|        |   |   | 24 | 24°                 |
|        |   |   | 38 | 38°                 |
|        |   |   |    | <i>installation</i> |
|        |   |   | S  | surface             |
|        |   |   |    | <i>finishing</i>    |
|        |   |   | WH | white               |
|        |   |   | BL | black               |

example of code composition BU1016 WH 2 S 24 E 30 ND

TECHNICAL FEATURES

|                          |                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------|
| Code                     | BU1016                                                                                                    |
| Type                     | Projector +/- 360°<br> |
| Material                 | Aluminum                                                                                                  |
| Finishing                | White I Black                                                                                             |
| Weight                   | 2.6 lbs                                                                                                   |
| Mounting                 | Wall and ceiling                                                                                          |
| IP rating                | IP40                                                                                                      |
| Control gear             | Constant current electronic driver on board                                                               |
| Cut out for plasterboard | -                                                                                                         |
| Lamp type                | LED<br>              |
| Lamp wattage             | 1 x 26W                                                                                                   |
| Luminous efficacy        | 113 lm/W - 3000K                                                                                          |
| Light distribution       | Beam 24°<br>Beam 38° (on request)                                                                         |
| Fitting                  | -                                                                                                         |
| Light color              | White 3000K<br>White 2700K I 4000K (on request)                                                           |
| Voltage connection       | 120VAC - 50/60Hz                                                                                          |
| CRI                      | >80                                                                                                       |
| Emergency                | On request                                                                                                |



79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042