


GL

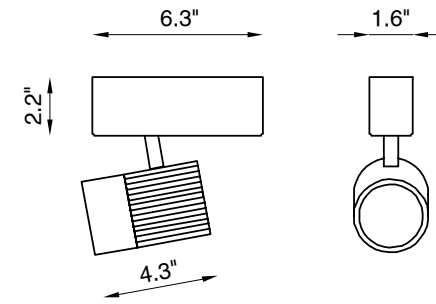

A punctual point of view able to emphasize details and exclusive spaces: GL, installable on ceilings, walls or rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically.

CODE COMPOSITION

BU1016		2		E		ND	
		<i>light color</i>					
	27						2700K
	30						3000K
	40						4000K
		<i>lens</i>					
	24						24°
	38						38°
		<i>installation</i>					
	S						surface
	T						track
		<i>finishing</i>					
	WH						white
	BL						black

example of code composition BU1016 WH 2 S 24 E 30 ND

TECHNICAL FEATURES

Code	BU1016
Type	Projector +/- 360°
Material	Aluminum
Finishing	White Black
Weight	2.6 lbs
Mounting	Wall and ceiling
IP rating	IP40
Control gear	Constant current electronic driver on board
Cut out for plasterboard	-
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	113 lm/W - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Voltage connection	120VAC · 50/60Hz
CRI	>80
Emergency	On request



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042