MLL (MARY'S LITTLE LAMBDA) ATHENA



datasheet

MLL (Mary's Little Lambda) is a smaller version of the minimalist lighting solution Lambda, using the Lutron Athena Wireless Node, that offers linear spread upper and diffused lower light emissions. Small details such as no power cord maintain the minimalist idea without sacrificing function in the field. It is available in an 8" length with multiple color temperature and finish options.

TECHNICAL DATA

Wattage / Input	16.5W (120-277VAC)			
Power Supply	Integral (0-10V Dimming)			
Construction	Body: Extruded Aluminum Mounting: Aircraft Cable			
ССТ	2700K, 3000K, 3500K, 4000K			
CRI	>90			
Delivered Lumens	Coming Soon			
Efficacy	Coming Soon			
Optics	Up: Linear Spread, Down: Diffuse			
Finishes	4 Standard, See Below.			
Fixture Dimensions	4.04" x 7.75" See page 2.			
LED Source	Mid-Power LEDs			
IP Rating	IP20			



MADE IN THE U.S.A.

Fixture Dimensions See Drawing on page 2.

Athena Controls by Others

Up and Down dim together (Separate Dimming on request)

ORDERING INFORMATION

Example: MLL-A-8-30-P-11-C-SC.

MLL-A	- 8	_	- P	-	- C	-
Model No.	Length	ССТ	Body	Finish	Driver	Canopy
MLL-A	8 - 8 inch	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	P - Pendant	02 - Black Suede18 - Textured BronzeTS - Silver11 - White Suede99 - Custom	C - 120-277VAC, 0-10V Dimming	RC - Recessed* SC - Surface* RW - Recessed, White SW - Surface, White AS - Surface Acoustical Tile* AW - Surface Acoustical Tile, White * Same finish as fixture - Other color on request -

Job Name/Date: Fixture Type Designation:


P: 908-996-7710 F: 908-996-7042 Published: February 22, 2024

NOTE: AS & AW utilize a rosette mounting pattern to allow direct mounting to a junction box that will hold a minimum of 50 lbs.




datasheet

FIXTURE DIMENSIONS

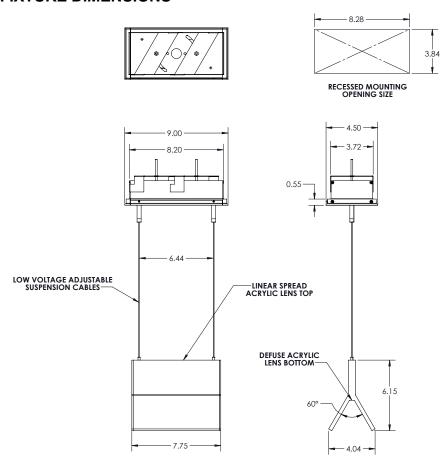

ATHENA NODE PLACEMENT

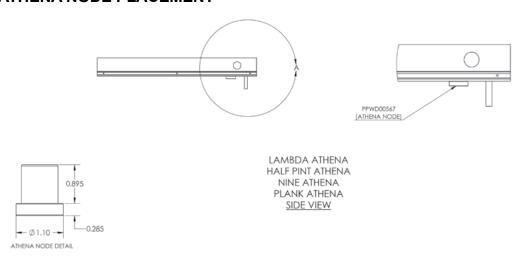

Job Name/Date: Fixture Type Designation:

2 of 3





datasheet

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation:

3 of 3