

MINIVIRTUS IP65

designplan®

datasheet


Minivirtus IP65 is a IP65-rated, wall mounted, bi-emission luminaire made of DurCoral® with a clean, linear design, suitable for outdoor installation. It is available in white light with a wide 120° optic.



TECHNICAL DATA

Wattage / Input	2 x 10W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: DurCoral® Lens: Extra White Frosted Glass
CCT	3000K (2700K, 4000K on request, consult factory)
CRI	>80
BUG Rating	B0-U3-G1
LED Lumens	697 lm per beam (3000K)
Efficacy	69.7 lm/W per beam (3000K)
Optics	120° Wide Beam
Finishes	Unfinished
Fixture Dimensions	4.9" h x 5.7" w x 9.3" l
Fixture Weight	10.4 lbs
IP Rating	IP65

Fixture Dimensions

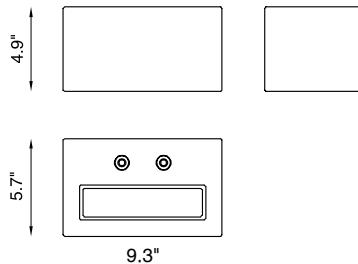

The body is made of DurCoral®, a high-performance "hi-tech" material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

ORDERING INFORMATION

Example: BU3046.DC.US. Accessories / Power Supplies ordered separately.

BU3046	DC	US
Model No.	Finish	
BU3046	DC - DurCoral®	US

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2024 Designplan Lighting, Inc.
Published: January 16, 2026

P: 908-996-7710
F: 908-996-7042
1 of 2

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-3

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



Part Number	Description	Input/Output	# of Fixtures 20W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-3

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: