

MUSE CAPSULE


MUSE is a modular outdoor lamp system that offers multiple lighting solutions based on the needs of the user, by combining one of the 3 emission sources - CAPSULE, STILLA and SPOT - with various installation accessories. MUSE CAPSULE is a cylinder made of anodized aluminum, offered with either single or double light emission, and comes in 3 standard finishes. Dark Sky compliant for output below 80°.

TECHNICAL DATA


Wattage / Input	5W per beam (24VDC)
Power Supply	Remote, not included. See page 4.
Construction	Body: Anodized Turned Aluminum Lens: Polyurethane Opal Resin
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U1-G0 (3000K)
Delivered Lumens	600 lm (3000K) Dark Sky compliant, output below 80°
Efficacy	120 lm/W (3000K)
Optics	Diffuse - Mono or Double Emission
Finishes	Black, Bronze, Aluminum
Fixture Dimensions	Ø1.4" x 5.9"
Fixture Weight	1.32 lbs
IP Rating	IP65
Impact Resistance	IK08



Fixture Dimensions

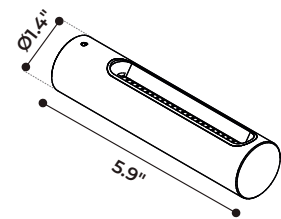

MONO

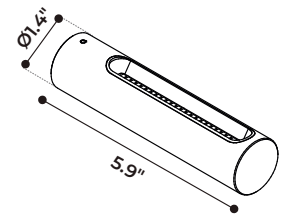

BI

ORDERING INFORMATION


Example: D902010019.US. See page 2 & 3 for support accessories. Power supplies / accessories sold separately.

D9020			US
Model No.	CCT	Color	
D9020	1000 - 3000K/3100K, Single 1001 - 3000K/3100K, Double	9 - Bronze 7 - Black 6 - Aluminum	US


Job Name/Date:

Fixture Type Designation:


SUPPORT ACCESSORIES - See ordering matrix on page 3

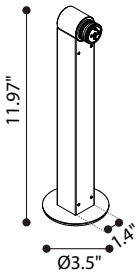


D72007.US
Bollard - 11.8" h - Black

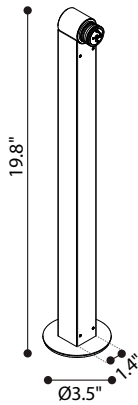


D72017.US
Bollard - 19.7" h - Black

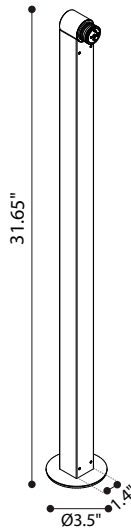


D72027.US
Bollard - 31.5" h - Black




D70037.US
Wall - Black

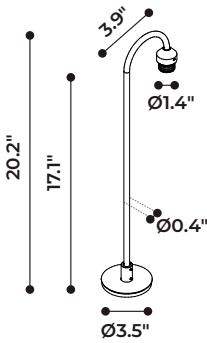


D70067.US
Deco Bend Shape Stem
19.7" h - Black - with Base

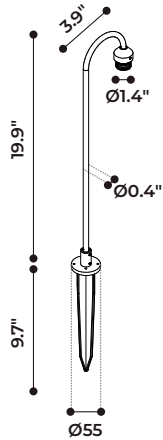

D70087.US
Deco Bend Shape Stem
19.7" h - Black - with Spike

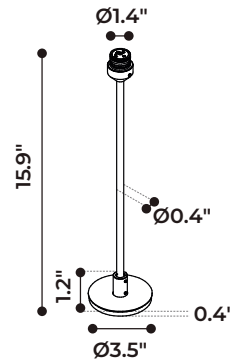

D70107.US
Deco Stem
19.7" h - Black - with Base

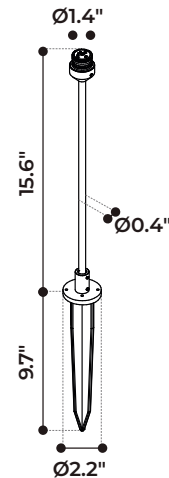

D70127.US
Deco Stem
19.7" h - Black - with Spike

D70077.US
Deco Bend Shape Stem
31.5" h - Black - with Base

D70097.US
Deco Bend Shape Stem
31.5" h - Black - with Spike


D70137.US
Deco Stem
31.5" h - Black - with Spike

More support accessories on page 3

Job Name/Date:

Fixture Type Designation:

SUPPORT ACCESSORIES - See ordering matrix below




D70042.US
Box - Small - *White*

D70043.US
Box - Small - *Sand*

D70045.US
Box - Small - *Aluminum*

D700411.US
Box - Small - *Black*

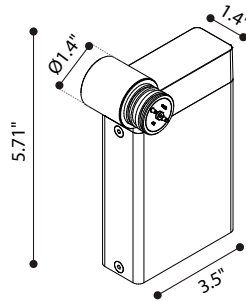

D70052.US
Box - Big - *White*

D70053.US
Box - Big - *Sand*

D700511.US
Box - Big - *Black*

SUPPORT ACCESSORIES ORDERING

		US			US
Model No.	Description		Model No.	Description	
D72007	Bollard - 11.8" h, black	US	D70067	Deco Bend Shape Stem - 19.7" h, w/ base, black	US
D72017	Bollard - 19.7" h, black		D70077	Deco Bend Shape Stem - 31.5" h, w/ base, black	
D72027	Bollard - 31.5" h, black		D70087	Deco Bend Shape Stem - 19.7" h, w/ spike, black	
D70037	Wall - black		D70097	Deco Bend Shape Stem - 31.5" h, w/ spike, black	
D70042	Small Box - white		D70107	Deco Stem - 19.7" h, w/ base, black	
D70043	Small Box - sand		D70127	Deco Stem - 19.7" h, w/ spike, black	
D70045	Small Box - aluminum		D70137	Deco Stem - 31.5" h, w/ spike, black	
D700411	Small Box - black				
D70052	Big Box - white				
D70053	Big Box - sand				
D700511	Big Box - black				

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00689	ELV / TRIAC	120VAC to 24VDC, 10W, Class 2, IP67	1-1
PPLT00680	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 20W, Class 2	1-3
PPLT00690	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 40W, Class 2, IP67	1-6
PPLT00709	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-15
PPLT00543	0-10V Dimming to 1.0%	120-277VAC to 24VDC, 100W, Class 2	1-16


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-6
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-15

For other power supply options consult factory.


PHOTOMETRIC DATA

Maximum Candela = 235.3

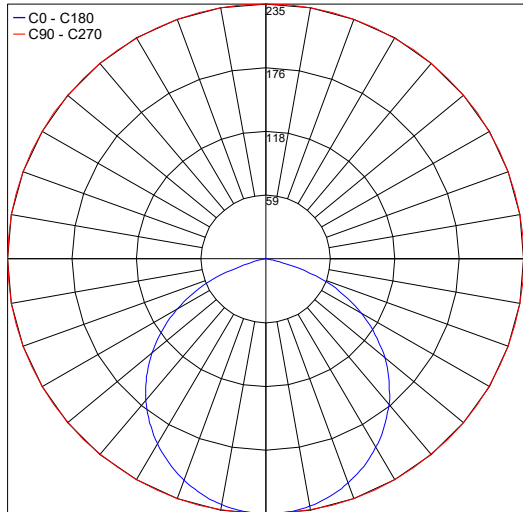

PHOTOMETRIC FILENAME : MUSE-CAPSULE-2700K-MONO-24V.IES

Maximum Candela = 247.7

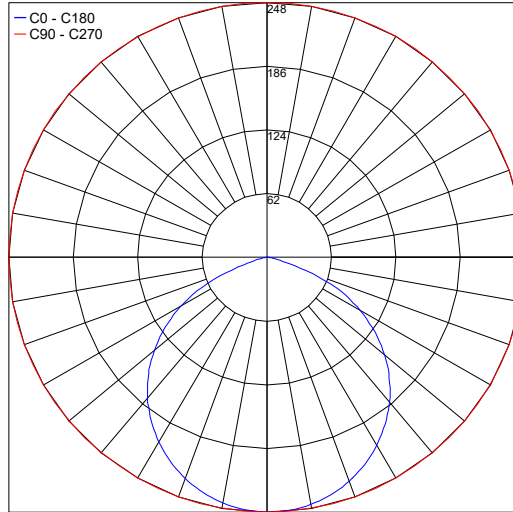

PHOTOMETRIC FILENAME : MUSE-CAPSULE-3000K-MONO-24V.IES

Job Name/Date:

Fixture Type Designation: