


PAVER is an square in-grade uplight that is ideal for accent and pathway lighting. It is available in static white or RGB, is driverover rated up to 11,000 lb, and versatile for indoor or outdoor applications as it can also be used also as a wall mount.



## TECHNICAL DATA

<b>Wattage / Input</b>	4W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Stainless Steel Lens: Sandblasted Extra-clear Glass Cable Length: 4.9' standard
<b>CCT</b>	2700K, 3000K, 4000K, RGB
<b>CRI</b>	>80
<b>Delivered Lumen</b>	Coming Soon
<b>Efficacy</b>	Coming Soon
<b>Optics</b>	Diffused
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	7.9" l x 3.9" w
<b>LED Source</b>	1 Power LED
<b>IP Rating</b>	IP69
<b>IK Rating</b>	IK10
<b>Driveover</b>	11,000 lb capacity

## Fixture Dimensions

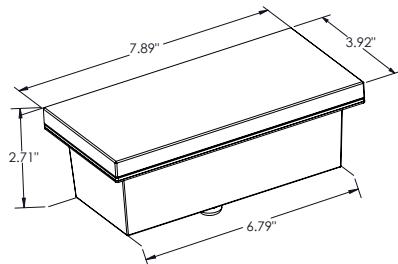

## ORDERING INFORMATION

Example: PAV-L-5-D-V. Required Accessories / Power Supplies ordered separately.

PAV-L		D	V	
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>	<b>Cable Length</b>
PAV-L	F - 2700K 5 - 3000K 9 - 4000K R - RGB	D - Diffused	V - Glass	4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-20
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-20

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-19

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	4W 1-19

For other power supply options consult factory.

## REQUIRED ACCESSORIES - Installation



PPMP03334

Outer Casing - **REQUIRED**

Job Name/Date:

Fixture Type Designation: