

# VIRTUS DIRECT IP65


Virtus Direct IP65 is a wall mounted, single emission luminaire made of DurCoral® with an elegant design, suitable for outdoor installation. It is available in white light with a wide 120° optic.



## TECHNICAL DATA

<b>Wattage / Input</b>	13W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: DurCoral® Lens: Extra White Frosted Glass
<b>CCT</b>	3000K (2700K, 4000K on request, consult factory)
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U4-G1
<b>LED Lumens</b>	Coming Soon
<b>Efficacy</b>	Coming Soon
<b>Optics</b>	120° Wide Beam
<b>Finishes</b>	Unfinished
<b>Fixture Dimensions</b>	13.6" l x 6.9" w x 5.7" h
<b>Fixture Weight</b>	19.0 lbs
<b>IP Rating</b>	IP65

### Fixture Dimensions

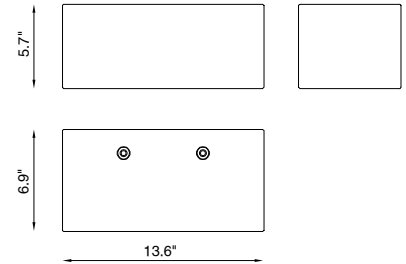

The body is made of DurCoral®, a high-performance “hi-tech” material born from the union of Coral® and cement. It is an aggregate twice as hard as concrete, which allows very high performances in terms of quality, flow and resistance and that, above all, differs from other outdoor materials, for the possibility of being treated with any type of paint and finish. Distinguished by the ability to resist abrasion, insensitive to ultraviolet rays, pollution and atmospheric agents is certainly the ideal material to be placed outdoors.

## ORDERING INFORMATION

Example: BU3068.68.DC.US. Accessories / Power Supplies ordered separately.

BU3068.68	DC	US
<b>Model No.</b>	<b>Finish</b>	
BU3068.68	DC - DurCoral®	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00680</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 20W, Class 2, IP66	1-1
<a href="#">PPLT00690</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 40W, Class 2, IP67	1-2
<a href="#">PPLT00681</a>	Meanwell LPF Non-Dim	120-277VAC to 24VDC, 90W, Class 2, IP67	1-5
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-6

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
<a href="#">PPLT00530</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-2

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: