


Spottino Su Asta is an IP66-rated, small adjustable cylindrical luminaire on a pole that comes with a stake for ground, or square base for fixing to brick. It is available in 2700K or 3000K with multiple finishes.



## TECHNICAL DATA

<b>Wattage</b>	3W
<b>Power Supply</b>	Remote 350mA, not included - see page 2
<b>Construction</b>	Body: Steel, Brass, Aluminum
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	470 lm (3000K)
<b>Efficacy</b>	156.67 lm/W (3000K)
<b>Optics</b>	Narrow
<b>Finishes</b>	Body: Iron Painted, Corten Painted, Bronze Painted, Natural Brass Details: Natural Brass, Burnished Brass
<b>Fixture Dimensions</b>	Head: Ø1.18" x 3.94" l Pole: 23.62" (7.87" end to stake)
<b>IP Rating</b>	IP66

Fixture Dimensions

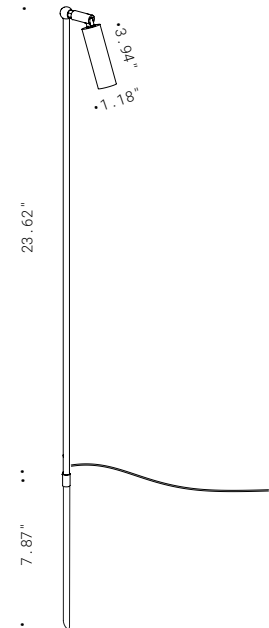

## ORDERING INFORMATION

Example: R30.032.35.ON.ON.27.US. Power supplies sold separately.

R30.032	35				US
Model No.	Power Supply	Body Finish	Detail Finish	CCT	
R30.032	35 - 350mA <i>Power supply is remote and is sold separately</i>	7 - Iron painted 9 - Corten Painted 12 - Bronze Painted ON - Natural Brass	ONB - Burnished Brass ON - Natural Brass <i>If choosing Natural Brass body, must use Natural Brass detail, and vice-versa</i>	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00138</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-2
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-6
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-9
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-13
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	8-11
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-56

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	4-4
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	6-9
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	12-13

For other power supply options consult factory.

## PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: