


Spottino Su Asta is an IP66-rated, small adjustable cylindrical luminaire on a pole that comes with a stake for ground, or square base for fixing to brick. It is available in 2700K or 3000K with multiple finishes.



## TECHNICAL DATA

|                           |                                                                                                              |
|---------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Wattage</b>            | 3W                                                                                                           |
| <b>Power Supply</b>       | Remote 350mA, not included - see page 2                                                                      |
| <b>Construction</b>       | Body: Steel, Brass, Aluminum                                                                                 |
| <b>CCT</b>                | 2700K, 3000K                                                                                                 |
| <b>CRI</b>                | >80                                                                                                          |
| <b>Delivered Lumens</b>   | 470 lm (3000K)                                                                                               |
| <b>Efficacy</b>           | 156.67 lm/W (3000K)                                                                                          |
| <b>Optics</b>             | Narrow                                                                                                       |
| <b>Finishes</b>           | Body: Iron Painted, Corten Painted, Bronze Painted, Natural Brass<br>Details: Natural Brass, Burnished Brass |
| <b>Fixture Dimensions</b> | Head: Ø1.18" x 3.94" l<br>Pole: 23.62" (7.87" end to stake)                                                  |
| <b>IP Rating</b>          | IP66                                                                                                         |

Fixture Dimensions

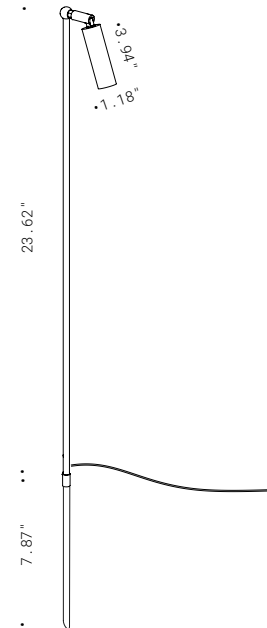

## ORDERING INFORMATION

Example: R30.032.35.ON.ON.27.US. Power supplies sold separately.

| R30.032   | 35                                                                 |                                                                                     |                                                                                                                                     |                          | US |
|-----------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----|
| Model No. | Power Supply                                                       | Body Finish                                                                         | Detail Finish                                                                                                                       | CCT                      |    |
| R30.032   | 35 - 350mA<br><i>Power supply is remote and is sold separately</i> | 7 - Iron painted<br>9 - Corten Painted<br>12 - Bronze Painted<br>ON - Natural Brass | ONB - Burnished Brass<br>ON - Natural Brass<br><i>If choosing Natural Brass body, must use Natural Brass detail, and vice-versa</i> | 27 - 2700K<br>30 - 3000K | US |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

| Part Number                 | Description                                        | Input/Output                            | # of Fixtures |
|-----------------------------|----------------------------------------------------|-----------------------------------------|---------------|
| <a href="#">PPLT00138</a>   | 0-10V Dimming to 10%                               | 120-277VAC to 350mA, 4W, Class 2        | 2-2           |
| <a href="#">PPLT00466-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 10W, Class 2, DAMP | 1-6           |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only)                              | 120VAC to 350mA, 14W, Class 2           | 4-9           |
| <a href="#">PPLT00263</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2       | 8-11          |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 100W, Class 2      | 2-14          |

## Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00247</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 7W, Class 2  | 4-4           |
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 6-9           |
| <a href="#">PPLT00179</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 12-13         |

*For other power supply options consult factory.*

## PHOTOMETRIC DATA

*Coming Soon**Job Name/Date:**Fixture Type Designation:*