

SPOTTINO SU ASTA


Spottino Su Asta is an IP65-rated, small adjustable cylindrical luminaire on a pole that comes with a stake for ground, or square base for fixing to brick. It is available in 2700K with a galvanized iron finish.



TECHNICAL DATA

Wattage	3W
Power Supply	Remote 350mA, not included - see page 2
Construction	Body: Iron, Aluminum
CCT	2700K
Delivered Lumens	420 lm
Efficacy	140 lm/W
Optics	
Finishes	Galvanized Iron
Fixture Dimensions	Head: Ø1.18" x 3.94" Pole: 23.62" (7.87" end to stake)
IP Rating	IP65

Fixture Dimensions

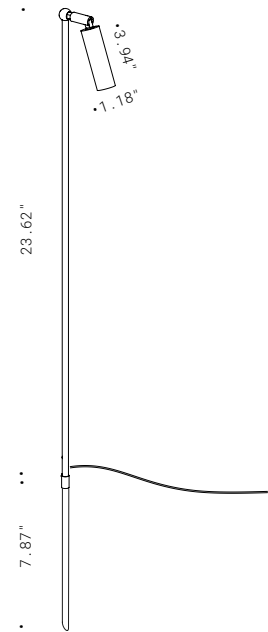

ORDERING INFORMATION

Example: RART.30.032.US. Power supplies sold separately.

RART.730.032	.US
Model No.	
RART.730.032	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-2
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-6
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-9
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-13
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	8-11
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-56

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	4-4
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	6-9
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	12-13

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: