



X2

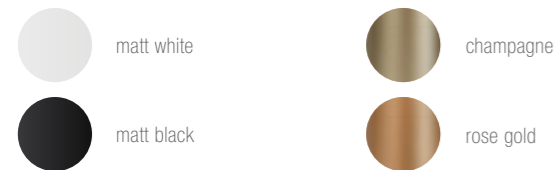

A double projector for a light which perfectly mingles with the space it is installed in: X2, an indoor luminaire installable on ceilings or walls, is available with white, black or rose gold or champagne finishings and interchangeable lens. X2 is a punctual, definite and performing light. The high-performance projectors of minimal design are conceived for having the lowest visual effect and provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically, allowing a wide range of luminescent settings.

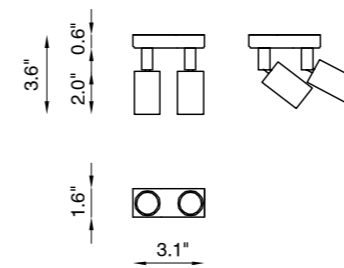

A

CODE COMPOSITION

BU1202_2 S _ E _ WD

<i>light color</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
22	22°
50	50°
<i>finishing</i>	
WH	white
BL	black
A1	champagne
A2	rose gold

example of code composition BU1202 WH 2 S 22 E 30 WD

TECHNICAL FEATURES

Code	BU1202 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	1.3 lbs
Mounting	Wall and ceiling
IP rating	IP40
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 2 x 11 VDC
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 champagne and rose gold.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042



X2 (fig. A)
Private Villa - Austria



X2 (fig. B)
SUPERFUTUREDESIGN*

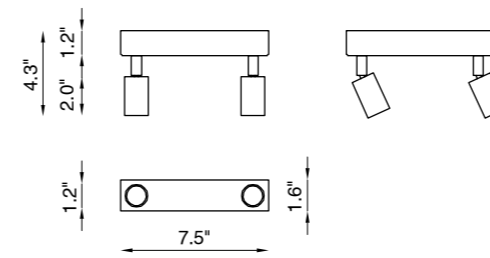

B

CODE COMPOSITION

BU1201 2 S E ND

light color

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
A1	champagne
A2	rose gold

example of code composition BU1201 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	BU1201 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	1.3 lbs
Mounting	Wall and ceiling
IP rating	IP40
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Voltage connection	XXX - 50/60Hz
CRI	>90
Emergency	On request
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 champagne and rose gold.