


Y1 is a cylindrical indoor floodlight suitable for installation on walls or ceilings. It has a 360° adjustable arm system with invisible joints. Available in 22° or 50° optics with 4 standard finishes.



TECHNICAL DATA

Wattage / Input	8W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
BUG Rating	B1-U1-G0 (22°, 3000K) B1-U0-G0 (50°, 3000K)
Delivered Lumens	411 lm (22°, 3000K) 260 lm (50°, 3000K)
Efficacy	51.4 lm/W (22°, 3000K) 32.5 lm/W (50°, 3000K)
Optics	22°, 50°
Finishes	White, Black, Chrome, Brass
Fixture Dimensions	Ø1.2" x 4.3" I - Mount. Box 1.6" x 0.6" (Remote)
Fixture Weight	0.88 lbs
IP Rating	IP40

Fixture Dimensions



ORDERING INFORMATION

Example: BU1112.BL.4S.22.E.30.WD.US. Power Supplies ordered separately.

BU1112	.		.	4S	.		.	E	.		.	WD	.	US
Model No.		Finish		4S		Optics		E		CCT		Power		US
BU1112 - Remote		WH - White BL - Black CP - Chrome BR - Brass		4S - Surface		22 - 22° 50 - 50°		E		27 - 2700K 30 - 3000K 40 - 4000K		WD - Remote		US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 10W, Class 2, DAMP	1-1
PPLT00470	Phase Dim (120V only)	120VAC to 700mA, 14W, Class 2	1-1
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	3-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00635	PEQE	PEQE	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120/277VAC to 700mA, 20W, Class 2	2-2
PPLT00673	PEQE	PEQE	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120-277VAC to 700mA, 20W, Class 2	2-2
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W, Class 2	2-3

For other power supply options consult factory.

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 1704.5

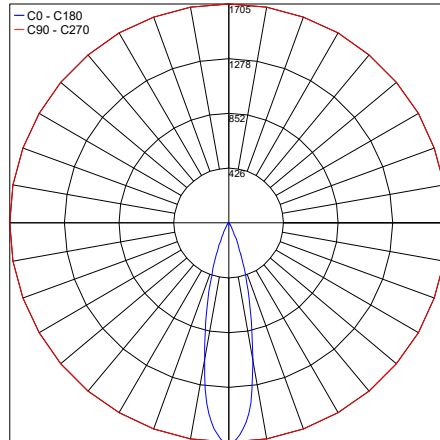

PHOTOMETRIC FILENAME : Y1 22° - BU1111BL4S22E30ND.JES

Maximum Candela = 761.3

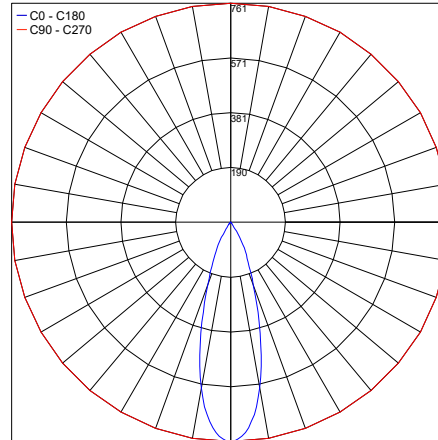

PHOTOMETRIC FILENAME : Y1 50° - BU1111BL4S50E30ND.JES

Job Name/Date:

Fixture Type Designation: