


Colonna is 3.28 foot rechargeable battery lamp made of steel with a warm white light. It comes in painted iron or painted bronze finish and is IP66-rated for outdoor use.



TECHNICAL DATA

Wattage / Input	3W (350mA)
Power Supply	Remote, not included. See page 2.
Battery Life	10 hours - 7 hours at maximum brightness
Light Source	Glass on demand
Construction	Body: Steel
CCT	2700K, 3000K
CRI	>80
Delivered Lumens	470 lm (3000K)
Efficacy	156.67 lm/W (3000K)
Optics	Narrow
Finishes	Iron Painted, Bronze Painted
Fixture Dimensions	7.87" x 7.87" x H 39.37"
IP Rating	IP66

Fixture Dimensions

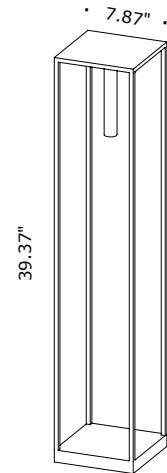

ORDERING INFORMATION

Example: R30.033.7.27.US. Power supplies sold separately

R30.033	.		.		.	US
Model No.	Finish	CCT				
R30.033	7 - Iron Painted	27 - 2700K	US			
	12 - Bronze Painted	30 - 3000K				

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00130	Non-Dim	120-277VAC to 350mA, 3W	1-1
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-3
PPLT00495	Phase Dim (120V only)	120VAC to 350mA, 25W, IP66	3-8
PPLT00263	Leading/Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-5
PPLT00538-P	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 350mA, 100W, Class 2	1-24

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-2
PPLT00459	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-2
PPLT00460	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-4
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-4
PPLT00562	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 17.5W, Class 2	3-5
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-6
PPLT00458	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-6

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Job Name/Date:

Fixture Type Designation: