


ELK is a sturdy, concrete LED fixture that comes as a bollard or wall mounted design, suitable for outdoor installation using an effective ground or wall fixing system. It is available in 3 color temperatures, an anthracite or natural concrete finish and mono light emission. Also available as a wall mount. Dark Sky compliant for output below 80°.

## TECHNICAL DATA

|                           |                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------|
| <b>Wattage</b>            | 5.5W                                                                                        |
| <b>Power Supply</b>       | Remote 500mA, not included. See page 2.                                                     |
| <b>Construction</b>       | Body: Portland Concrete<br>Fixing Base: Stainless Steel<br>Lens: Extra Clear Tempered Glass |
| <b>CCT</b>                | 2700K, 3000K, 4000K                                                                         |
| <b>BUG Rating</b>         | B0-U2-G0 (3000K)                                                                            |
| <b>CRI</b>                | >80                                                                                         |
| <b>Delivered Lumens</b>   | 190 lm (3000K)<br>Dark Sky compliant, output below 80°                                      |
| <b>Efficacy</b>           | 34.5 lm/W                                                                                   |
| <b>Optics</b>             | Diffuse                                                                                     |
| <b>Finishes</b>           | Natural or Anthracite Concrete                                                              |
| <b>Lumen Maintenance</b>  | 40,000 hrs (Ta 35°C)                                                                        |
| <b>Fixture Dimensions</b> | 5.57" x 4.53" x 15.98" or 34.65" h                                                          |
| <b>IP Rating</b>          | IP66                                                                                        |
| <b>Impact Resistance</b>  | IK08                                                                                        |



Fixture Dimensions

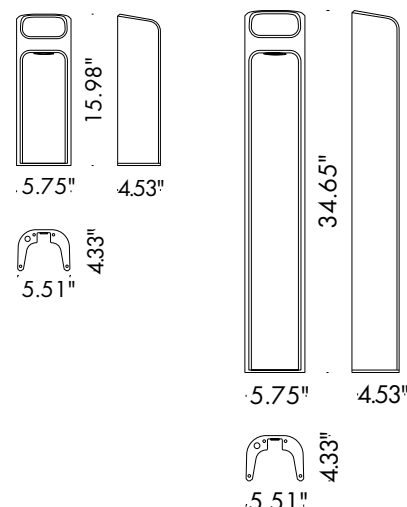

## ORDERING INFORMATION

Example: F61501.B.3.64.US. Power Supplies ordered separately.

|                              |                         |            |                           |     |
|------------------------------|-------------------------|------------|---------------------------|-----|
|                              |                         |            | 64                        | .US |
| <b>Model No.</b>             | <b>Finish</b>           | <b>CCT</b> | <b>Optics</b>             |     |
| F61501 - Bollard 400 (15.8") | A - Natural Concrete    | 2 - 2700K  | 64 - Monoemission Diffuse | .US |
| F61502 - Bollard 900 (35.4") | B - Anthracite Concrete | 3 - 3000K  |                           |     |
|                              |                         | 4 - 4000K  |                           |     |

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

500mA


| Part Number                 | Description                                         | Input/Output                            | # of Fixtures |
|-----------------------------|-----------------------------------------------------|-----------------------------------------|---------------|
| <a href="#">PPLT00466-P</a> | 0-10V Dimming (to 1.0%)                             | 120VAC to 500mA, 10W, Class 2, DAMP     | 1-2           |
| <a href="#">PPLT00497</a>   | Phase Dim (120V only)                               | 120VAC to 500mA, 12W, Class 2, DAMP     | 1-3           |
| <a href="#">PPLT00262</a>   | Leading / Trailing Edge Dimmable to 10% (120V only) | 120-277VAC to 500mA, 32W, Class 2       | 4-7           |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1%                               | 120-277VAC to 500mA, 50W, Class 2, DAMP | 1-8           |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1%                               | 120-277VAC to 500mA, 100W, Class 2      | 1-8           |

**Suggested Lutron Compatible**

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                            | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|--------------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00259</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver         | 120-277VAC to 500mA, 10W, Class 2 | 2-2           |
| <a href="#">PPLT00195</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver         | 120-277VAC to 500mA, 19W, Class 2 | 3-4           |
| <a href="#">PPLT00676</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ Premier 0.1% EcoSystem™ (0.1% Dim) LED Driver | 120-277VAC to 500mA, 20W, Class 2 | 2-5           |
| <a href="#">PPLT00180</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver         | 120-277VAC to 500mA, 27W, Class 2 | 5-6           |


**PHOTOMETRIC DATA***Note all Photometry is 3000K*

Maximum Candela = 164.8

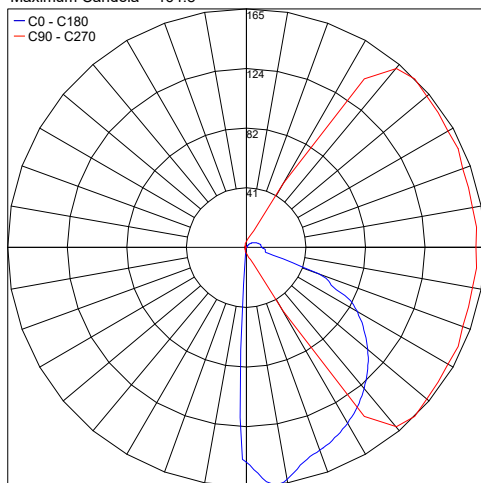

PHOTOMETRIC FILENAME : ELK BOLLARD 400 - 61501.X.3.05.IES

Maximum Candela = 164.8

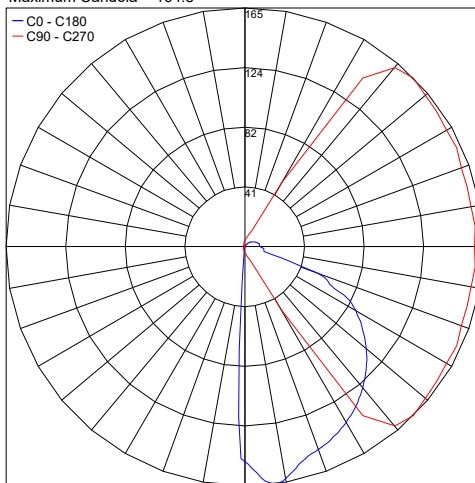

PHOTOMETRIC FILENAME : ELK BOLLARD 900 - 61502.X.3.05.IES

Job Name/Date:

Fixture Type Designation: