


Fiaccola is an outdoor LED luminaire on a 71" pole, made of galvanized iron, that is suitable for installation in the ground using the stem base of the pole. It comes in 2700K with a matte painted iron finish.



## TECHNICAL DATA

<b>Wattage / Input</b>	1W
<b>Power Supply</b>	Remote 350mA, not included. See page 2.
<b>Construction</b>	Body: Galvanized Iron Lens: Decorative Glass
<b>CCT</b>	2700K
<b>Delivered Lumens</b>	140 lm
<b>Efficacy</b>	140 lm/W
<b>Optics</b>	—
<b>Finishes</b>	Matte Iron Painted
<b>Fixture Dimensions</b>	70.87" h x 7.87" underground
<b>IP Rating</b>	IP65

Fixture Dimensions

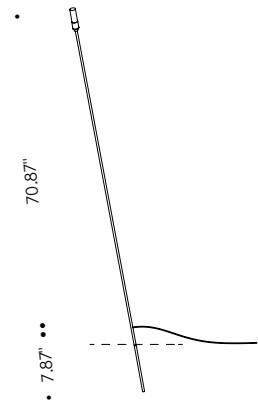

## ORDERING INFORMATION

Example: R70.084.US.

R70.084	.US
<b>Model No.</b>	
R70.084	.US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00138</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-2
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	4-8
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	3-7
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-13
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	8-11
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-56

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	4-4
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	6-9
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19wW, Class 2	12-13

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: