

# HOKU D-50


Hoku is an outdoor, adjustable on-grade or floodlight made of stainless steel that can be installed on the floor, wall, or ceiling. It consists of a cylinder with parallel lines creating a pattern on the surface, that rotates 360° in the housing base. It is available in 3 standard Hard Coat Treatment finishes. Hoku D-50 is the Ø4.7" x 4.7" version.



## TECHNICAL DATA

<b>Wattage</b>	3W LED or GU4 (Lamp by Others)
<b>Power Supply</b>	Remote 350mA not included, see page 2
<b>Dimming</b>	Determined by Lamp
<b>Construction</b>	Body: AISI 316L Stainless Steel
<b>CCT</b>	2700K, 3000K
<b>BUG Rating</b>	B1-U1-G0 (6°, 10°x35°, 15°, 25°) B0-U1-G0 (35°)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	550 lm (3000K)
<b>Efficacy</b>	110 lm/W (3000K)
<b>Optics</b>	Multilens: 6°, 15°, 25°, 38°, 10°x 35°, Wide
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	Ø4.7" x 4.7"
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components

## Fixture Dimensions



## FINISHES



Inox Natural



Inox Graphite



Inox Bronze

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT5025040B.US. Power Supplies ordered separately.

		.US
<b>Model No.</b>	<b>Finishes</b>	
SPT5025040 - GU4 Bulb by Others	N - Inox Natural	.US
SPT5025020 - LED 2700K	G - Inox Graphite	
SPT5025030 - LED 3000K	B - Inox Bronze	

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	1-2
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-3
<a href="#">PPLT00263</a>	Leading / Trailing Edge Phase Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-3
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4


## Suggested Lutron Compatible 350mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4

For other power supply options consult factory.

## PHOTOMETRIC DATA

Multilens includes the below optics at 2700K

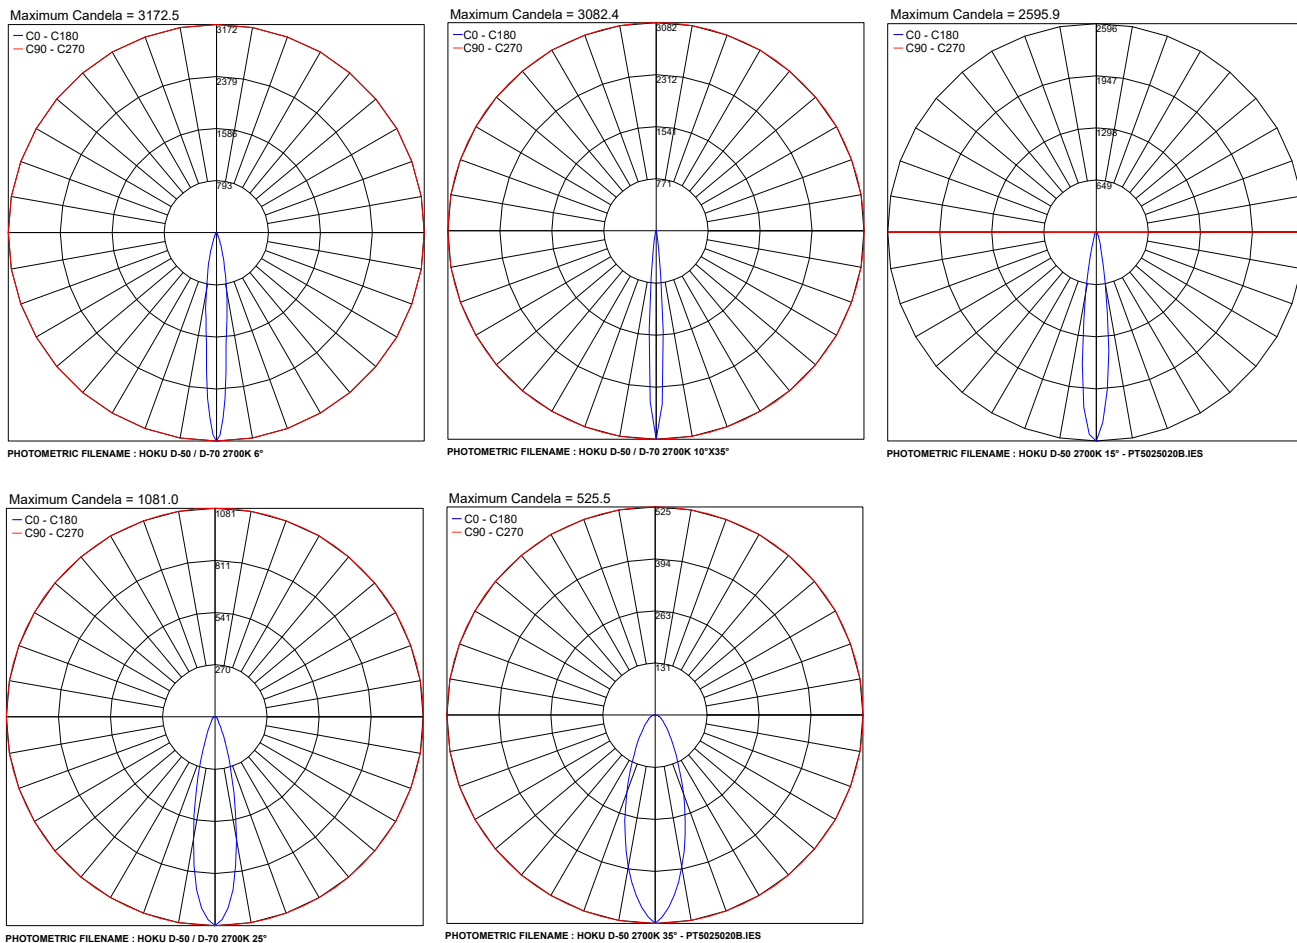

Job Name/Date:

Fixture Type Designation: