


NOVA

Designed by G. M. Scutellà

Never-ending
perspectives

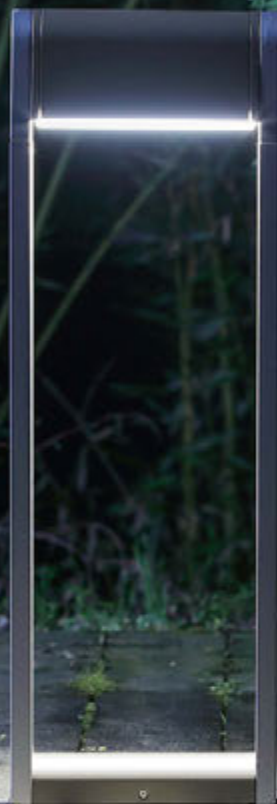

FRANCESCONI
ARCHITECTURAL LIGHT

designplan® 

Why NOVA?

Design and functionality, indoor and outdoor, ambience and performance. Nova is a new generation of lamps for contemporary living. Architecturally inspired by the arch shape, Nova is a lighting technology that comes in different lengths, sizes and types. Nova allows multiple applications, in order to light-up any space with stylistic coherence.

Nova. A new era begins.

Filippo Badinelli
CEO Francesconi Architectural Light

ABOUT THE COLLECTION

Nova offers versatile outdoor lighting for all residential needs, from the bollard version to wall lights, for a complete, dynamic, truly innovative and one-of-a-kind project.



Wall



Wall / Inground recessed



Floodlight



Bollard



Pole mounted



COLOR BOOST
LUMEN 3



DALI2



IP 66 - 67



IK 08 - 10



MIDPOWER



POWERLED




T -20/+50°C



85 - 115 lm/Watt


* on request




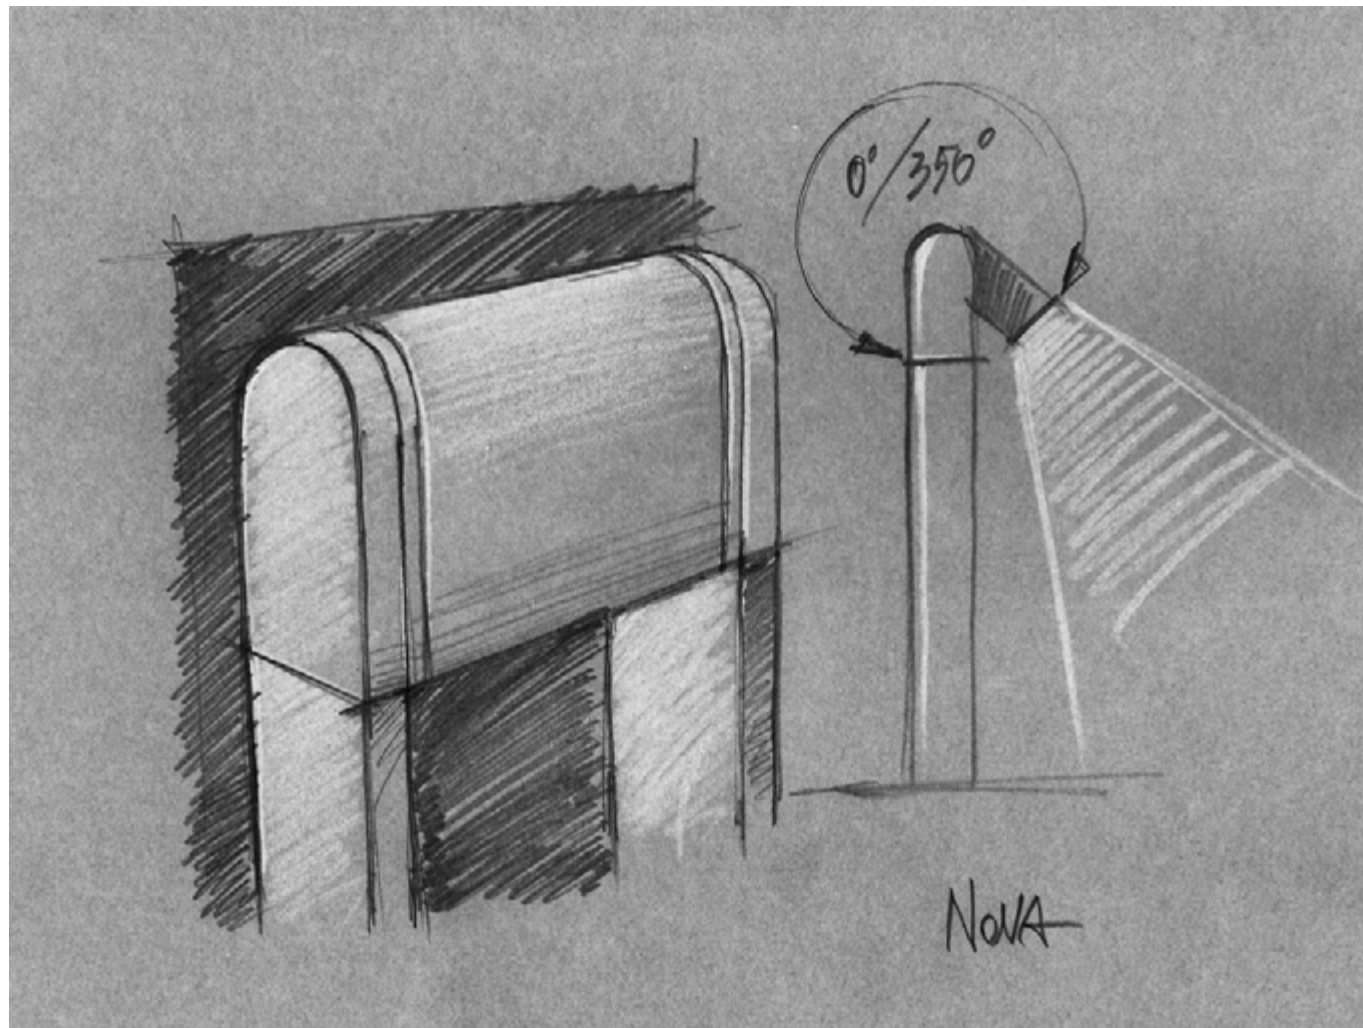

“Light is movement, flexibility. Nova was born from the idea that light can tell a different and unique story in each and every environment. A flexible, naturally smart light in a world of still elements”.

G. M. Scutellà
Designer

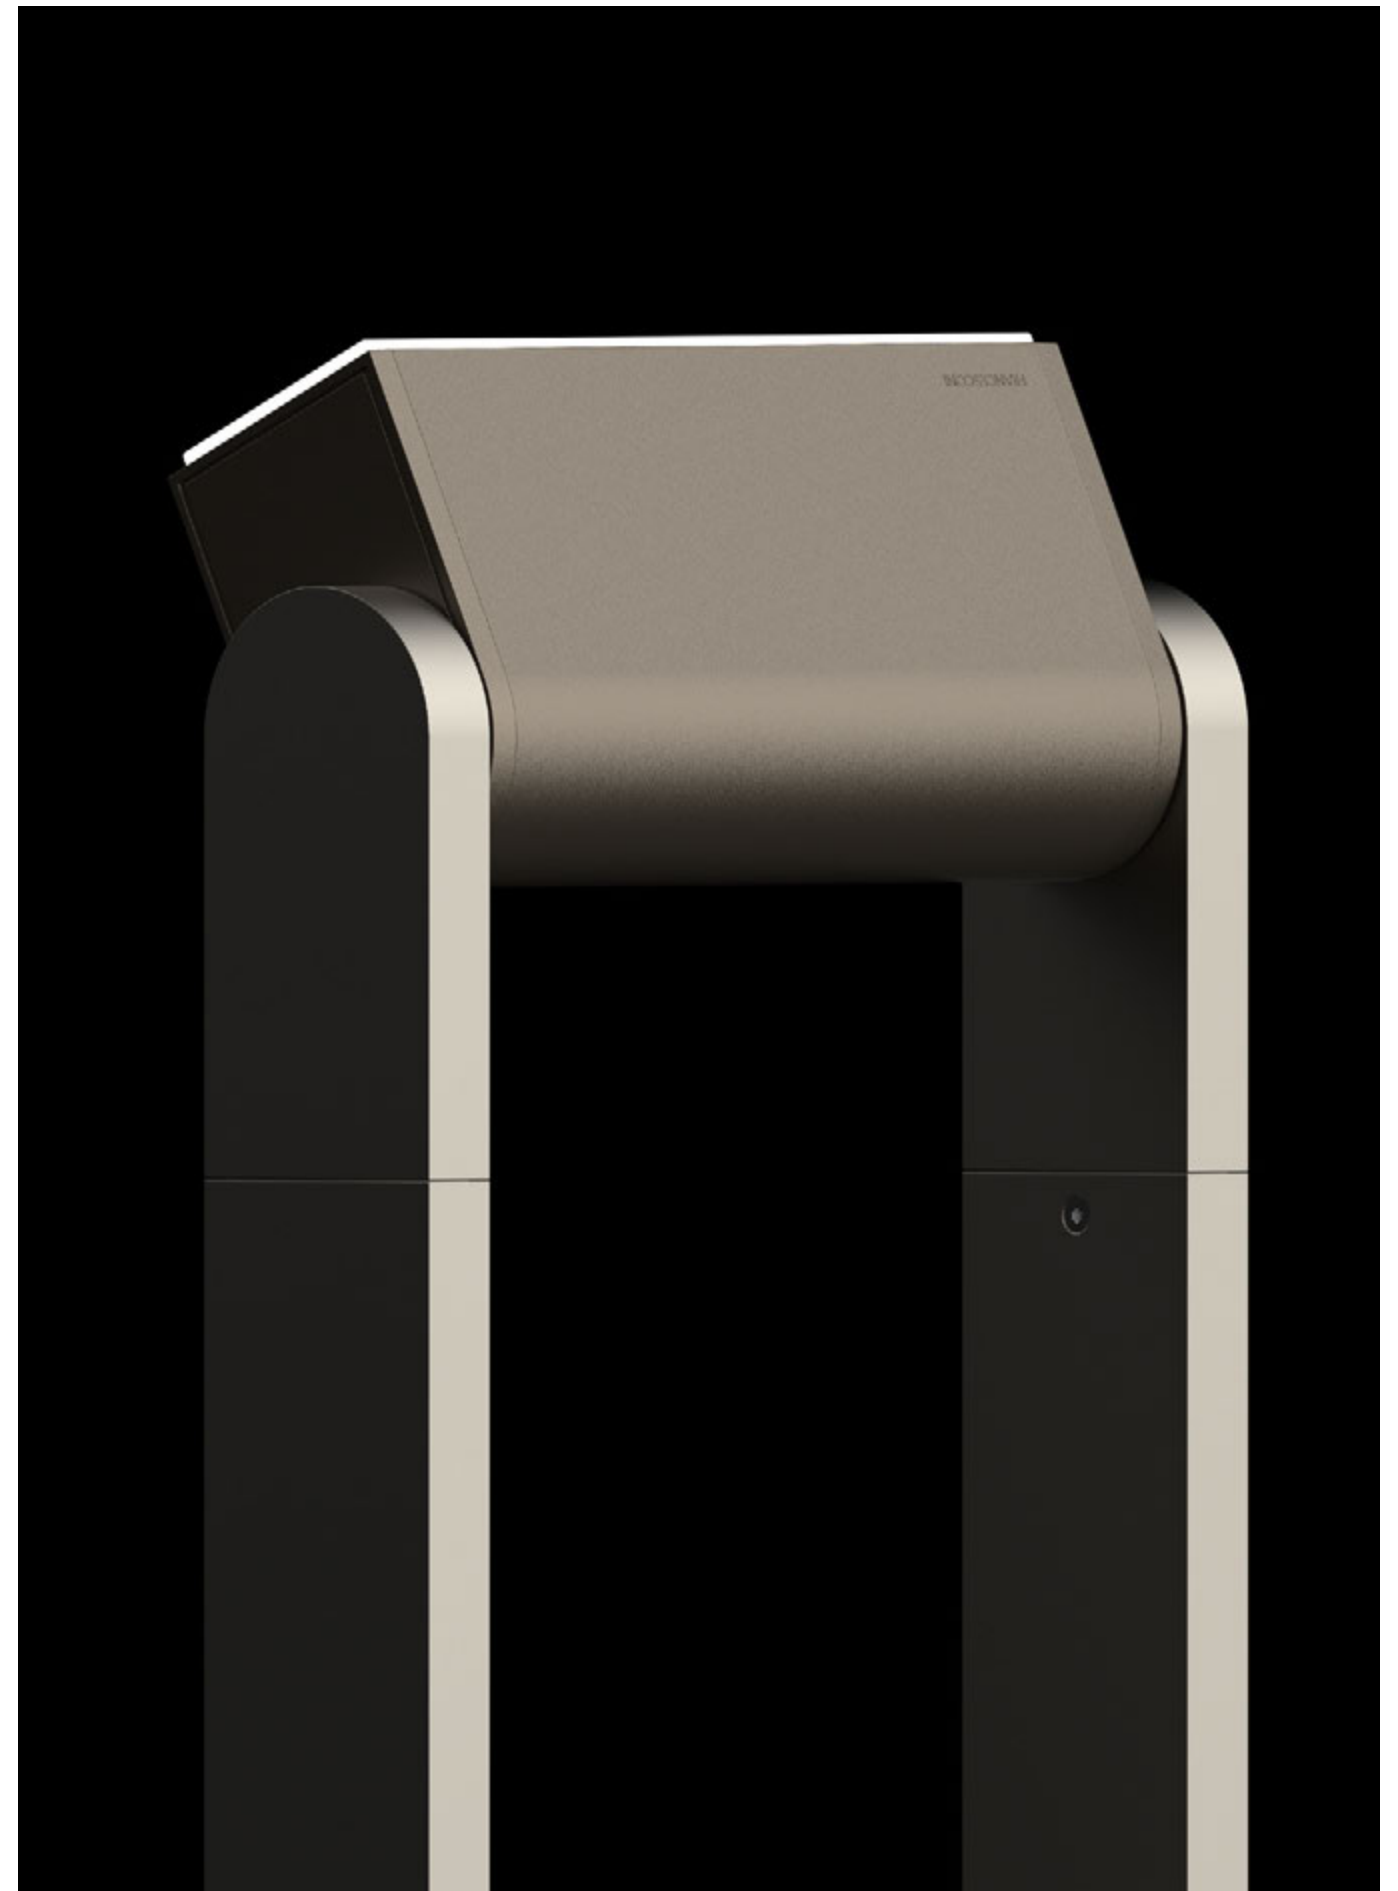

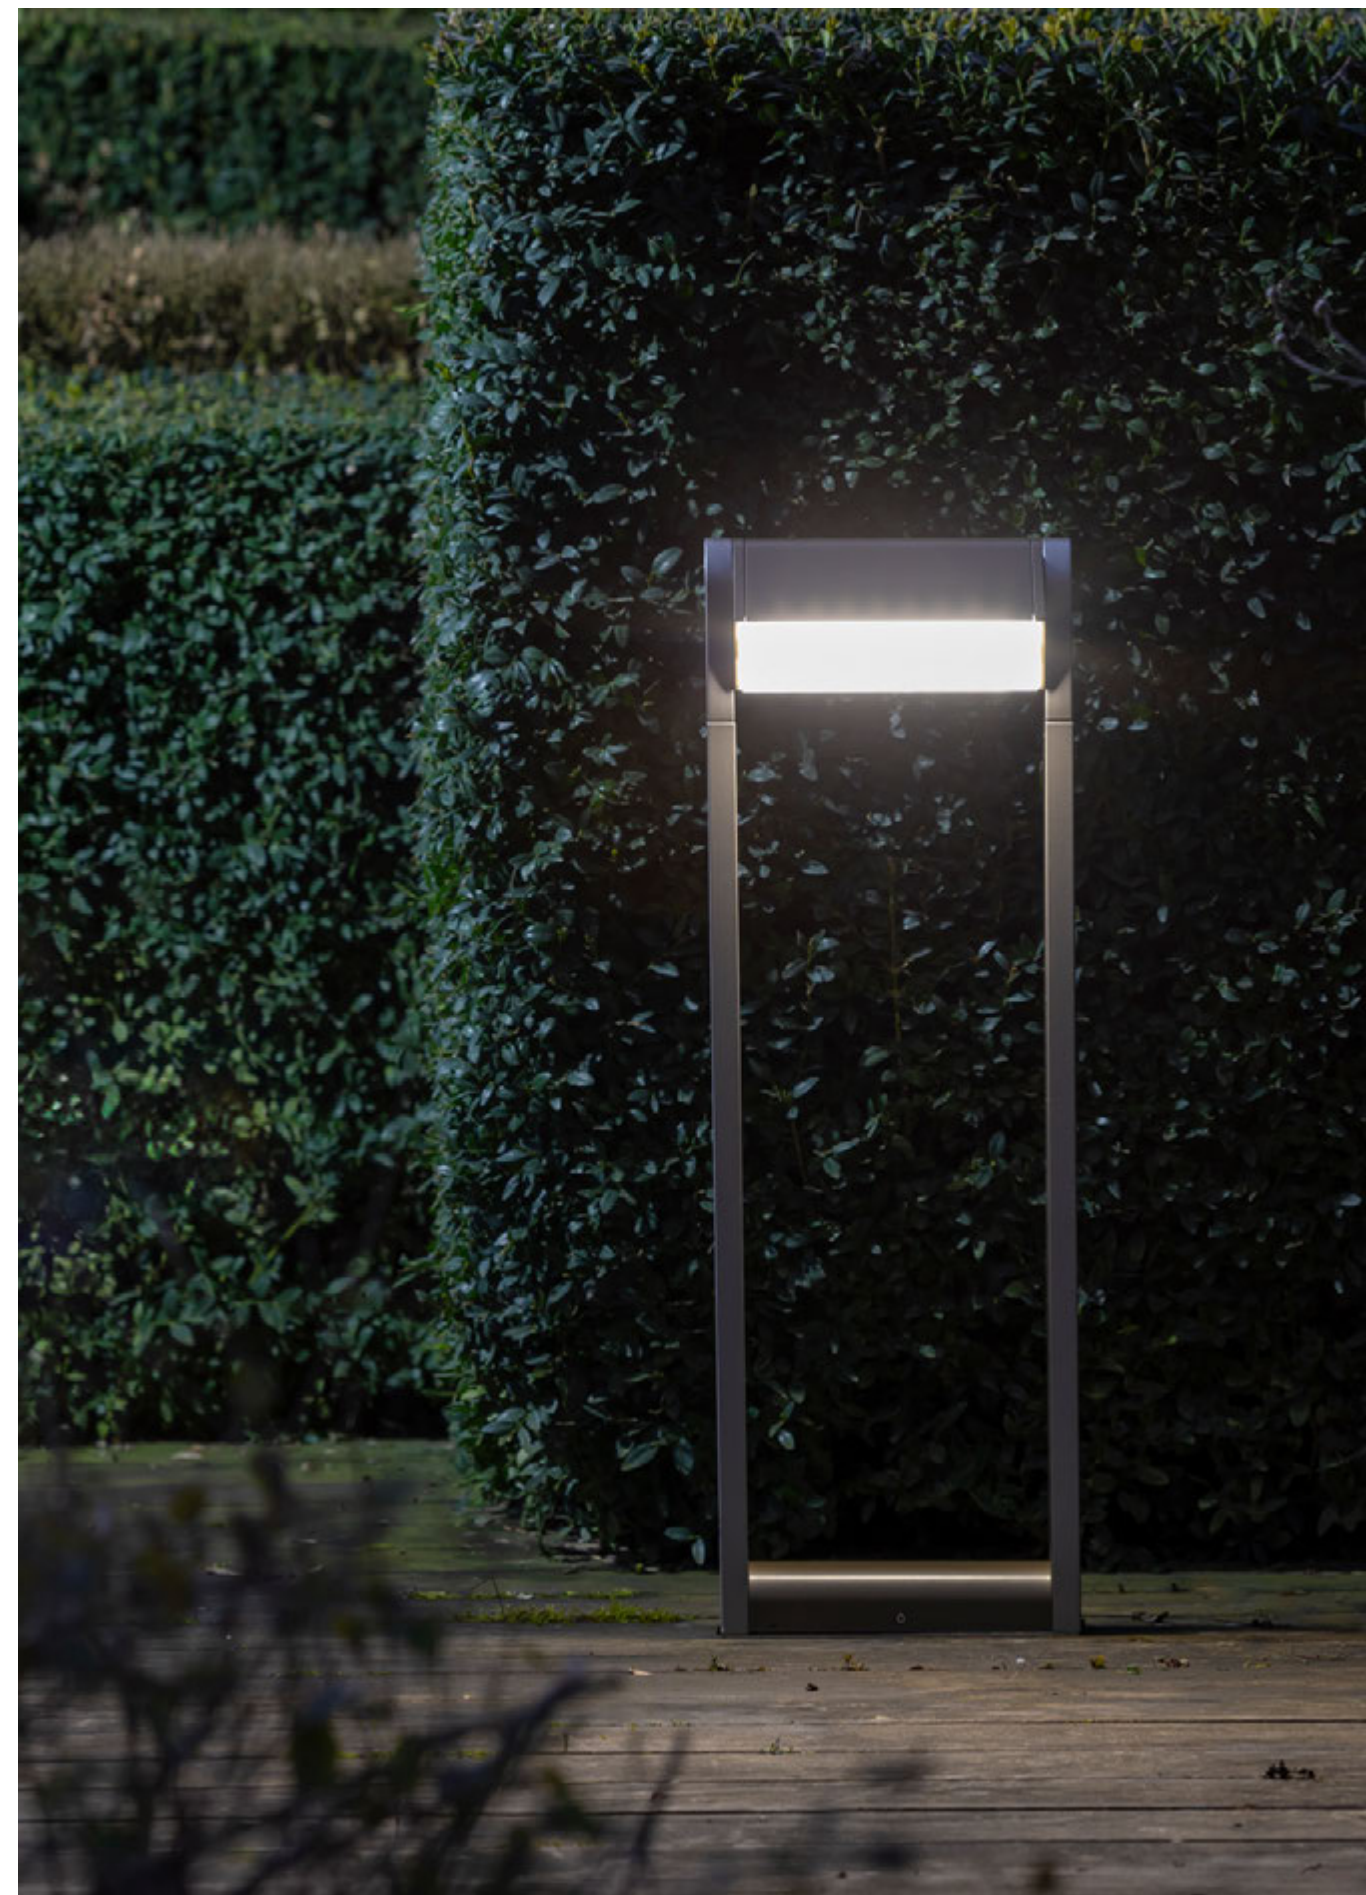

Minimal style to fit to every environment.

Nova is the most versatile solution to give light and design to every context of living, both indoor and outdoor. From a historic building to contemporary architecture, its minimal style fits into any environment.

10





Pure elegance with hidden cables and screws.

Nova keeps a secret. A spotlight without any visible cable or screw, with a minimal joint that hides a clever technical and aesthetic work. All aimed at achieving the charm of a pure and elegant design in an extremely solid structure.

14




Beauty is nothing without power.



16


Nova combines unique aesthetic features with a high-performance engineering content. Two different models: MidPower, with lenses for diffused effects and Power Led, with lenses for concentrated and defined effects. The latter ones are also used for RGB + W versions with DMX/RDM.

LIGHT BEAMS

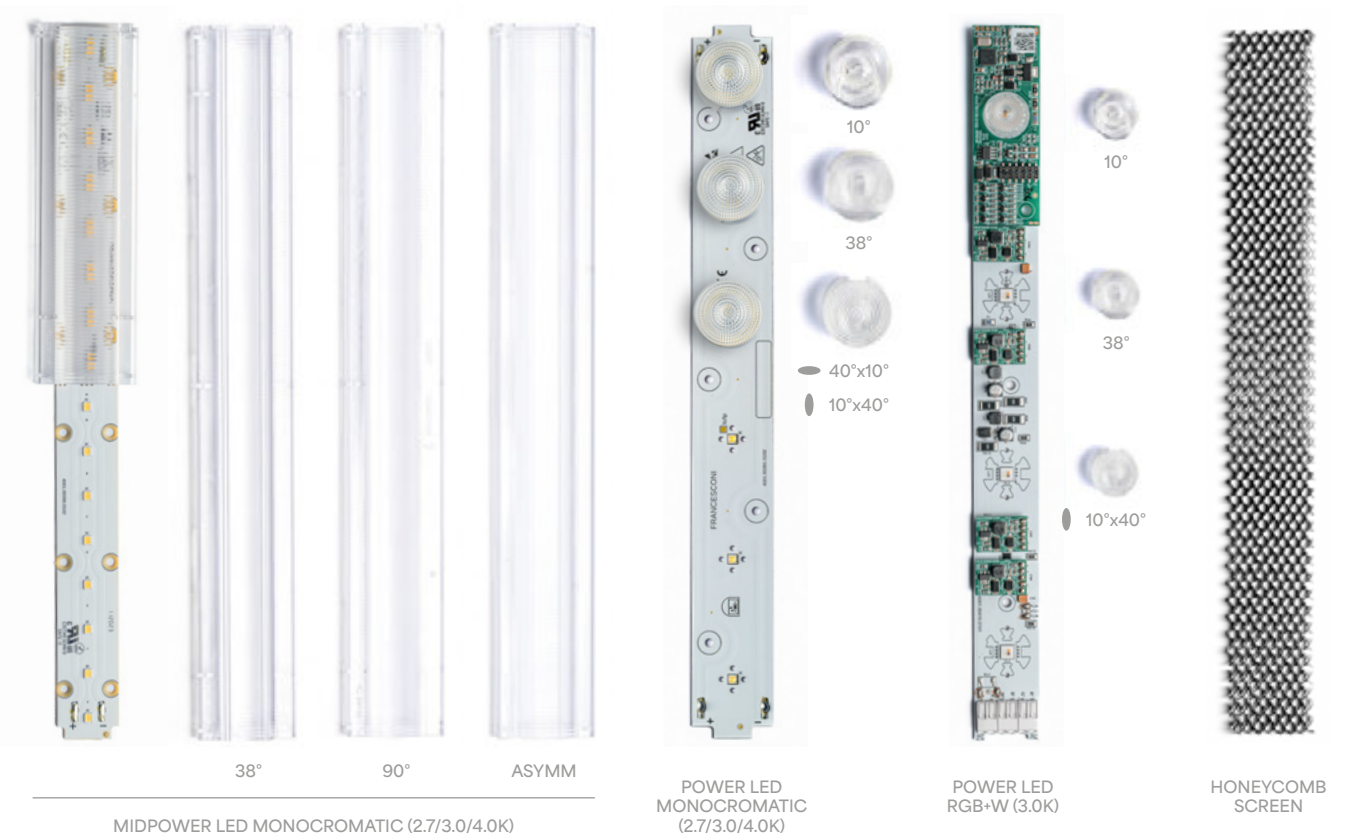

17

PROTECTION FOR HUMIDITY

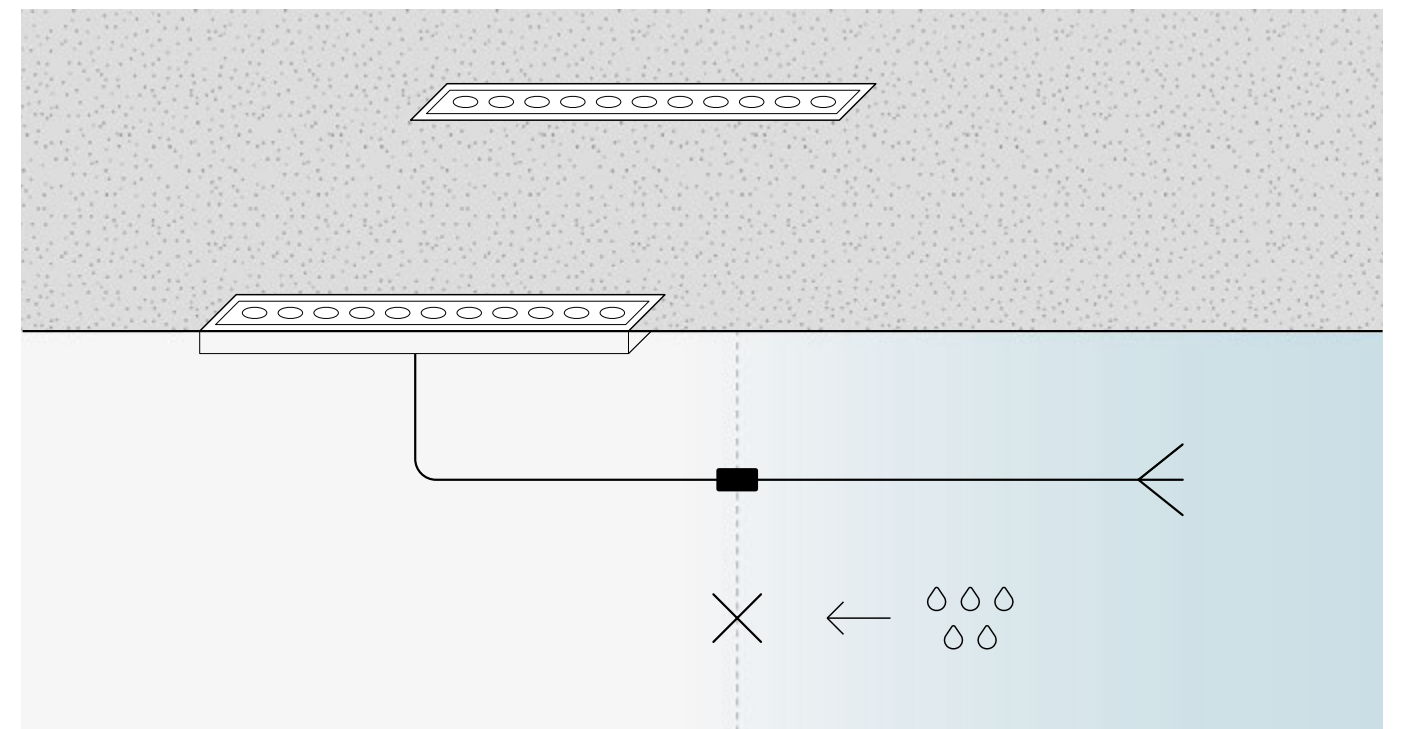






An up to 3 times more efficient color.

COLOR BOOST is the new optimization algorithm that - by making the most of a product's power - enables you to obtain an up-to-3-times-higher light output that varies depending on the color. Moreover, even at the same power, the COLOR BOOST product is up to 3 times smaller than standard products, thus reducing the overall cost of the project.

Get to know the COLOR BOOST.

PERFORMANCE

Each color can be given 100% power, compared to other products on the market that only use 25%. This allows to get an up-to-3-times higher light output.

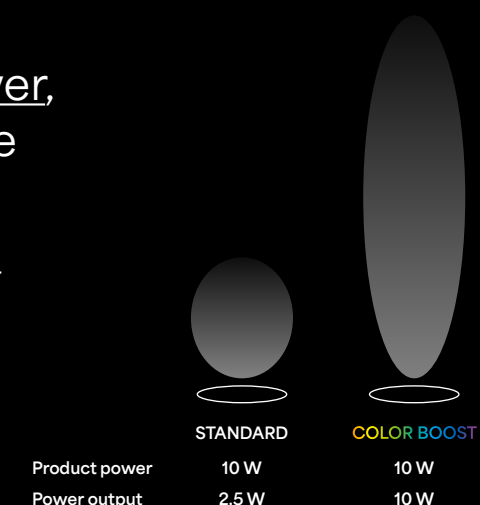

AESTHETICS

Products up-to-3-times more compact than market standards, with the same power output. This means a considerable reduction of the visual impact on your architecture.



* For more information, visit the COLOR BOOST section on our website.



NOVA Collection

Registered Community Design

6060T5 aluminum housing.
High resistance double painting process
(in compliance with UNI ISO9227:2012).
A4 stainless steel sealing allen screws.
Extra clear tempered glass screen.
Silicon gasket.
Single cable input, pre-assembled
with neoprene cable. Double imput for
RGB+W or DALI version.
In compliance with EN60598-1 and
related annexes.
Test operating temperature ranges
between - 20°C and +50°C.

Fixed applique

Transparent glass 5mm-thick. Aluminum 6060T5 fixing base.
Quick water stop connector IP68 pre-mounted on the cable.

Adjustable applique

Transparent glass 5mm-thick. Stainless steel 430 fixing base.
Quick water stop connector IP68 pre-mounted on the cable.

Recessed - Trimless

Transparent glass 5mm-thick. Stainless steel 430 recessed
box. Resin cable joints IP68 made on the power cord.

Adjustable bollard

Sand blasted tempered glass screen with 8mm-thick.
Stainless steel 430 fixing base. Quick water stop connector
IP68 pre-mounted on the cable.

Adjustable spotlight


Aluminum 6060T5 support.
Stainless steel 430 fixing base. Quick water stop connector
IP68 pre-mounted on the cable.

Adjustable spotlight for pole

Aluminum support in 6082 material. Resin cable joints IP68
made on the power cord.

Fixed applique

Wall

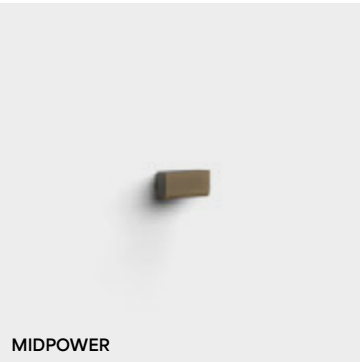




Performance data

Power (W)	5.5	5.2	7.5
Output (lm) 2K	410 (.13)	520 (.01)	620 (.13)
Output (lm) 3K	425 (.13)	540 (.01)	645 (.13)
Output (lm) 4K	450 (.13)	580 (.01)	685 (.13)
L80 B10 lifetime (hrs)	41.000 hrs	38.000 hrs	41.000 hrs

Build data

Voltage	xxx 50-60Hz	xxx 50-60Hz	xxx 50-60Hz
Power supply	Included	Included	Included
External cable	Single neoprene cable c/w IP68 connector	Single neoprene cable c/w IP68 connector	Single neoprene cable c/w IP68 connector
Protection rating	IP66	IP66	IP66
IK	08	08	08

Dimensions

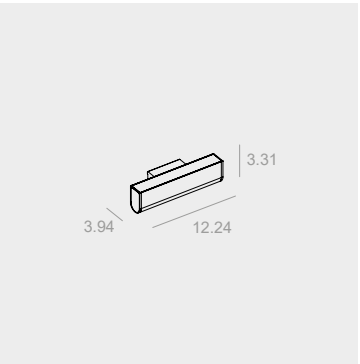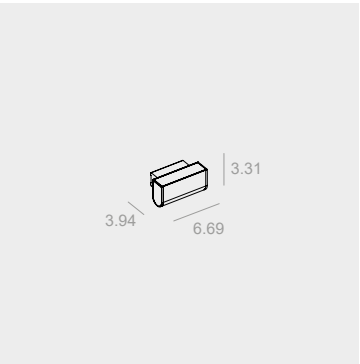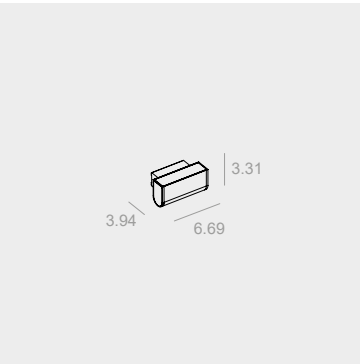

● Finish

_1	Anthracite	_1	Anthracite	_1	Anthracite
_4	Grey Aluminum	_4	Grey Aluminum	_4	Grey Aluminum
_P	Bronze	_P	Bronze	_P	Bronze

■ CCT

_2	2.7K - CRI 80 (CRI 90 on request)	_2	2.7K - CRI 80 (CRI 90 on request)	_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)	_3	3.0K - CRI 80 (CRI 90 on request)	_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)	_4	4.0K - CRI 80 (CRI 90 on request)	_4	4.0K - CRI 80 (CRI 90 on request)

▲ Beam

_13	38°	_01	10°	_13	38°
_23	90°	_13	38°	_23	90°
_06	Asymmetric	_38	Elliptical 40x10°	_06	Asymmetric

Code composition ON/OFF

33201	— — —	33212	— — —	33202	— — —
● ■ ▲		● ■ ▲		● ■ ▲	

Code composition DALI2

33221	— — —	33232	— — —	33222	— — —
● ■ ▲		● ■ ▲		● ■ ▲	

Fixed applique

Wall




Performance data

Power (W)	11.0
Output (lm) 2K	1040 (.01)
Output (lm) 3K	1080 (.01)
Output (lm) 4K	1160 (.01)
L80 B10 lifetime (hrs)	38.000 hrs

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

Dimensions

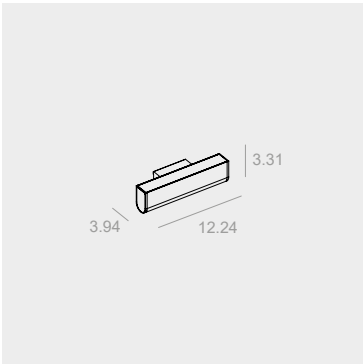

Finish

_1	Anthracite
_4	Grey Aluminum
_P	Bronze

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_01	10°
_13	38°
_38	Elliptical 40x10°

Code composition
ON/OFF

33213	— — —
	● ■ ▲

Code composition
DALI2

33206	— — —
	● ■ ▲

Accessories

Honeycomb screen to be ordered together with the product code



Product Code	Accessory Code
33201	A 1810
33212	A 1810
33202	A 1811
33213	A 1811

Adjustable applique

Wall




Performance data

Power (W)	7.5
Output (lm) 2K	620 (.13)
Output (lm) 3K	645 (.13)
Output (lm) 4K	685 (.13)
L80 B10 lifetime (hrs)	41.000 (Ta 40°)

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

Dimensions

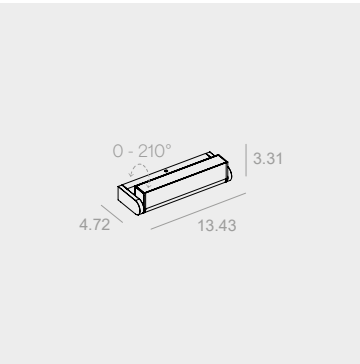

Finish

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_13	38°
_23	90°
_06	Asymmetric

Code composition
ON/OFF

33215	— — —
	● ■ ▲

Code composition
DALI2

33235	— — —
	● ■ ▲




Performance data

Power (W)	11.0
Output (lm) 2K	1040 (.01)
Output (lm) 3K	1080 (.01)
Output (lm) 4K	1160 (.01)
L80 B10 lifetime (hrs)	38.000 (Ta 40°)

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

Dimensions

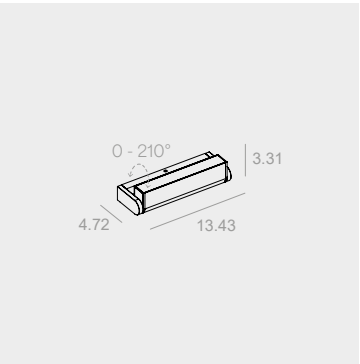

Finish

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_01	10°
_13	38°
_38	Elliptical 40x10°

Code composition
ON/OFF

33228	— — —
	● ■ ▲

Code composition
DALI2

33248	— — —
	● ■ ▲




Performance data

Power (W)	15.0
Output (lm) 2K	1245 (.13)
Output (lm) 3K	1295 (.13)
Output (lm) 4K	1375 (.13)
L80 B10 lifetime (hrs)	41.000 (Ta 40°)

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

Dimensions

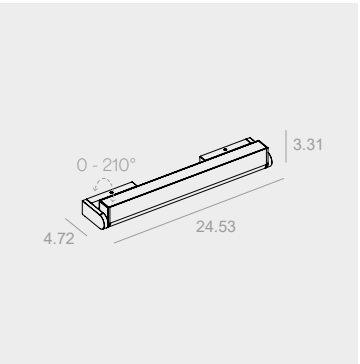

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)


_13	38°
_23	90°
_06	Asymmetric

33216	— — —
	● ■ ▲

33236	— — —
	● ■ ▲

Adjustable applique

Wall

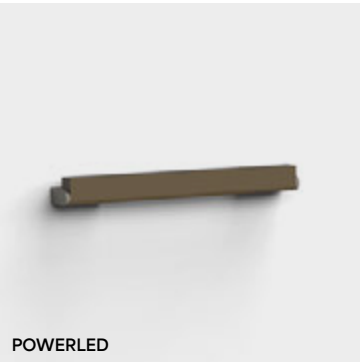

Performance data

Power (W)	20.0
Output (lm) 2K	2085 (.01)
Output (lm) 3K	2170 (.01)
Output (lm) 4K	2330 (.01)
L80 B10 lifetime (hrs)	38.000 (Ta 40°)

21.0
1870 (.13)
1945 (.13)
2060 (.13)
41.000 (Ta 40°)

29.0
3120 (.01)
3250 (.01)
3495 (.01)
38.000 (Ta 40°)




Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

xxx 50-60Hz
Included
Single neoprene cable c/w IP68 connector
IP66
08

xxx 50-60Hz
Included
Single neoprene cable c/w IP68 connector
IP66
08

Dimensions

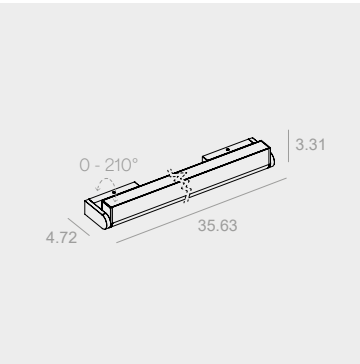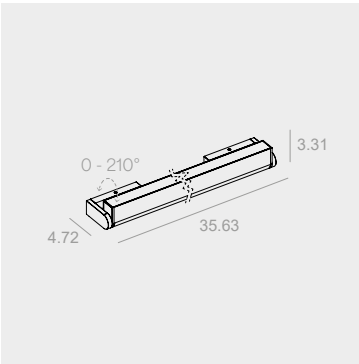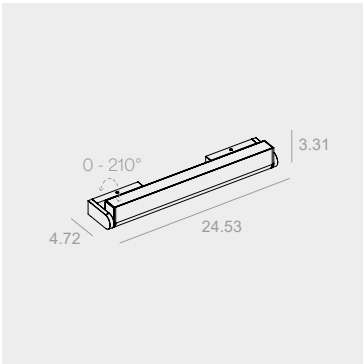

Finish

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_01	10°
_13	38°
_38	Elliptical 40x10°

_13	38°
_23	90°
_06	Asymmetric

_01	10°
_13	38°
_38	Elliptical 40x10°

Code composition ON/OFF

33229	● ■ ▲
-------	-------

33217	● ■ ▲
-------	-------

33230	● ■ ▲
-------	-------

Code composition DALI2

33249	● ■ ▲
-------	-------

33237	● ■ ▲
-------	-------

33250	● ■ ▲
-------	-------

Adjustable applique

Wall



Performance data

Power (W)	28.0
Output (lm) 2K	2490 (.13)
Output (lm) 3K	2595 (.13)
Output (lm) 4K	2753 (.13)
L80 B10 lifetime (hrs)	41.000 (Ta 40°)



38.0
4165 (.01)
4340 (.01)
4465 (.01)
38.000 (Ta 40°)

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

xxx 50-60Hz
Included
Single neoprene cable c/w IP68 connector
IP66
08

Dimensions

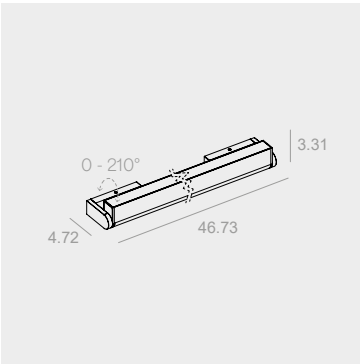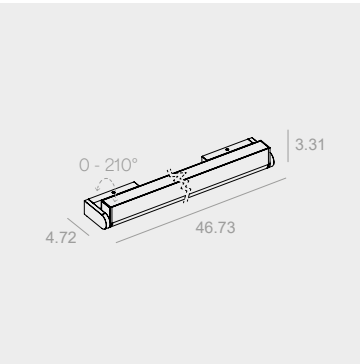

Finish

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_13	38°
_23	90°
_06	Asymmetric

_01	10°
_13	38°
_38	Elliptical 40x10°

Code composition ON/OFF

33218	● ■ ▲
-------	-------

33231	● ■ ▲
-------	-------

Code composition DALI2

33238	● ■ ▲
-------	-------

33251	● ■ ▲
-------	-------

Accessories

Honeycomb screen to be ordered together with the product code




Product Code	Accessory Code
33215	A 1811
33228	A 1811
33216	A 1812
33229	A 1812
33217	A 1813
33230	A 1813
33218	A 1814
33231	A 1814

Recessed - Trimless

Floor




Performance data			
Power (W)	7.5	11.0	15.0
Output (lm) 2K	320 (.13)	1040 (.01)	1245 (.13)
Output (lm) 3K	645 (.13)	1080 (.01)	1295 (.13)
Output (lm) 4K	685 (.13)	1160 (.01)	1375 (.13)
L80 B10 lifetime (hrs)	41.000 (Ta 40°)	38.000 (Ta 40°)	41.000 (Ta 40°)
Build data			
Voltage	xxx 50-60Hz	xxx 50-60Hz	xxx 50-60Hz
Power supply	Included	Included	Included
External cable	Single neoprene cable	Single neoprene cable	Single neoprene cable
Protection rating	IP67	IP67	IP67
IK	10 Carrabile - Driver Over	10 Carrabile - Driver Over	10 Carrabile - Driver Over

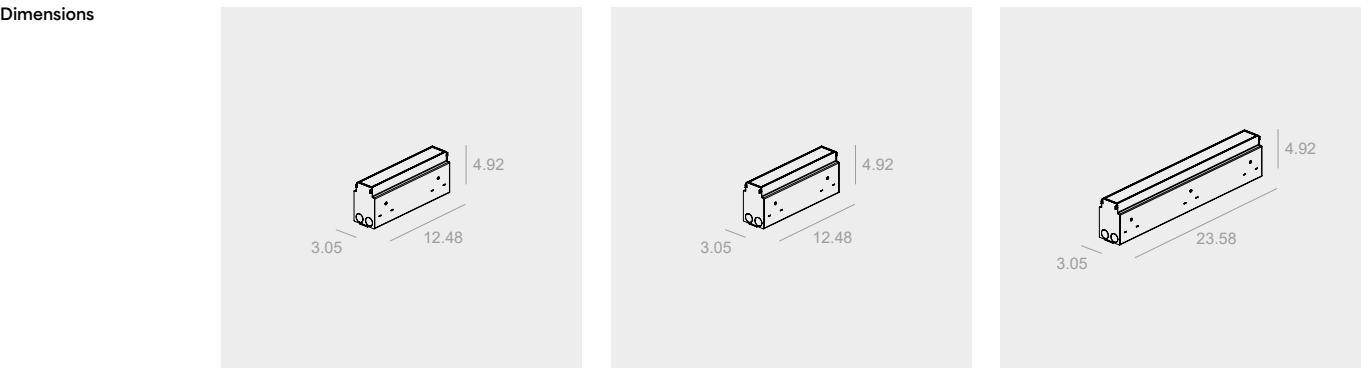


● Finish	_9 Total Glass	_9 Total Glass	_9 Total Glass
■ CCT	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)
▲ Beam	_13 38° _23 90° _06 Asymmetric	_01 10° _13 38° _38 Elliptical 40x10°	_13 38° _23 90° _06 Asymmetric
Code composition ON/OFF	13201 ● ■ ▲	13211 ● ■ ▲	13202 ● ■ ▲
Code composition DALI2	13221 ● ■ ▲	13231 ● ■ ▲	13222 ● ■ ▲

Recessed - Trimless

Floor

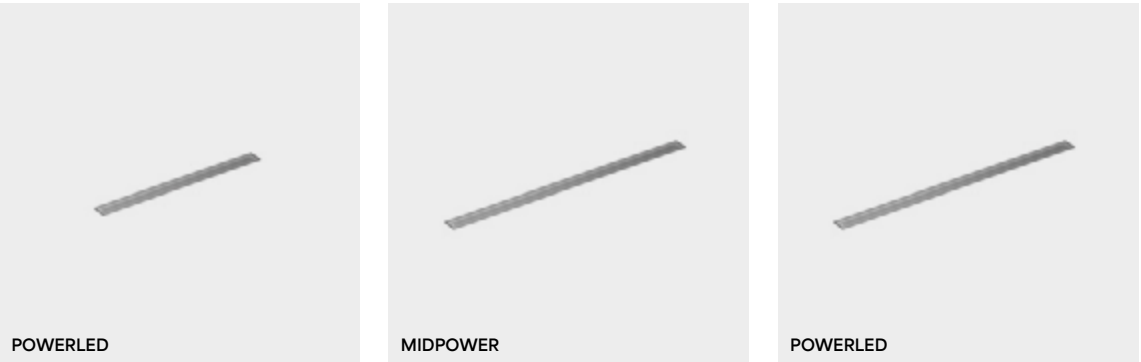


Performance data			
Power (W)	20.0	21.0	29.0
Output (lm) 2K	2085 (.01)	1870 (.13)	3120 (.01)
Output (lm) 3K	2170 (.01)	1945 (.13)	3250 (.01)
Output (lm) 4K	2330 (.01)	2060 (.13)	3495 (.01)
L80 B10 lifetime (hrs)	38.000 (Ta 40°)	41.000 (Ta 40°)	38.000 (Ta 40°)
Build data			
Voltage	xxx 50-60Hz	xxx 50-60Hz	xxx 50-60Hz
Power supply	Included	Included	Included
External cable	Single neoprene cable	Single neoprene cable	Single neoprene cable
Protection rating	IP67	IP67	IP67
IK	10 Carrabile - Driver Over	10 Carrabile - Driver Over	10 Carrabile - Driver Over

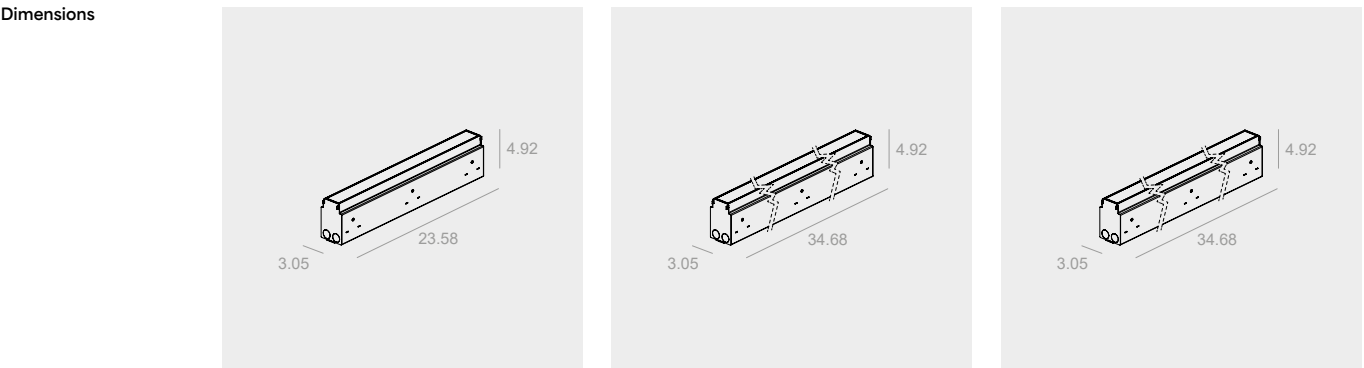

● Finish	_9 Total Glass	_9 Total Glass	_9 Total Glass
■ CCT	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)
▲ Beam	_01 10° _13 38° _38 Elliptical 40x10°	_13 38° _23 90° _06 Asymmetric	_01 10° _13 38° _38 Elliptical 40x10°
Code composition ON/OFF	13212 ● ■ ▲	13203 ● ■ ▲	13213 ● ■ ▲
Code composition DALI2	13232 ● ■ ▲	13223 ● ■ ▲	13233 ● ■ ▲

Recessed - Trimless

Floor

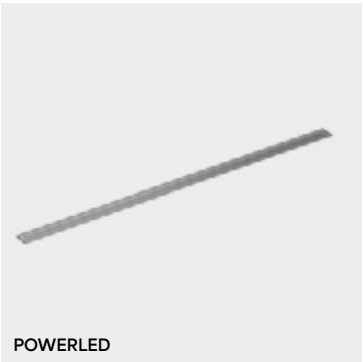

Accessories


Honeycomb screen to be ordered together with the product code



1.30

Product Code	Accessory Code
13201	A 1811
13211	A 1811
13202	A 1812
13212	A 1812
13203	A 1813
13213	A 1813
13204	A 1814
13214	A 1814

A 9990
IP68 three-pole water stop connector for 0.28 to 0.47 in. sheathed cables



Ø0.91 3.27



Performance data

Power (W)	28.0	38.0
Output (lm) 2K	2490 (.13)	4165 (.01)
Output (lm) 3K	2595 (.13)	4340 (.01)
Output (lm) 4K	2753 (.13)	4665 (.01)
L80 B10 lifetime (hrs)	41.000 (Ta 40°)	38.000 (Ta 40°)

Build data

Voltage	xxx 50-60Hz	xxx 50-60Hz
Power supply	Included	Included
External cable	Single neoprene cable	Single neoprene cable
Protection rating	IP67	IP67
IK	10 Carrabile - Driver Over	10 Carrabile - Driver Over

Dimensions

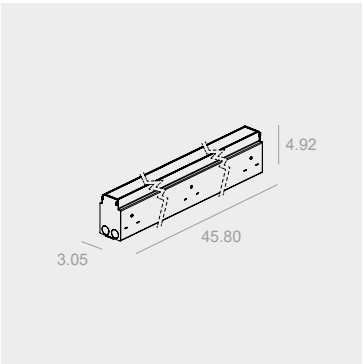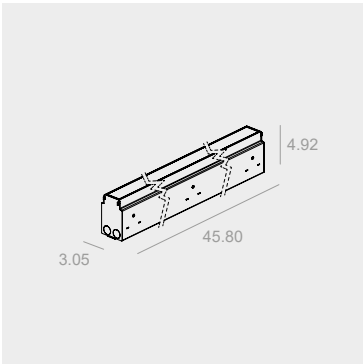

● Finish	_9 Total Glass
■ CCT	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)
▲ Beam	_13 38° _23 90° _06 Asymmetric


Code composition ON/OFF	13204	— — — ● ■ ▲
Code composition DALI2	13224	— — — ● ■ ▲

● Finish	_9 Total Glass
■ CCT	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)
▲ Beam	_01 10° _13 38° _38 Elliptical 40x10° ●

Code composition ON/OFF	13214	— — — ● ■ ▲
Code composition DALI2	13234	— — — ● ■ ▲

Recessed - Trimless

Floor

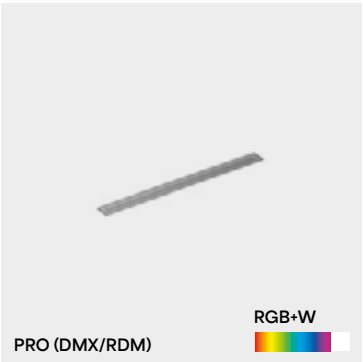




Performance data

Power (W)	34.0	65.0	97.2
Nominal lumen Red	507	1.014	1.521
Nominal lumen Green	896	1.792	2.688
Nominal lumen Blue	123	246	369
Nominai lumen white (3K)	864	1.728	2.592
L90 lifetime (hrs)	41.000 hrs (Ta 35°)	41.000 hrs (Ta 35°)	41.000 hrs (Ta 35°)

Build data

Voltage	xxx 50-60Hz	xxx 50-60Hz	xxx 50-60Hz
Power supply	Included	Included	Included
External cable	Double input: Power + DMX RDM in / out	Double input: Power + DMX RDM in / outv	Double input: Power + DMX RDM in / out
Protection rating	IP67	IP67	IP67
IK	10 Carrabile - Driver Over	10 Carrabile - Driver Over	10 Carrabile - Driver Over

Dimensions

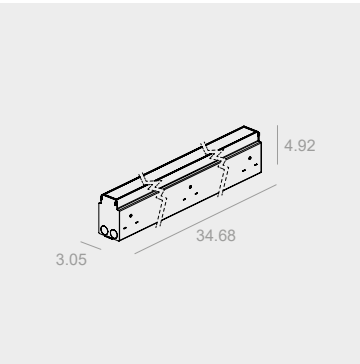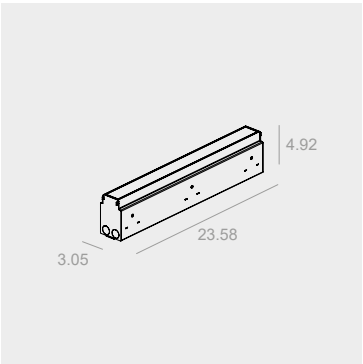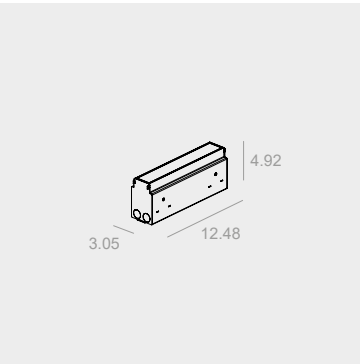

● Finish	_9 Total Glass	_9 Total Glass	_9 Total Glass
■ CCT	_5 RGB+W (3.0K)	_5 RGB+W (3.0K)	_5 RGB+W (3.0K)
▲ Beam	_12 24° _03 50° _38 Elliptical 40x10° ●	_12 24° _03 50° _38 Elliptical 40x10° ●	_12 24° _03 50° _38 Elliptical 40x10° ●


Code composition ON/OFF	13205	— — — ● ■ ▲
-------------------------	-------	----------------

Code composition ON/OFF	13206	— — — ● ■ ▲
-------------------------	-------	----------------

Code composition ON/OFF	13207	— — — ● ■ ▲
-------------------------	-------	----------------


Recessed - Trimless

Floor

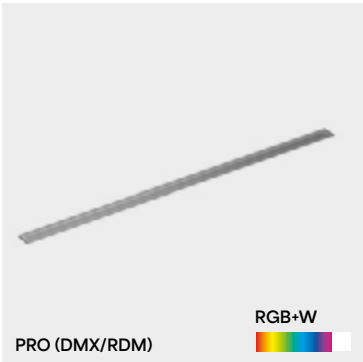

Performance data	
Power (W)	130.0
Nominal lumen Red	2.028
Nominal lumen Green	3.584
Nominal lumen Blue	492
Nominal lumen white (3K)	3.456
L90 lifetime (hrs)	38.000 hrs (Ta 35°)

Build data	
Voltage	xxx 50-60Hz
Power supply	Included
External cable	Double input: Power + DMX RDM in / out
Protection rating	IP67
IK	10 Carrabile - Driver Over

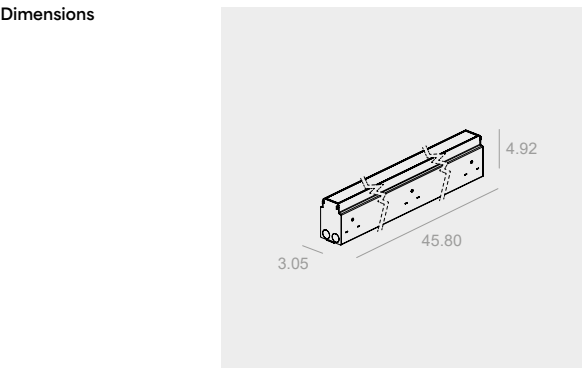

● Finish	_9 Total Glass
■ CCT	_5 RGB+W (3.0K)
▲ Beam	_12 24° _03 50° _38 Elliptical 40x10°
Code composition ON/OFF	13208 ● ■ ▲

Accessories

A small, rectangular, black honeycomb screen.

Honeycomb screen to be ordered together with the product code

A small, cylindrical, black connector with a red stripe.

A 9990
IP68 three-pole water stop connector for 0.28 to 0.47 in. sheathed cables


Product Code	Accessory Code
13205	A 1811
13206	A 1811
13207	A 1812
13208	A 1812

COLOR BOOST

LUMENS x3


Adjustable bollard

Floor

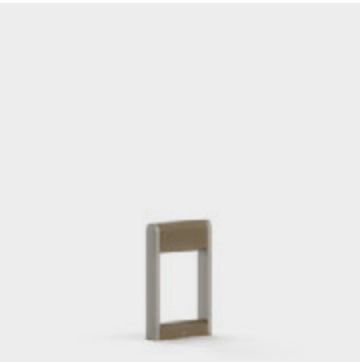

Performance data	
Power (W)	5.5
Output (lm) 2K	265
Output (lm) 3K	275
Output (lm) 4K	295
L80 B10 lifetime (hrs)	41.000 (Ta 40°)

Build data	
Voltage	120V 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

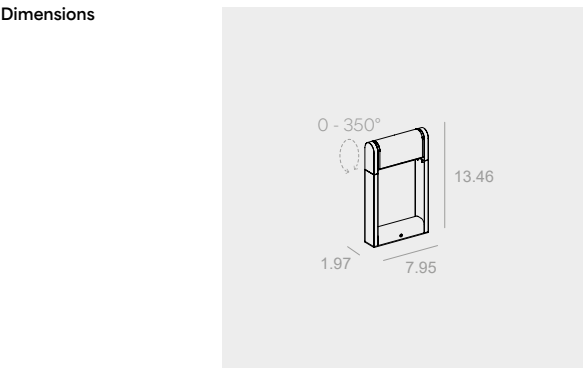


● Finish	_N Anthracite + Grey Aluminum _O Titanium + Bronze
■ CCT	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)
▲ Beam	_05 Diffused

Code composition ON/OFF	63201 ● ■ ▲
-------------------------	----------------



Power (W)	5.5
Output (lm) 2K	265
Output (lm) 3K	275
Output (lm) 4K	295
L80 B10 lifetime (hrs)	41.000 (Ta 40°)

Voltage	120V 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

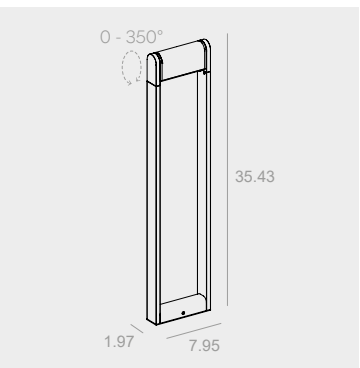

● Finish	_N Anthracite + Grey Aluminum _O Titanium + Bronze
■ CCT	_2 2.7K - CRI 80 (CRI 90 on request) _3 3.0K - CRI 80 (CRI 90 on request) _4 4.0K - CRI 80 (CRI 90 on request)
▲ Beam	_05 Diffused

Code composition ON/OFF	63202 ● ■ ▲
-------------------------	----------------


Accessories

A small, rectangular, metallic plate with a circular hole.

A 1804
Coach plate

Adjustable spotlight

Floor

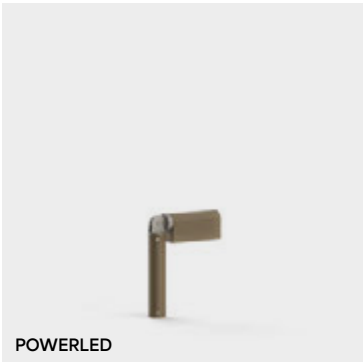

Performance data

Power (W)	5.0
Output (lm) 2K	520 (.01)
Output (lm) 3K	540 (.01)
Output (lm) 4K	580 (.01)
L80 B10 lifetime (hrs)	38.000 (Ta 40°)



5.0
520 (.01)
540 (.01)
580 (.01)
38.000 (Ta 40°)

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable c/w IP68 connector
Protection rating	IP66
IK	08

xxx 50-60Hz
Included
Single neoprene cable c/w IP68 connector
IP66
08

Dimensions

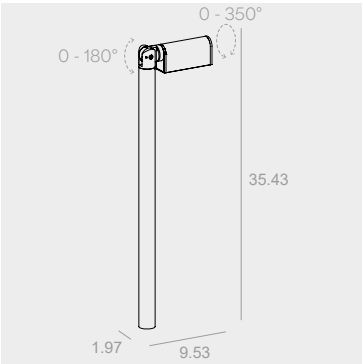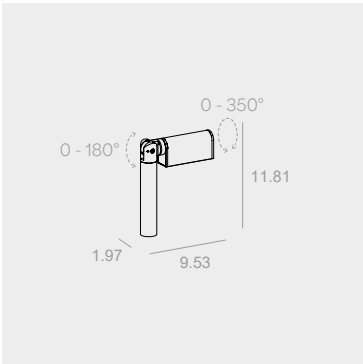

Finish

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

_N	Anthracite + Grey Aluminum
_O	Titanium + Bronze

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_01	10°
_13	38°
_38	Elliptical 40x10°
_70	Elliptical 10x40°


_01	10°
_13	38°
_38	Elliptical 40x10°
_70	Elliptical 10x40°

Code composition
ON/OFF

43201	—	—	—
	●	■	▲


43202	—	—	—
	●	■	▲

Accessories

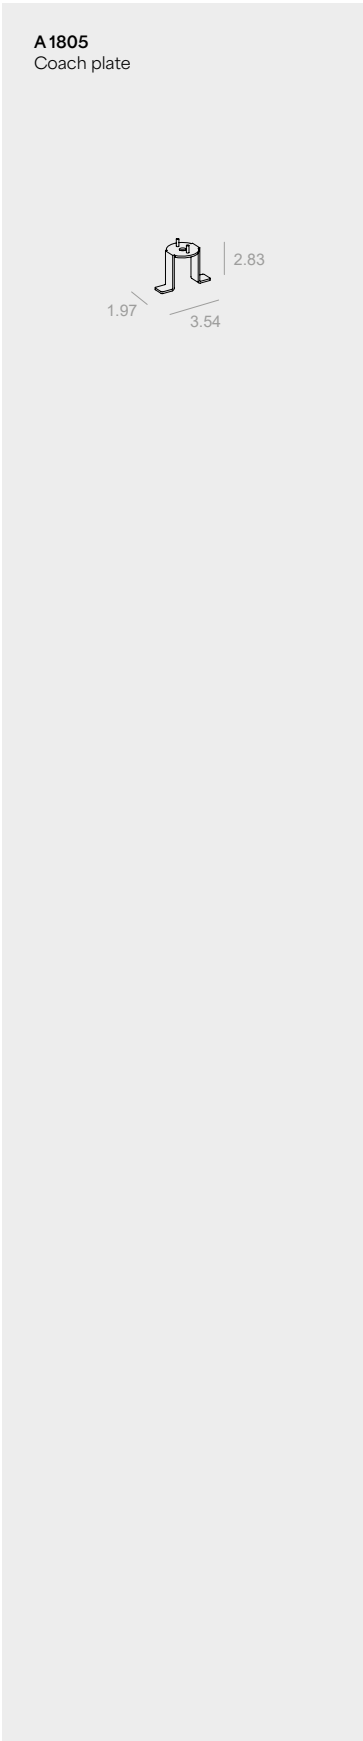

Adjustable spotlight for pole

Pole (Ø 2.36 or 2.99 in)

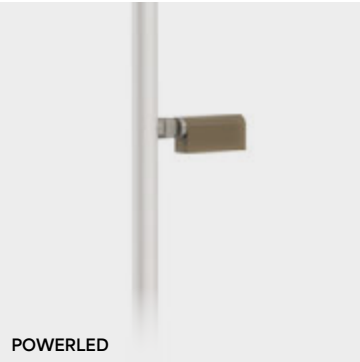

Performance data

Power (W)	5.0
Output (lm) 2K	520 (.01)
Output (lm) 3K	540 (.01)
Output (lm) 4K	580 (.01)
L80 B10 lifetime (hrs)	38.000 hrs



5.0
1040 (.01)
540 (.01)
580 (.01)
38.000 hrs

Build data

Voltage	xxx 50-60Hz
Power supply	Included
External cable	Single neoprene cable IP66
Protection rating	IP66
IK	08

xxx 50-60Hz
Included
Single neoprene cable IP66
IP66
08

Dimensions

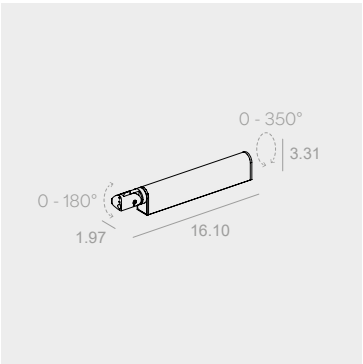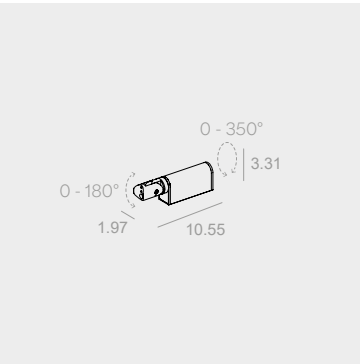

Finish

_1	Anthracite
_4	Grey Aluminum

_1	Anthracite
_4	Grey Aluminum

CCT

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

_2	2.7K - CRI 80 (CRI 90 on request)
_3	3.0K - CRI 80 (CRI 90 on request)
_4	4.0K - CRI 80 (CRI 90 on request)

Beam

_01	10°
_13	38°
_38	Elliptical 40x10°
_70	Elliptical 10x40°

_01	10°
_13	38°
_38	Elliptical 40x10°
_70	Elliptical 10x40°

Code composition
ON/OFF

73212	—	—	—
	●	■	▲


73214	—	—	—
	●	■	▲

Technical data

DATA SHEET , .LDT, .IES, BIM , 3D-3DS, DWG available on the web site francesconi.it


APPLIQUE

Ground distance 13.12 ft

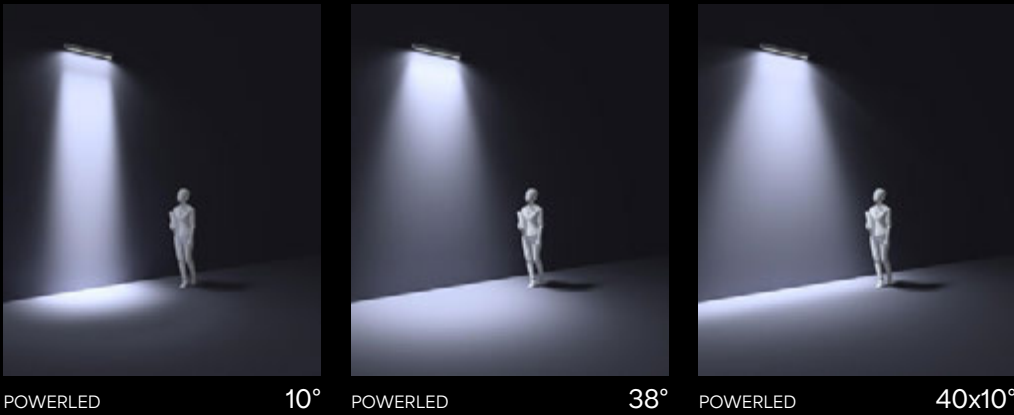


RECESSED

Wall distance 1.31 ft

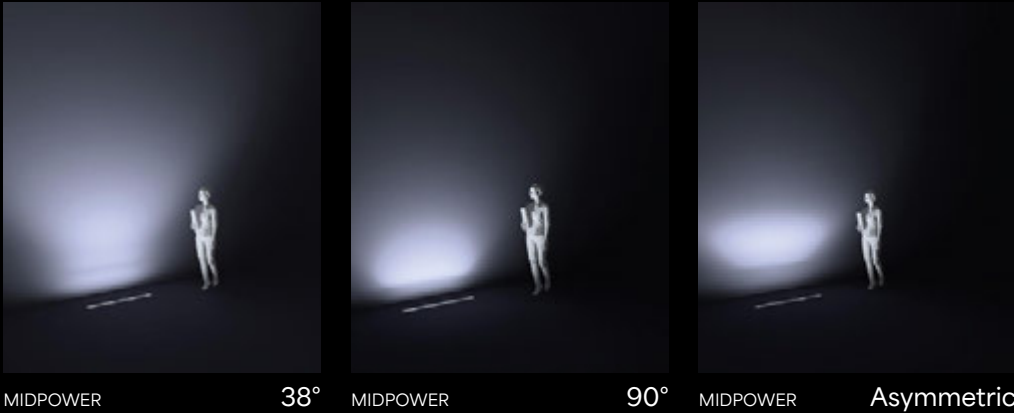


RECESSED

Wall distance 0.66 ft

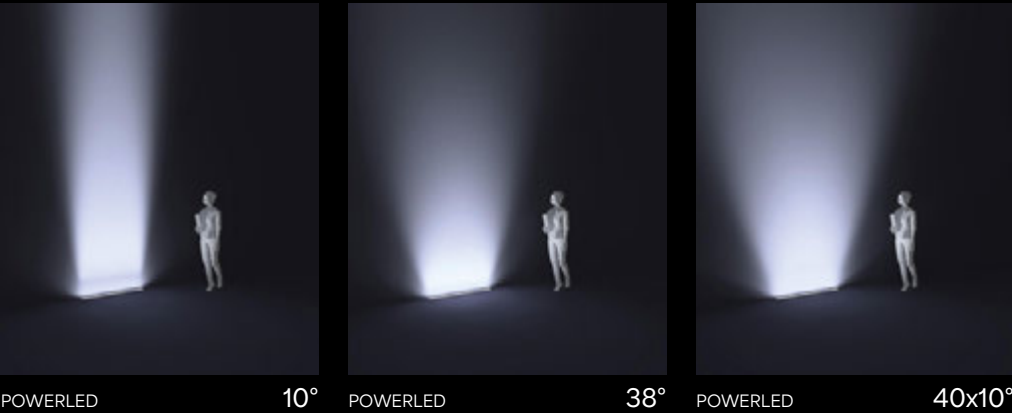


SPOTLIGHT

Ground distance 0.98 ft

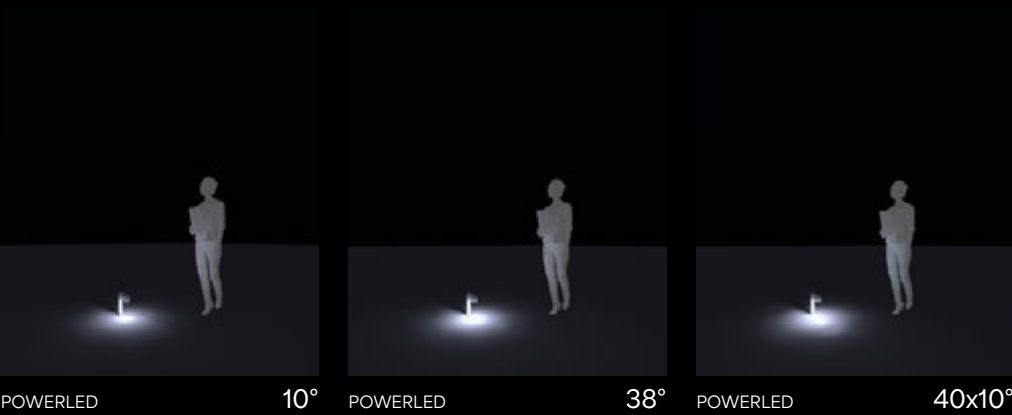

SPOTLIGHT

Ground distance 2.62 ft

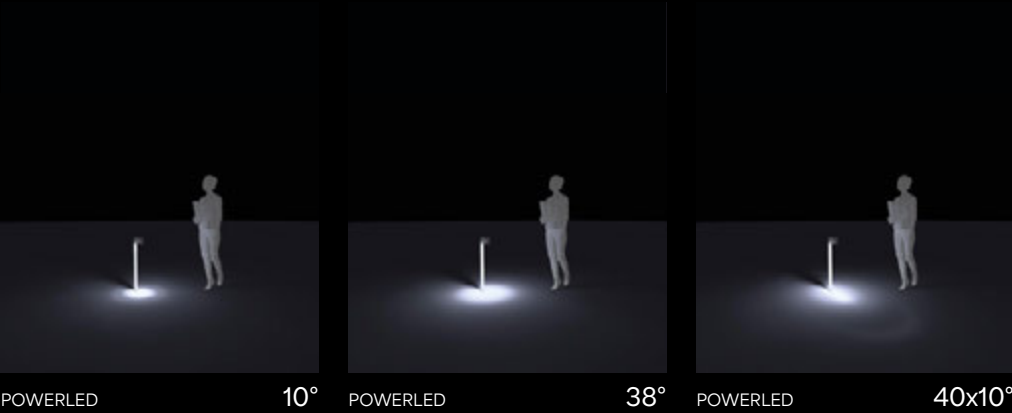

Technical data

DATA SHEET , .LDT, .IES, BIM , 3D-3DS, DWG available on the web site francesconi.it

BOLLARD

Ground distance 0.98 ft



MIDPOWER

BOLLARD

Ground distance 2.95 ft



MIDPOWER

SPOTLIGHT FOR POLE

Ground distance 11.48 ft



POWERLED

10°



POWERLED

38°



POWERLED

40x10°

Giuseppe Maurizio Scutellà

Accurate industrial designer, keen on the most significant and heterogeneous design and artistic trends. He combines a dual soul within his own proposal: the technical and the artistic one. He has got an important technical background, which allows him to use either the “Form Follows Function” or the “Function Follows Form” philosophy depending on the theme to be managed.

Characteristics of the mentioned products, technical and photometric details and dimensional features are not binding. Without any prior notice, our company retains the right to perform any modification deemed necessary to our needs.

Any commercial name, brand, graphic design or logo hereby represented is sole property of the rightful owners, and is used solely for the sake of comprehension. Reproduction, even partial, of this catalogue is strictly forbidden.

FRANCESCONI
designplan® 

UNI ISO 9001:2015 CERTIFICATION