


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY 110 is the Ø4.3" 5W or 7W version.

## TECHNICAL DATA

<b>Wattage</b>	5W, 7W
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B0-U3-G0 (3000K) B0-U4-G0 (3000K - 7W - 21°, 45°, 60°)
<b>Delivered Lumens</b>	550 lm (5W, 3000K) 750 lm (7W, 3000K)
<b>Efficacy</b>	110 lm/W (5W, 3000K) 107 lm/W (7W, 3000K)
<b>Optics</b>	6°, 21°, 45°, 65°, Wall Washer
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	Ø4.33" x 5.12" (N110)
<b>IP Rating</b>	IP66, IP67
<b>Impact Resistance</b>	IK09
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components



Fixture Dimensions

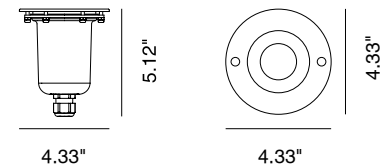

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: **SPT1011036BHC.US**. Accessories ordered separately.

					<b>.US</b>
Model No.	CCT	Optics	Finish	Filter	
SPT10110 (5W)	1 - 2200K	1 - 6°	N - Inox Natural	None	<b>.US</b>
SPT10150 (7W)	2 - 2700K	2 - 21°	G - Inox Graphite	HC - Honeycomb	
	3 - 3000K	4 - 45°	B - Inox Bronze	HA - Asymmetric	
	4 - 4000K	6 - 65°		<b>NOTE:</b> Honeycomb and Asymmetric Filter NOT available on 6° or Wall Washer optics	
		7 - Wall Washer			

Job Name/Date:

Fixture Type Designation:

## VERSIONS



Asymmetric Lens



Honeycomb Lens

## FINISHES



Inox Natural




Inox Graphite



Inox Bronze

## ACCESSORIES




**PT52122**

Casing


for ground recessing

9.84" x 6.30"



Ø9.84"

Ø6.30"




**PT40001**


Bottom Cap

Screwless

Ø8.66"



Ø8.66"




**PT40002**

Mortar Cap

With Screws

Ø4.33"



Ø4.33"

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA

NOTE: All photometry is 3000K


### 5W - 21°

Maximum Candela = 1993.5

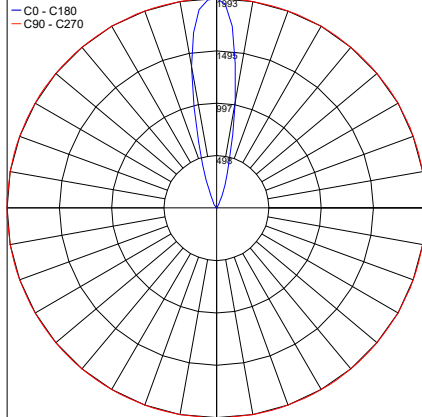


### 5W - 45°

Maximum Candela = 674.2

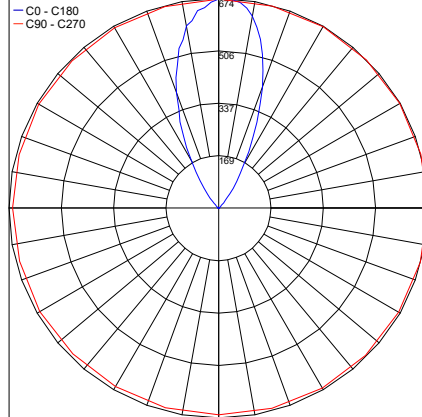


### 5W - 65°

Maximum Candela = 389.9

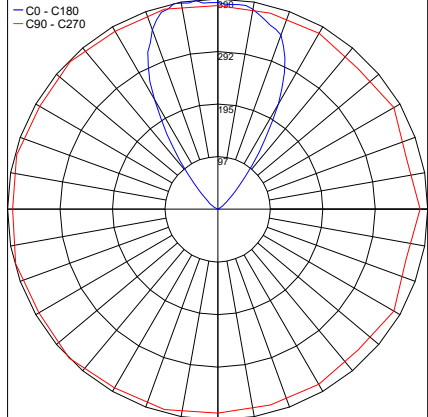


### with Honeycomb Filter


Maximum Candela = 1955.1

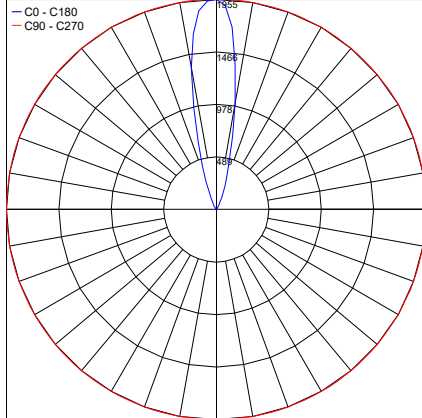

Maximum Candela = 661.2

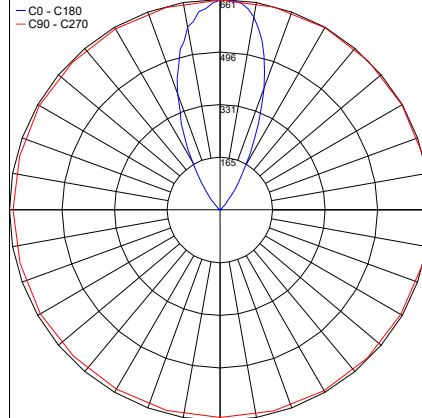


Maximum Candela = 382.4

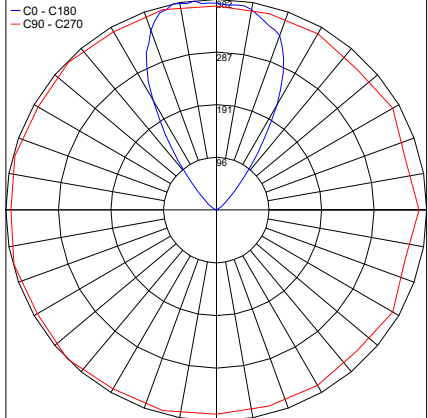


### 7W - 21°

Maximum Candela = 2587.7

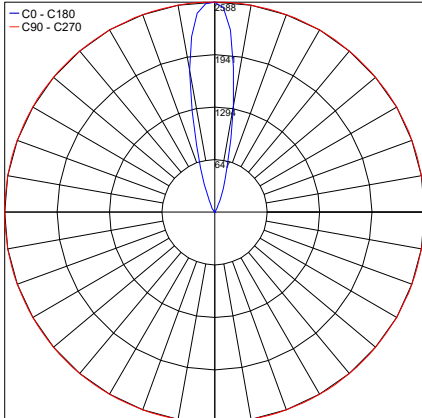


### 7W - 45°

Maximum Candela = 875.2

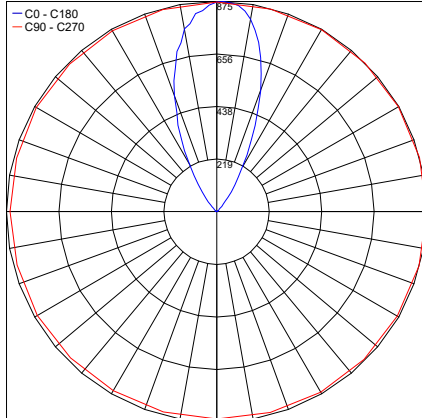

### 7W - 65°

Maximum Candela = 506.1

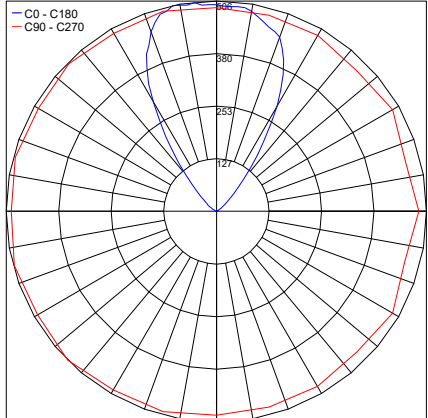

Job Name/Date:

Fixture Type Designation: