


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY 110 is the Ø4.3" 5W version.

## TECHNICAL DATA

<b>Wattage</b>	5W, 7W
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B0-U3-G0 (3000K)
<b>Delivered Lumens</b>	550 lm (5W, 3000K) 750 lm (7W, 3000K)
<b>Efficacy</b>	110 lm/W (5W, 3000K) 107 lm/W (7W, 3000K)
<b>Optics</b>	6°, 21°, 45°, 65°, Wall Washer
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	Ø4.33" x 5.12" (N110)
<b>IP Rating</b>	IP66, IP67
<b>Impact Resistance</b>	IK09
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components



Fixture Dimensions

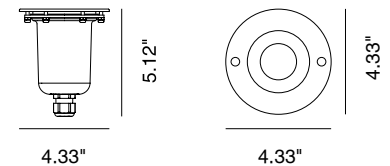

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT1011036B.US. Accessories ordered separately.

SPT10110					.US
Model No.	CCT	Optics	Finishes	Filter	
SPT10110 (N-110)	<b>0</b> - GU10 <b>2</b> - 2700K <b>3</b> - 3000K <b>4</b> - 4000K	<b>0</b> - GU10 <b>1</b> - 6° <b>2</b> - 21° <b>4</b> - 45° <b>6</b> - 65° <b>7</b> - Wall Washer	<b>N</b> - Inox Natural <b>G</b> - Inox Graphite <b>B</b> - Inox Bronze	None <b>HC</b> - Honeycomb <b>HCA</b> - Asymmetric <b>NOTE:</b> Honeycomb and Asymmetric Filter not available on 6° or Wall Washer optics	.US

Job Name/Date:

Fixture Type Designation:

## VERSIONS



Asymmetric Lens



Honeycomb Lens

## FINISHES



Inox Natural




Inox Graphite




Inox Bronze


## ACCESSORIES



**PT52122**  
Draining Casing  
for ground recessing



**PT40001**  
Ring Nut  
Screwless



**PT40002**  
Ring Nut  
With Screws


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

NOTE: All photometry is 3000K

Maximum Candela = 1993.5

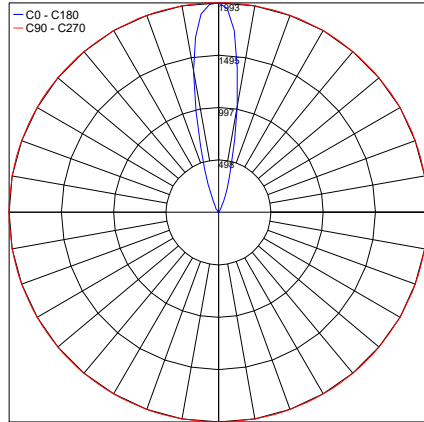


PHOTOMETRIC FILENAME : OLY N110 3000K 21° - PT1011032B.IES

N110

21°


Maximum Candela = 674.2

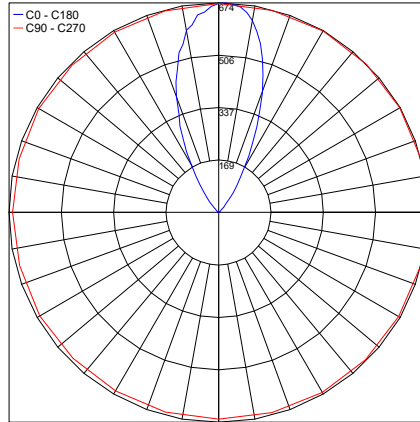

PHOTOMETRIC FILENAME : OLY N110 3000K 45° - PT1011034B.IES

45°

Maximum Candela = 389.9

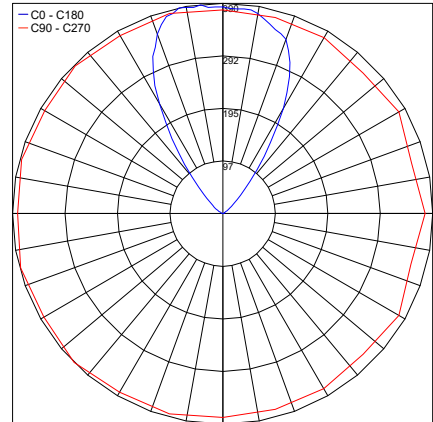

PHOTOMETRIC FILENAME : OLY N110 3000K 65° - PT1011036B.IES

65°

Job Name/Date:

Fixture Type Designation: