


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY 110 is the Ø4.3" 5W version.



TECHNICAL DATA

Wattage	5W (N-110)
Power Supply	Integral 120VAC
Construction	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	550 lm (5W, 3000K)
Efficacy	110 lm/W (5W, 3000K)
Optics	6°, 21°, 45°, 65°, Asymmetrical
BUG Rating	B0-U3-G0 (3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Ø4.33" x 5.12" (N110)
IP Rating	IP66, IP67
Impact Resistance	IK09

Fixture Dimensions

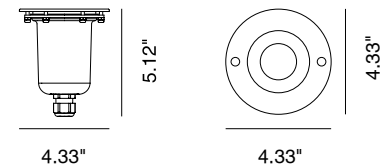

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes *Inox Natural*, *Inox Graphite* and *Inox Bronze*. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products *anti-fingerprint* and *anti-stain*.

ORDERING INFORMATION

Example: **SPT1011036B.US**. Accessories sold separately.

SPT10110				.US
Model No.	CCT	Optics	Finishes	
SPT10110 (N-110)	2 - 2700K 3 - 3000K 4 - 4000K	1 - 6° 2 - 21° 4 - 45° 6 - 65° 7 - Wall Washer	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural



Inox Graphite



Inox Bronze


ACCESSORIES



PT52119
Outer Casing
for OLY N110


PHOTOMETRIC DATA

NOTE: All photometry is 3000K

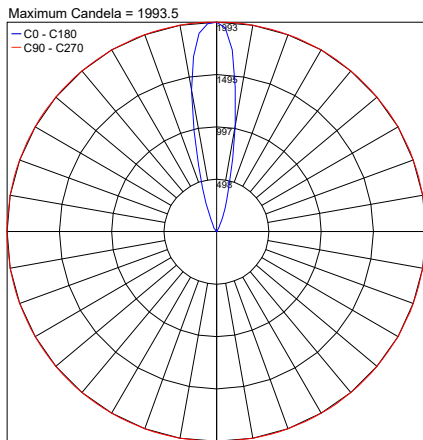


PHOTOMETRIC FILENAME : OLY N110 3000K 21° - PT1011032B.IES

N110 21°

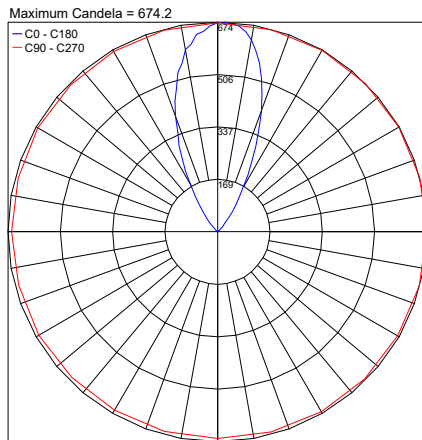

PHOTOMETRIC FILENAME : OLY N110 3000K 45° - PT1011034B.IES

45°

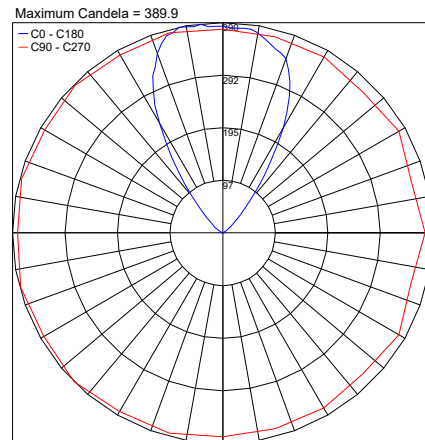

PHOTOMETRIC FILENAME : OLY N110 3000K 65° - PT1011036B.IES

65°

Job Name/Date:

Fixture Type Designation: