


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY N-240 is the Ø9.3" 24W version.



## TECHNICAL DATA

<b>Wattage / Input</b>	24W (N-240)
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>85
<b>BUG Rating</b>	B0-U5-G0 (3000K)
<b>Delivered Lumens</b>	3000 lm (9.3", 24W, 3000K)
<b>Efficacy</b>	125 lm/W (9.3", 24W, 3000K)
<b>Optics</b>	21°, 45°, 65°
<b>BUG Rating</b>	B0-U5-G0 (3000K)
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	Ø9.25" x 7.09" (N-240)
<b>IP Rating</b>	IP66, IP67
<b>Impact Resistance</b>	IK09
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components

Fixture Dimensions

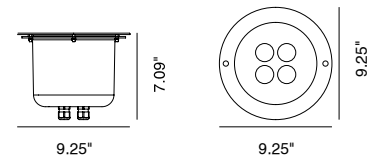

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT1014036B.US. Accessories sold separately.

SPT10140					.US
Model No.	CCT	Optics	Finishes	Honeycomb Filter	
SPT10140 (N-240)	2 - 2700K 3 - 3000K 4 - 4000K	2 - 21° 4 - 45° 6 - 65°	N - Inox Natural G - Inox Graphite B - Inox Bronze	None H - Horizontal	.US

Job Name/Date:

Fixture Type Designation:

## FINISHES



Inox Natural




Inox Graphite



Inox Bronze


## ACCESSORIES



**PT52319**  
Outer Casing  
for OLY N-240

## PHOTOMETRIC DATA


NOTE: All photometry is 3000K

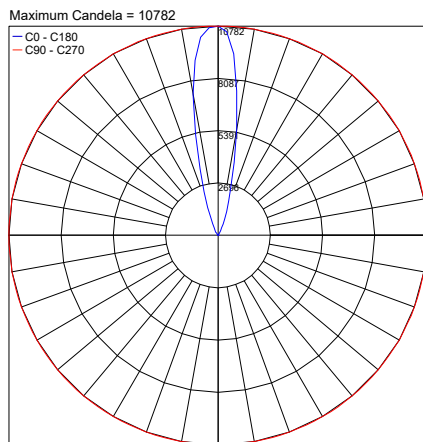

PHOTOMETRIC FILENAME : OLY N240 3000K 21° - PT1014032B.IES


N-240

21°

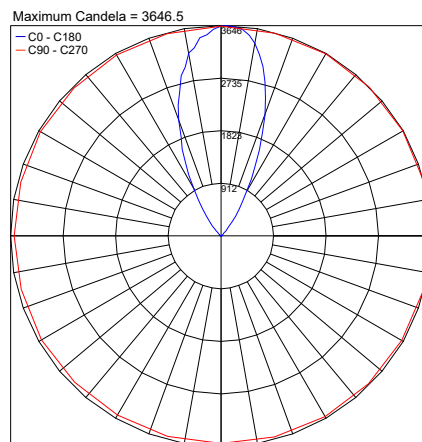

PHOTOMETRIC FILENAME : OLY N240 3000K 45° - PT1014034B.IES

45°

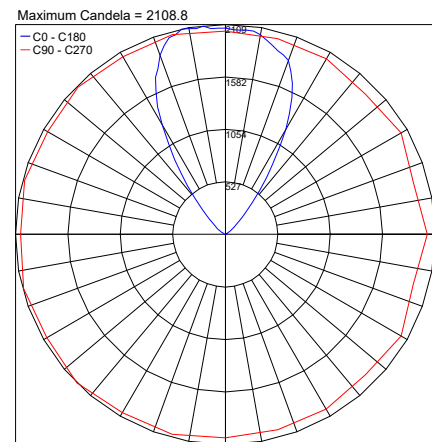

PHOTOMETRIC FILENAME : OLY N240 3000K 65° - PT1014036B.IES

65°

Job Name/Date:

Fixture Type Designation: