

OLY N-240

OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY N-240 is the Ø9.3" 24W version.




HONEYCOMB LENS

TECHNICAL DATA

Wattage	24W
Power Supply	Integral 120VAC
Construction	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B0-U5-G0 (3000K)
Delivered Lumens	3000 lm (3000K)
Efficacy	125 lm/W (3000K)
Optics	21°, 45°, 65°
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Ø9.25" x 7.09" (N-240)
IP Rating	IP66, IP67
Impact Resistance	IK09
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

Fixture Dimensions

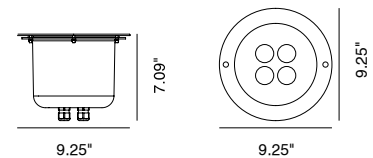

ORDERING INFORMATION

Example: SPT1014036B.US. Accessories ordered separately.

SPT10140					.US
Model No.	CCT	Optics	Finishes	Filter	
SPT10140 (24W)	2 - 2700K 3 - 3000K 4 - 4000K	2 - 21° 4 - 45° 6 - 65°	N - Inox Natural G - Inox Graphite B - Inox Bronze	None HC - Horizontal	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural




Inox Graphite



Inox Bronze

ACCESSORIES



PT52319

Outer Casing
8.66" w x 8.46" h


PHOTOMETRIC DATA

NOTE: All photometry is 3000K

21°

Maximum Candela = 10782

— C0 - C180
— C90 - C270

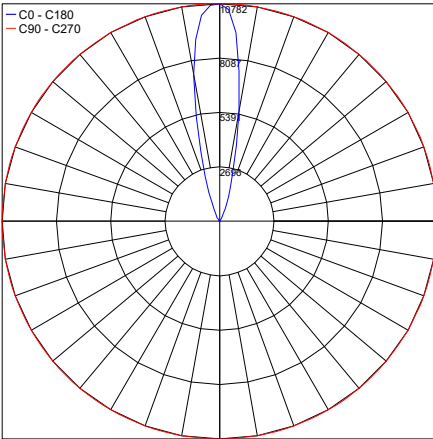


PHOTOMETRIC FILENAME : OLY N240 3000K 21° - PT1014032B.IES

45°

Maximum Candela = 3646.5

— C0 - C180
— C90 - C270

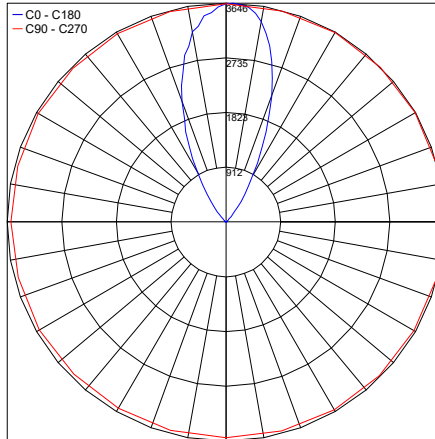


PHOTOMETRIC FILENAME : OLY N240 3000K 45° - PT1014034B.IES

65°

Maximum Candela = 2108.8

— C0 - C180
— C90 - C270

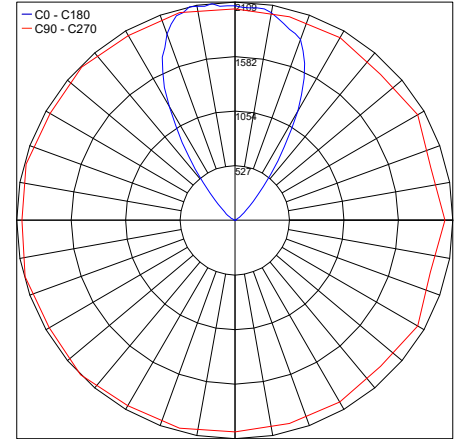

PHOTOMETRIC FILENAME : OLY N240 3000K 65° - PT1014036B.IES

Job Name/Date:

Fixture Type Designation: