

OLY N-240


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY N-240 is the Ø9.3" 24W version.



TECHNICAL DATA

Wattage / Input	24W (N-240)
Power Supply	Integral 120VAC
Construction	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	3000 lm (9.3", 24W, 3000K)
Efficacy	125 lm/W (9.3", 24W, 3000K)
Optics	21°, 45°, 65°
BUG Rating	B0-U5-G0 (3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Ø9.25" x 7.09" (N-240)
IP Rating	IP66, IP67
Impact Resistance	IK09

Fixture Dimensions

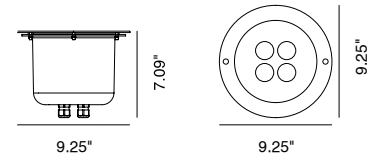

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes *Inox Natural*, *Inox Graphite* and *Inox Bronze*. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION

Example: SPT1014036B.US. Accessories sold separately.

SPT10140				.US
Model No.	CCT	Optics	Finishes	
SPT10140 (N-240)	2 - 2700K 3 - 3000K 4 - 4000K	1 - 6° 2 - 21° 4 - 45° 6 - 65° 7 - Wall Washer	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural



Inox Graphite



Inox Bronze


ACCESSORIES



PT52319
Outer Casing
for OLY N-240

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

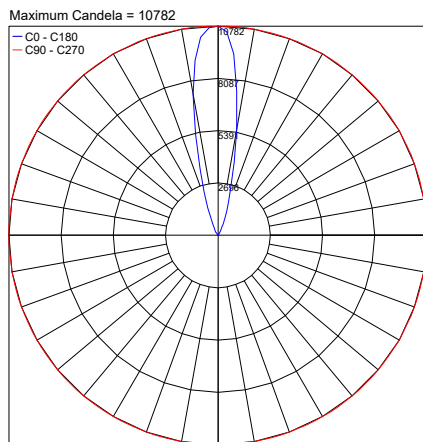

PHOTOMETRIC FILENAME : OLY N240 3000K 21° - PT1014032B.IES


N-240

21°

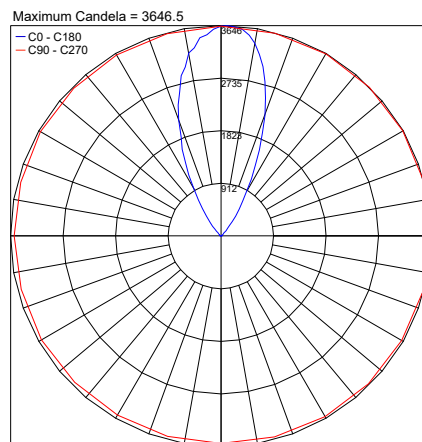

PHOTOMETRIC FILENAME : OLY N240 3000K 45° - PT1014034B.IES

45°

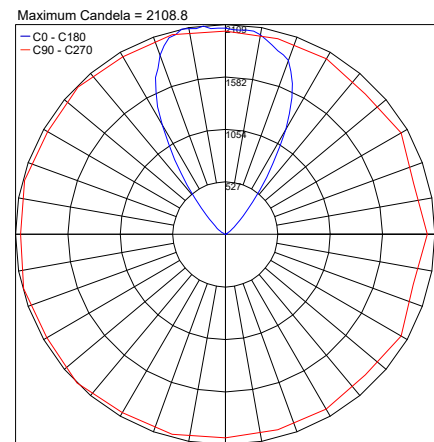

PHOTOMETRIC FILENAME : OLY N240 3000K 65° - PT1014036B.IES

65°

Job Name/Date:

Fixture Type Designation: