



OLY

N

- New 60
- New 80
- 110
- 180
- 240


designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

← OLY 180, INOX BRONZE, 2700K





New

Honeycomb lens filter



New

Asymmetric lens filter





A4 stain-less steel flush screw



Exploded view of body structure




Ring nut in stainless steel AISI 316L Inox Bronze finish

Draining casing for ground recessed




AISI 316L stainless steel ring and lamp body. Optics include 6°, 10°, 21°, 45°, 60°, 65°, 10°x40° and asymmetric wall washer options with color temperatures of 2700K, 3000K, and 4000K, featuring GU10 socket for OLY N110. Stainless steel fixing screws. Snap-in casing installation for versions OLY N-60 and OLY N-80. Installation in the ground and/or on the floor using an embedded counter-casing. Honey-comb and asymmetric anti-glare filters for OLY N-110, OLY N-180, and OLY N-240. 0.31 inches thick extra-clear tempered glass. Casing as accessory for in-ground or concrete installation, accessorized with bottom cap (versions OLY N-60, OLY N-80, and OLY N-110) and plaster guard cap for all versions. Surface finish HCT available in three variants.


N60

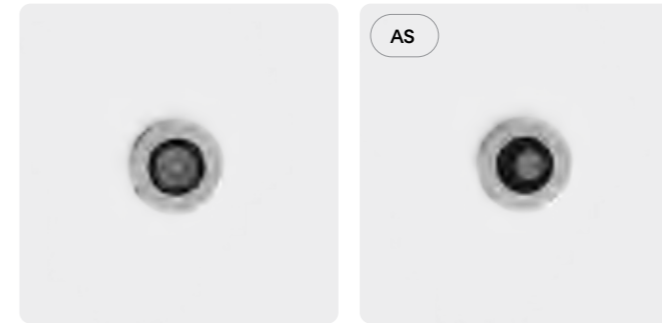

N80

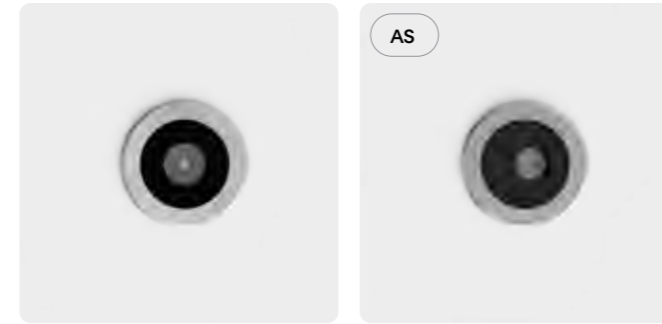

N110

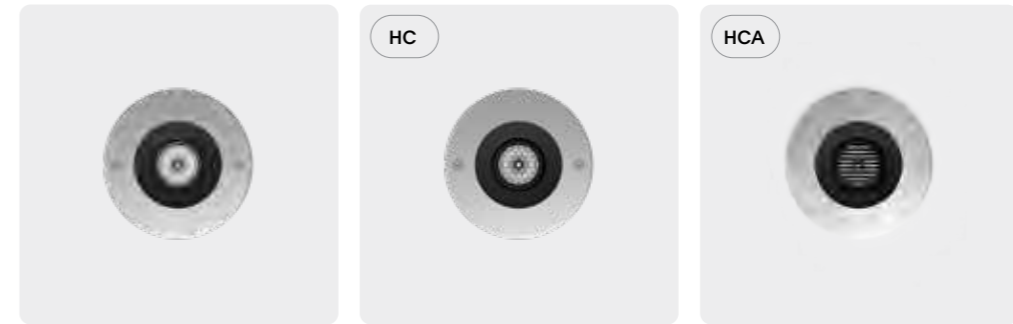


N180



N240




N60




Emission 10°/45°/60°/10°x40° AS Asym. L / Asym. S



Info	Temperature	2700K (463 lm) / 3000K (445 lm) / 4000K (554 lm)
	Power	LED 4W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C1, C2, T1, T2, T3, A1, D1

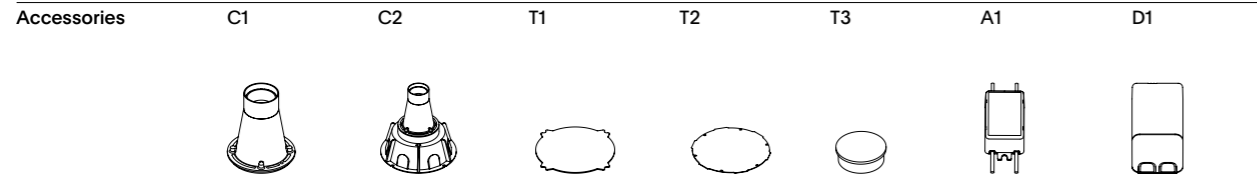


N80




Emission 10°/45°/60°/10°x40° AS Asym. L / Asym. S




Info	Temperature	2700K (631 lm) / 3000K (607 lm) / 4000K (755 lm)
	Power	LED 6W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C3, C4, T1, T2, T4, A2, D1

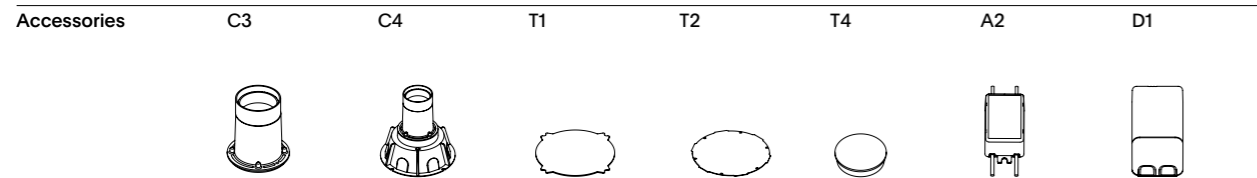

N110




Emission 6° / 21° / 45° / 65° / WW HC 21° / 45° / 65° HCA 21° / 45° / 65°




Info	Temperature	2700K (543 lm) / 3000K (550 lm) / 4000K (613 lm)
	Power	LED 5W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C5, T9, T10

N110 H

Emission 6° / 21° / 45° / 65° / WW HC 21°/45°/65° HCA 21°/45°/65°

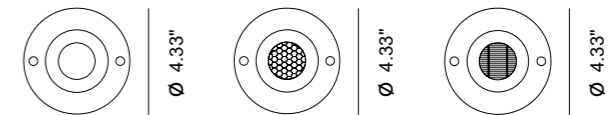

Info	Temperature	2700K (740 lm) / 3000K (750 lm) / 4000K (836 lm)
	Power	LED 7W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C5, T9, T10, A2, D1

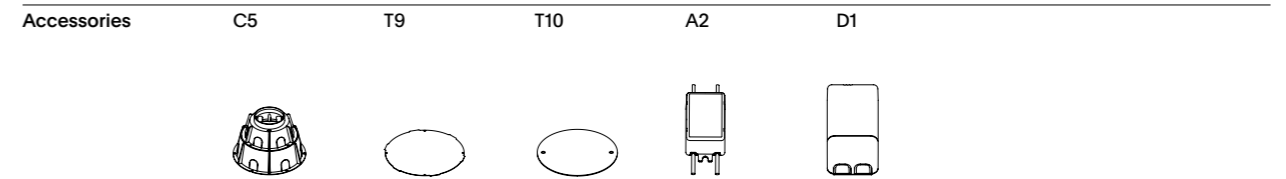


N180


Emission

21°/45°/65°


HC 21°/45°/65°



6.69"



Ø 6.81"



Ø 6.81"

6.81"


Info	Temperature	2700K (1522 lm) / 3000K (1540 lm) / 4000K (1717 lm)
	Power	LED 12W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C6

N180 H


Emission

21°/45°/65°

HC 21°/45°/65°



Ø 6.81"



Ø 6.81"

Info	Temperature	2700K (2174 lm) / 3000K (2200 lm) / 4000K (2453 lm)
	Power	LED 18W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C6

Accessories C6




N240


Emission

21°/45°/65°


HC 21°/45°/65°



7.09"



Ø 9.25"



Ø 9.25"

9.25"

Info	Temperature	2700K (2964 lm) / 3000K (3000 lm) / 4000K (3345 lm)
	Power	LED 24W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK09, IP66/67, DALI, Walkable
	Accessories	C7

Accessories C7





is the USA STRAL's official dealer

79 Trenton Avenue
Frenchtown, NJ

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042