

datasheet





Inox Natural Satin

Head SPT80110 or SPT80120 plus Pole SPT1281 (see page 3)



Inox RAL 9004

Head SPT80110 or SPT80120 plus Pole SPT1281 (see page 3)

Fixture Dimensions - Head For Pole Sizes - See page 2



TECHNICAL DATA

Wattage / Input	24W or 32W	
Power Supply	Integral 120VAC	
Dimming	On / Off	
Construction	Body/Poles: AISI 316L Stainless Steel	
CCT	3000K, 4000K	
CRI	>80	
BUG Rating	B1-U1-G1 (3000K, 24W)	
Delivered Lumens	3450 lm (24W, 3000K) 4600 lm (32W, 3000K) Dark Sky compliant, output below 80°	
Efficacy	143.8 lm	
Optics	Asymmetric or Road	
Hard Coat Finishes	Inox Natural Satin, Matte RAL 9004	
Fixture Dimensions	Head: 26.4" I x 5.9" Pole Dimensions - see page 2	
Lumen Maintenance	L80/B10 @100.000h Ta=25°C	
IP Rating	IP66	
Impact Resistance	IK08	
Warranty	10 Years Against Corrosion 5 Years on Electrical Components	

Shelfie is a integrated pole mounted lighting system classified as street furniture for outdoor installation. Its rectangular pole top is available in 3000K or 4000K with asymmetrical or street optics and poles with heights from 11.5 ft to 19.7 ft, both made of AISI 316L stainless steel. Fixing system through a flange with anchor bolts or in a version with the pole buried. Dark Sky compliant for output below 80°. *Head and pole ordered separately.*

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION for SHELFIE HEAD

Example: SPT8011034.US. Accessories / Poles ordered separately.

				.US
Model No.	ССТ	Optics	Finishes	
SPT80110 - Head Only 24W SPT80120 - Head Only 32W Poles to be ordered separately, see page 3	3 - 3000K 4 - 4000K	5 - Asymmetrical 4 - Road	Inox Natural Satin (standard) . R9004 - Painted Ral 9004 Matte	.US

Fixture Type Designation:

Job Name/Date:


P: 908-996-7710 F: 908-996-7042

1 of 4




datasheet

FIXTURE DIMENSIONS - Pole with Flange (included)

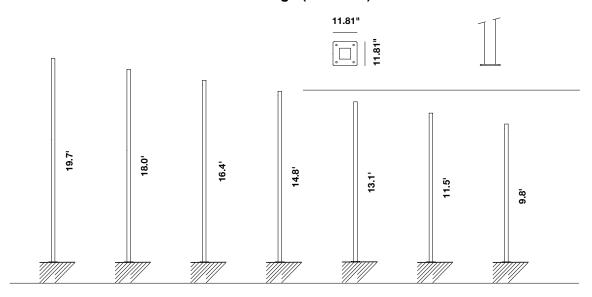

FIXTURE DIMENSIONS - Pole to be Buried

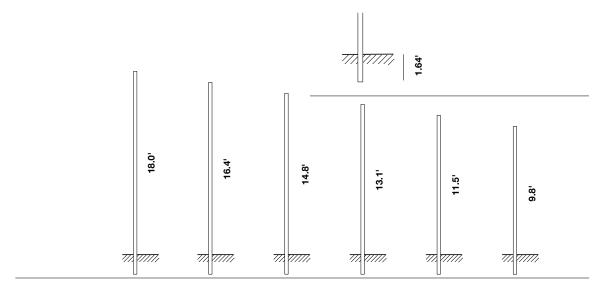

SEE ORDERING MATRIX FOR POLES ON PAGE 3

Job Name/Date:

Fixture Type Designation:

SHELFIE T-700



datasheet

ORDERING INFORMATION for SHELFIE POLES

Example: SPT1281306R9004.US. Head ordered separately.

SPT	1281
-----	------

.US

Model No.

SPT1281

Head to be ordered separately, see page 1



ORDERING EXAMPLE:

SPT8011034.US (head) **+ SPT1281307.US** (pole)

CCT

301 - H3000 (9.8') with flange - Pole Shelfie 1P

201 - H3000 (9.8') buried - Pole Shelfie 1P

302 - H3500 (11.5') with flange - Pole Shelfie 1P

202 - H3500 (11.5') buried - Pole Shelfie 1P

303 - H4000 (13.1') with flange - Pole Shelfie 1P

203 - H4000 (13.1') buried - Pole Shelfie 1P

304 - H4500 (14.8') with flange - Pole Shelfie 1P

204 - H4500 (14.8') buried - Pole Shelfie 1P

305 - H5000 (16.4') with flange - Pole Shelfie 1P

205 - H5000 (16.4') buried - Pole Shelfie 1P

306 - H5500 (18.0') with flange - Pole Shelfie 1P

206 - H5500 (18.0') buried - Pole Shelfie 1P

307 - H6000 (19.7') with flange - Pole Shelfie 1P

501 - H3000 (9.8') with flange - Pole Shelfie 2P

401 - H3000 (9.8') buried - Pole Shelfie 2P

502 - H3500 (11.5') with flange - Pole Shelfie 2P

402 - H3500 (11.5') buried - Pole Shelfie 2P

503 - H4000 (13.1') with flange - Pole Shelfie 2P

403 - H4000 (13.1') buried - Pole Shelfie 2P

504 - H4500 (14.8') with flange - Pole Shelfie 2P

404 - H4500 (14.8') buried - Pole Shelfie 2P

505 - H5000 (16.4') with flange - Pole Shelfie 2P

405 - H5000 (16.4') buried - Pole Shelfie 2P

506 - H5500 (18.0') with flange - Pole Shelfie 2P

406 - H5500 (18.0') buried - Pole Shelfie 2P

507 - H6000 (19.7') with flange - Pole Shelfie 2P

Finishes

Satin (standard)

.US

R9004 - Painted Ral 9004 Matte

Job Name/Date:

Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042

3 of 4




datasheet


FINISHES





PHOTOMETRIC DATA

Note: All photometric data is 3000K









Job Name/Date:

Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042