

SHELFIE T-700

Shelfie is a integrated pole mounted lighting system classified as street furniture for outdoor installation. Its rectangular pole top is available in 3 color temperatures with asymmetrical or street optics and poles with heights from 11.5 ft to 19.7 ft, both made of AISI 316L stainless steel. Fixing system through a flange with anchor bolts or in a version with the pole buried. Dark Sky compliant for output below 80°. *Head and pole ordered separately.*



Inox Natural Satin

Head SPT80110 or SPT80120 plus Pole SPT1281 (see page 3)



Inox RAL 9004


Head SPT80110 or SPT80120 plus Pole SPT1281 (see page 3)

TECHNICAL DATA

Wattage / Input	24W or 32W
Power Supply	Integral 120VAC
Dimming	On / Off
Construction	Body/Poles: AISI 316L Stainless Steel
CCT	2200K, 3000K, 4000K
CRI	>80
BUG Rating	B1-U1-G1 (3000K, 24W)
Delivered Lumens	3450 lm (24W, 3000K) 4600 lm (32W, 3000K) Dark Sky compliant, output below 80°
Efficacy	143.8 lm
Optics	Asymmetric or Road
Hard Coat Finishes	Inox Natural Satin, Matte RAL 9004
Fixture Dimensions	Head: 26.4" l x 5.9" Pole Dimensions - see page 2
Lumen Maintenance	L80/B10 @100.000h Ta=25°C
IP Rating	IP66
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

Fixture Dimensions - Head
For Pole Sizes - See page 2



ORDERING INFORMATION for SHELFIE HEAD


Example: SPT8011034.US. Accessories / Poles ordered separately.

				.US
Model No.	CCT	Optics	Finishes	
SPT80110 - Head Only 24W	1 - 2200K	5 - Asymmetrical	Inox Natural Satin (standard)	.US
SPT80120 - Head Only 32W	3 - 3000K	4 - Road	R9004 - Painted Ral 9004 Matte	
<i>Poles to be ordered separately, see page 3</i>	4 - 4000K			


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS - Pole with Flange (included)

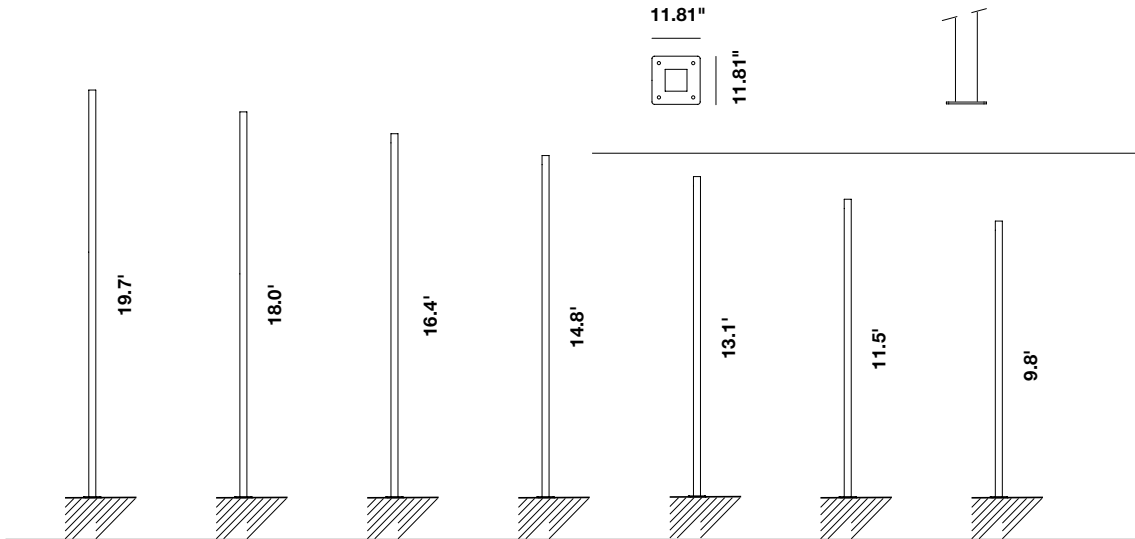

FIXTURE DIMENSIONS - Pole to be Buried

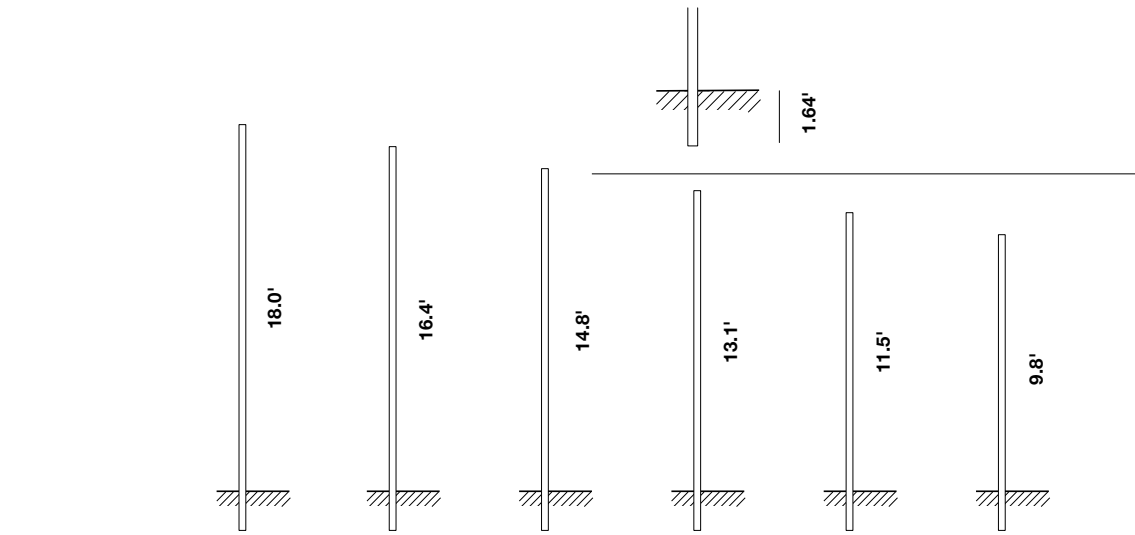


SEE ORDERING MATRIX FOR POLES ON PAGE 3

Job Name/Date:

Fixture Type Designation:

ORDERING INFORMATION for SHELFIE POLES

Example: SPT1281306R9004.US. Head ordered separately.

SPT1281			.US
Model No.	CCT	Finishes	
<p>SPT1281</p> <p><i>Head to be ordered separately, see page 1</i></p>  <p>Inox Satin</p> <p>ORDERING EXAMPLE: SPT8011034.US (head) + SPT1281307.US (pole)</p>	<p>301 - H3000 (9.8') with flange - Pole Shelfie 1P 201 - H3000 (9.8') buried - Pole Shelfie 1P 302 - H3500 (11.5') with flange - Pole Shelfie 1P 202 - H3500 (11.5') buried - Pole Shelfie 1P 303 - H4000 (13.1') with flange - Pole Shelfie 1P 203 - H4000 (13.1') buried - Pole Shelfie 1P 304 - H4500 (14.8') with flange - Pole Shelfie 1P 204 - H4500 (14.8') buried - Pole Shelfie 1P 305 - H5000 (16.4') with flange - Pole Shelfie 1P 205 - H5000 (16.4') buried - Pole Shelfie 1P 306 - H5500 (18.0') with flange - Pole Shelfie 1P 206 - H5500 (18.0') buried - Pole Shelfie 1P 307 - H6000 (19.7') with flange - Pole Shelfie 1P</p> <p>501 - H3000 (9.8') with flange - Pole Shelfie 2P 401 - H3000 (9.8') buried - Pole Shelfie 2P 502 - H3500 (11.5') with flange - Pole Shelfie 2P 402 - H3500 (11.5') buried - Pole Shelfie 2P 503 - H4000 (13.1') with flange - Pole Shelfie 2P 403 - H4000 (13.1') buried - Pole Shelfie 2P 504 - H4500 (14.8') with flange - Pole Shelfie 2P 404 - H4500 (14.8') buried - Pole Shelfie 2P 505 - H5000 (16.4') with flange - Pole Shelfie 2P 405 - H5000 (16.4') buried - Pole Shelfie 2P 506 - H5500 (18.0') with flange - Pole Shelfie 2P 406 - H5500 (18.0') buried - Pole Shelfie 2P 507 - H6000 (19.7') with flange - Pole Shelfie 2P</p>	<p>Satin (standard)</p> <p>R9004 - Painted Ral 9004 Matte</p>	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Satin




Inox RAL 9004


PHOTOMETRIC DATA

Note: All photometric data is 3000K


Maximum Candela = 2504.4

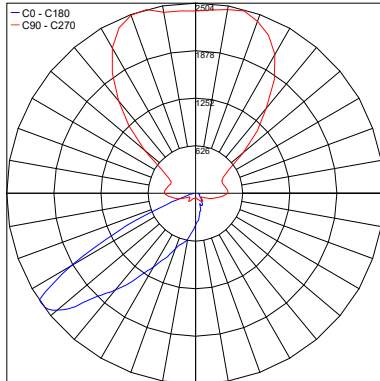


Maximum Candela = 1248.5

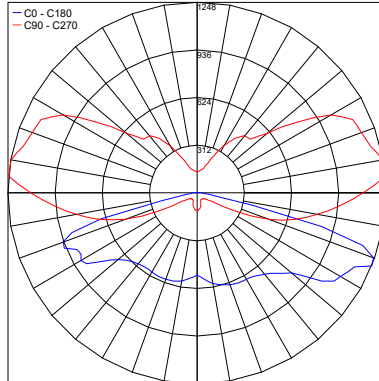

Maximum Candela = 3339.8

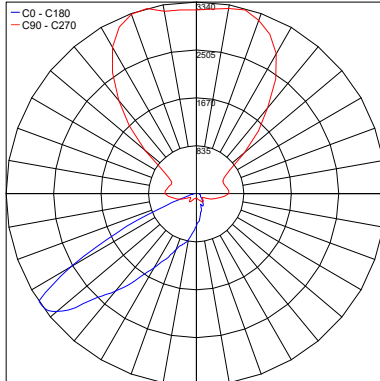

Maximum Candela = 1665

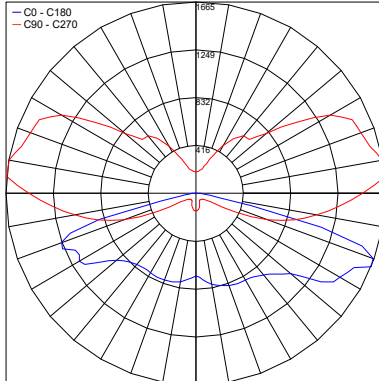

Job Name/Date:

Fixture Type Designation: