

BASE is a rectangular, recessed, in-grade upright made of stainless steel, that is suitable for outdoor installation in the ground and/or on the floor through a polyethylene outer casing. BASE 02 versions have 2 LEDs, horizontal or vertical asymmetrical reflectors, and optics from 21°, 45° and 65°. Available with 3 Hard Coat Treatment finishes.

TECHNICAL DATA

Wattage	10W (BASE V-02, BASE H-02)
Power Supply	Integral 120VAC
Construction	Body/Frame: AISI 316L Stainless Steel Lens: 0.31" (8mm) Extra-clear Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K
BUG Rating	B0-U4-G0 (V-02) B0-U4-G0 (H-02)
CRI	>80
Delivered Lumens	1100 lm (3000K) 1226 lm (4000K)
Efficacy	110 lm/W (3000K) 122.6 lm/W (4000K)
Optics	21°, 45°, 65°
Lumen Maintenance	L80/B10 @100.000h Ta=25°C
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	10.9" l x 5.7" w x 3.6" h
IP Rating	IP66, IP67
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.



BASE V-02



BASE H-02

Fixture Dimensions - See page 2

ORDERING INFORMATION


Example: SPT1022036B.US. Power Supplies / Accessories sold separately.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text" value=".US"/>
Model No.	CCT	Optics	Finishes	<input type="text" value=".US"/>
SPT10220 (V-02)	1 - 2200K	2 - 21°	N - Inox Natural	
SPT10240 (H-02)	2 - 2700K	4 - 45°	G - Inox Graphite	
	3 - 3000K	6 - 65°	B - Inox Bronze	
	4 - 4000K			


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS



V-02



H-02

ACCESSORIES



PT54000
Outer Casing

FINISHES



Inox Natural



Inox Natural



Inox Graphite



Inox Graphite



Inox Bronze



Inox Bronze

V-02

H-02


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

Maximum Candela = 3944.9

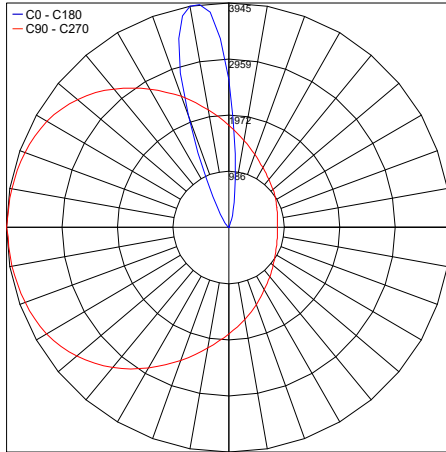


PHOTOMETRIC FILENAME : BASE V02 30K 21° BLACK - PT1022032B.IES

Maximum Candela = 1337.4

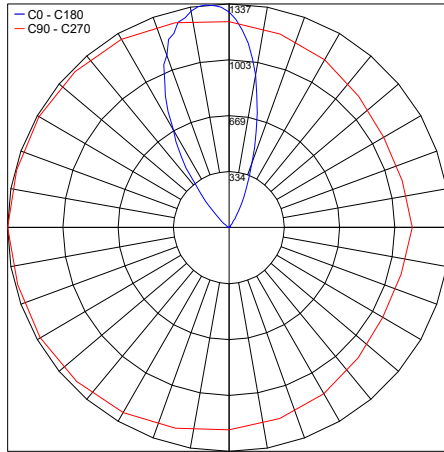


PHOTOMETRIC FILENAME : BASE V02 30K 45° BLACK - PT1022034B.IES

Maximum Candela = 771.5

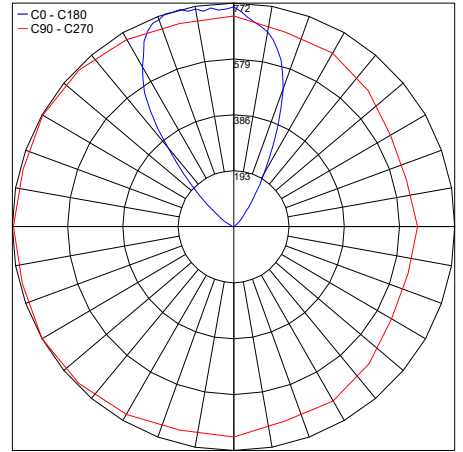


PHOTOMETRIC FILENAME : BASE V02 30K 65° BLACK - PT1022036B.IES

Maximum Candela = 3944.9

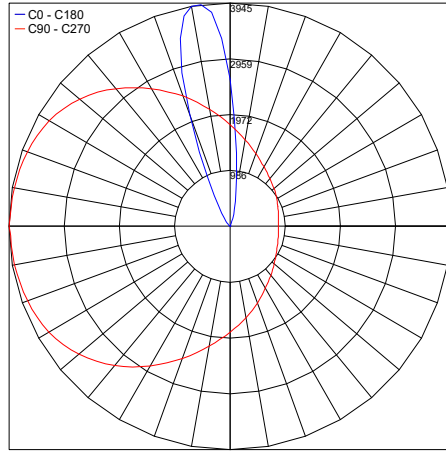


PHOTOMETRIC FILENAME : BASE H02 30K 21° BLACK - PT1024032B.IES

Maximum Candela = 1337.0

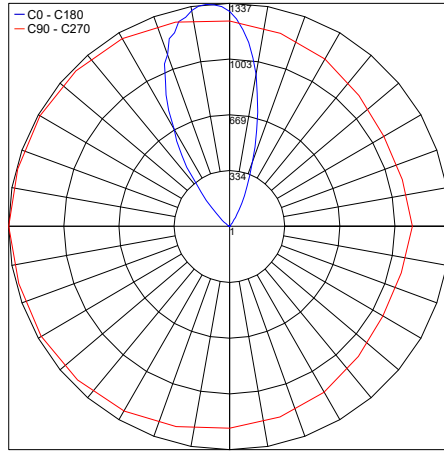

PHOTOMETRIC FILENAME : BASE H02 30K 45° BLACK - PT1024034B.IES

Maximum Candela = 771.5

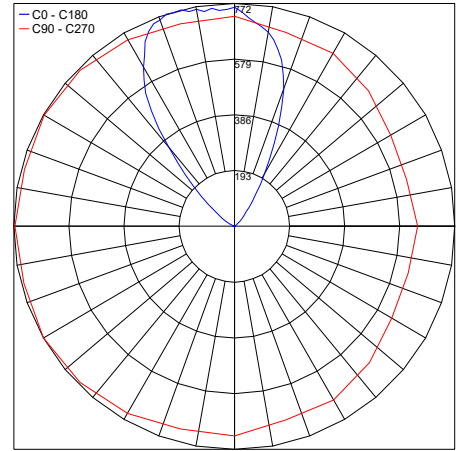

PHOTOMETRIC FILENAME : BASE H02 30K 65° BLACK - PT1024036B.IES

Job Name/Date:

Fixture Type Designation: