


datasheet

BASE is a rectangular, recessed, in-grade uplight made of stainless steel, that is suitable for outdoor installation in the ground and/or on the floor through a polyethylene outer casing. BASE 02 versions have 2 LEDs, horizontal or vertical asymmetrical reflectors, and optics from 21°, 45° and 65°. Available with 3 Hard Coat Treatment finishes.

## **TECHNICAL DATA**

Wattage	10W (BASE V-02, BASE H-02)		
Power Supply	Integral 120VAC		
Construction	Body/Frame: AISI 316L Stainless Steel Lens: 0.31" (8mm) Extra-clear Tempered Glass		
CCT	2700K, 3000K, 4000K		
BUG Rating	B0-U4-G0 (V-02) B0-U4-G0 (H-02)		
CRI	>80		
Delivered Lumens	1100 lm (3000K) 1226 lm (4000K)		
Efficacy	110 lm/W (3000K) 122.6 lm/W (4000K)		
Optics	21°, 45°, 65°		
Lumen Maintenance	L80/B10 @100.000h Ta=25°C		
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze		
Fixture Dimensions	10.9" l x 5.7" w x 3.6" h		
IP Rating	IP66, IP67		
Impact Resistance	IK08		
Warranty	10 Years Against Corrosion 5 Years on Electrical Components		

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.



BASE V-02





BASE H-02

Fixture Dimensions - See page 2

#### ORDERING INFORMATION

Example: SPT1022036B.US. Power Supplies / Accessories sold separately.

				.US
Model No.	ССТ	Optics	Finishes	
SPT10220 (V-02)	<b>2</b> - 2700K	<b>2</b> - 21°	N - Inox Natural	.US
SPT10240 (H-02)	<b>3</b> - 3000K	<b>4</b> - 45°	G - Inox Graphite	
	<b>4</b> - 4000K	<b>6</b> - 65°	<b>B</b> - Inox Bronze	


Job Name/Date: Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042



datasheet


# **FIXTURE DIMENSIONS**



# **ACCESSORIES**



## **FINISHES**

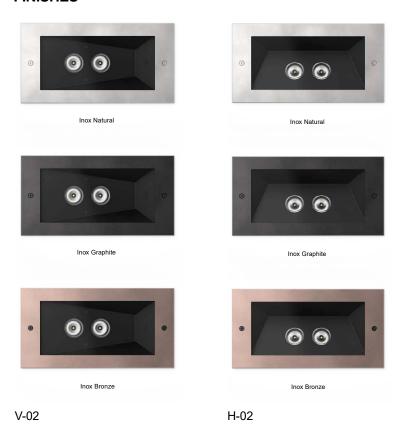

Job Name/Date: Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042


# **BASE 02**





datasheet


## PHOTOMETRIC DATA


NOTE: All photometry is 3000K














Job Name/Date:

Fixture Type Designation: