


# GINKO 3.5

The Ginko series IP66 / IP69 projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI. Ginko 3.5 is a framing projector that is Ø3.3", IP66, and static white with light shaper optics. Customized Gobo to project logos / words on request.



Fixture Dimensions

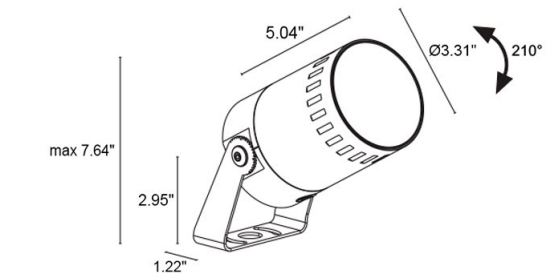

3mm Gobos on request

## TECHNICAL DATA

<b>Wattage / Input</b>	15W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anti-corrosive Aluminum Alloy Bracket: 316L Stainless Steel Lens: Serigraphed-gray & Tempered Extra-clear Glass Neoprene Cable: 4.9' standard
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>BUG Rating</b>	B1-U0-G0
<b>Delivered Lumens</b>	585 lm (3000K, CRI>90)
<b>Efficacy</b>	39 lm/W (3000K, CRI>90)
<b>Optics</b>	Light Shaper
<b>Finishes</b>	4 Standard, Custom RAL (see below) <i>(4 Stage Marine Grade Finish)</i>
<b>Fixture Dimensions</b>	Ø3.31" x 5.04" x 2.95" h (max 7.64" h fully extended), 1.22" wide bracket
<b>Fixture Weight</b>	2.87 lbs
<b>LED Source</b>	1 High Density COB LED
<b>Lumen Maintenance</b>	L95, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	2-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK09

## ORDERING INFORMATION

Example: GN35001000FR9T. Accessories / Power Supplies ordered separately.

GN3500	1000		R9		-	
Model No.	CRI	CCT	Optics	Finish		Cable Length
GN3500	1000 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	R9 - Light Shaper	E - White H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL <i>(consult factory for "C")</i>		4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

15W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-5
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-5

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES Installation



**WP0100**  
Ground Spike  
(Length 10.12")



**WP1006\_\_** (Length 19.69")  
**WP1007\_\_** (Length 31.50")  
Ground Spike with Bracket  
Include one of the below finishes:  
**E** - White  
**H** - Anthracite  
**T** - Cor-ten  
**5** - Jasper Green  
**C** - Custom RAL

## Snoots



**WB8010\_**  
Standard Snoot  
Include one of the below finishes:  
**E** - White  
**H** - Anthracite  
**T** - Cor-ten  
**5** - Jasper Green  
**C** - Custom RAL



**WB8020\_**  
Asymmetrical Snoot  
Include one of the below finishes:  
**E** - White  
**H** - Anthracite  
**T** - Cor-ten  
**5** - Jasper Green  
**C** - Custom RAL


## Various Accessories




**WP1004**  
Fastener Strap  
(Length 16.4')

## PHOTOMETRIC DATA


Note all Photometry is CRI 90

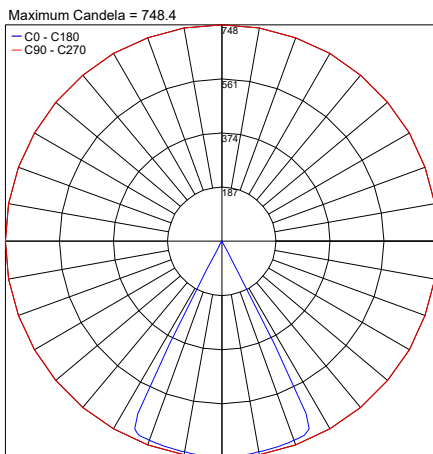

PHOTOMETRIC FILENAME : GINKO\_3.5\_SHAPER\_CIRCLE\_2700K\_CR190\_15W\_24VDC.IES

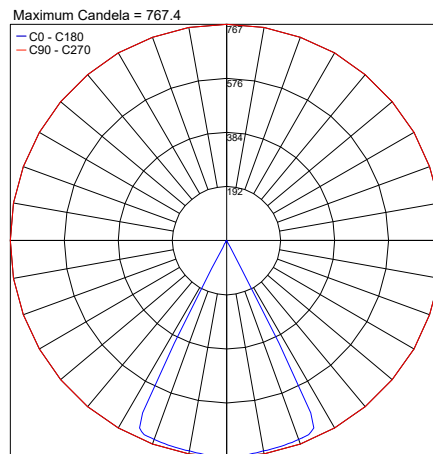

PHOTOMETRIC FILENAME : GINKO\_3.5\_SHAPER\_CIRCLE\_3000K\_CR190\_15W\_24VDC.IES

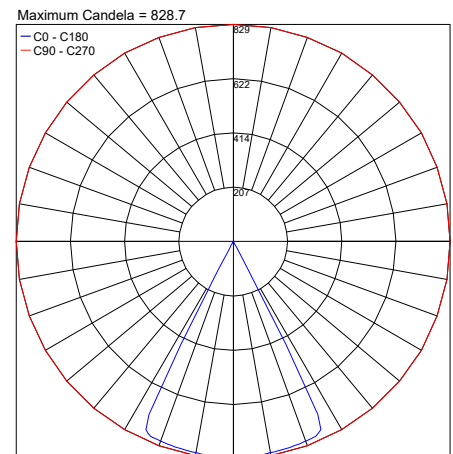

PHOTOMETRIC FILENAME : GINKO\_3.5\_SHAPER\_CIRCLE\_4000K\_CR190\_15W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: