

GINKO

PROJECTORS FOR OUTDOOR APPLICATIONS



Ginko can be used for both landscape lighting and architectural lighting of details and facades, thanks to its range of different light outputs (including very narrow 2°, 5° and 8° optics) and the availability of versions with a zoom lens, to regulate the light output based on the object to be lit. A shadow-effect filter can be built in to recreate the dappled effect of daylight shining through foliage, while the Light Shaper optics (Ginko 3.5) enable the projection of different light shapes with pin-sharp contours, as well as the use of customized gobos. The jasper green finish has been specially developed for use in landscape lighting of trees and plants.

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

GINKO

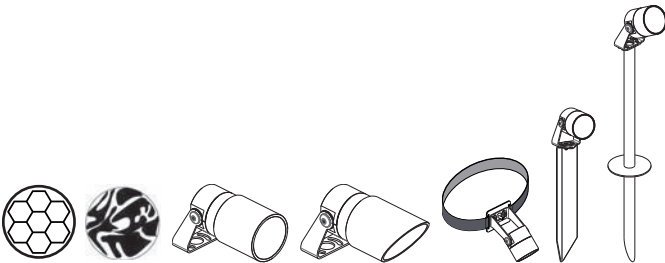
2200K 2700K 3000K 4000K RGB RGBW

max 500mA; 24VDC
2.5W up to 25W
CRI 80 - 90
up to 1724 lm (3000K, 12°, CRI >90), 2133 lm (3000K, 12°, CRI 80)
Optics Fixed: 2°, 5°, 8°, 11°, 12°, 13°, 17°, 19°, 20°, 26°, 30°, 33°, 34°, 36°, 42°, 45°, 47°, 55°, 56°, 58°, 61°, 68° Sharp: 21°, 38°, 48°, 61° Elliptical: 13°x65°, 16°x36°, 24°x69°, 36°x16°, 13°x52°, 54°x15°, 21°x42°, 42°x21° Adjustable: 12°x64°, 13°x65°, 24°x69°, 32°x73°,28°x72°, 32°x73° Optical range: 8°—28°, 8°—38°, 9°—36° Adjustable optical range: 8°x66°, 36°—70° Light Shaper
IP66 IP69 IK07 IK08 IK09



Ginko 2.0. 3000K, 3.5W, 5°, brass.

Ø1.34"	Ø2.13"	Ø3.31"	Ø4.29"
			
GINKO 1.0	GINKO 2.0 GINKO 2.2 (RGB)	GINKO 3.0 GINKO 3.3 (RGBW)	GINKO 4.0 GINKO 4.3 (RGBW)
			
		GINKO 3.5 Light shaper	
			
	GINKO1.4	GINKO 2.4	GINKO 3.4

	Accessories: Shadow-filter effect Honeycomb louvre Standard snoot Asymmetrical snoot Spike Fastener strap
---	---

Create infinite light geometries



Ginko 3.5, 3000K, 15W, light shaper, cor-ten.





Ginko 3.0, 3000K, 3.5W, 2°, anthracite.

Ginko 3.5, 3000K, 15W, light shaper, anthracite.
 Ginko 3.5, 3000K, 15W, light shaper + gobo, anthracite.
 Ginko 3.0, 3000K, 3.5W, 2°, anthracite.

