

OGI is a family of luminaires based on the shape of the traditional Japanese folding fan of the same name and comes in a suspended, wall or table version. The bold, geometric shape in solid colors and surprisingly thin profile create an iconic, graphic signature - a calligraphic brush stroke in the air. The OGI Wall comes in 2 sizes, with touchless control, direct / indirect light, and basic, standard and premium finishes.



Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	7W (200mA), 12W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Powder Coated Steel Lens: Satin
CCT	3000K, 4000K
CRI	>90
Delivered Lumens	20 Wall: 630 lm (direct) / 63 lm (indirect) 40 Wall: 1260 lm (direct) / 126 lm (indirect)
Efficacy	20 Wall: 90 lm/W (direct) 40 Wall: 93.3 lm/W (direct)
Optics	Diffuse
Lumen Maintenance	50,000 hrs L80, B10 (Ta 25°C)
Color Consistency	3-Step MacAdam
Finishes	4 Basic, 4 Standard, 8 Premium - see page 2
Fixture Dimensions	7.09" x 2.76" x 4.96" (20 Wall) 14.57" x 2.76" x 8.94" (40 Wall)
IP Rating	IP20

ORDERING INFORMATION


Example: 7.2411.01M1.1761.50.US. Power Supplies / Accessories sold separately.

						.US
Model No.	CCT	Finishes				
7.2411.01M1 (20 Wall)	1661 - 3000K ON/OFF	40 - White (Basic)	G0 - Fog (Basic)			.US
7.2412.02M1 (40 Wall)	1761 - 4000K ON/OFF	50 - Black (Basic)	H0 - Graphite (Basic)			
	2661 - 3000K DALI (only on 40 Wall)	A0 - Sage (Premium)	M0 - Marrone (Premium)			
	2761 - 3000K DALI (only on 40 Wall)	B0 - Black Dust (Premium)	N0 - Night (Premium)			
		C0 - Cloudy (Premium)	O0 - Ochra (Standard)			
		D0 - Sandy (Premium)	S0 - Sapphire (Standard)			
		E0 - Earth (Premium)	V0 - Volcano (Premium)			
		F0 - Forrest (Standard)	W0 - Wine (Standard)			

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

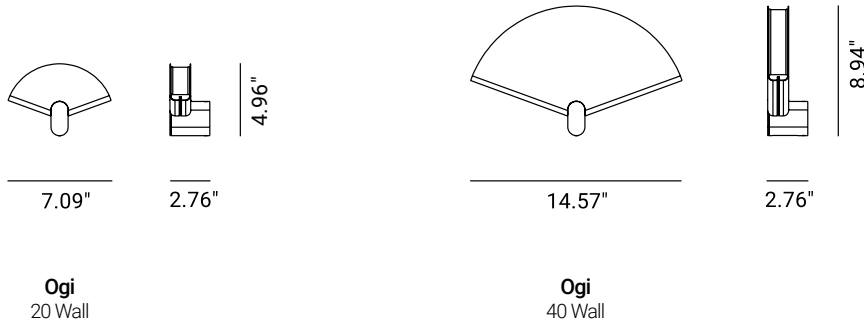

SUGGESTED POWER SUPPLIES

500mA (OGI 40) - 200mA (OGI 20)

Part Number	Description	Input/Output	# of Fixtures	
			7W	12W
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-2	1-1
PPLT00527	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	—	1-1
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	—	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-2	1-2
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-8	1-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						7W	12W
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	—	1-1
PPLT00676	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ (0.1% DIM) F2B	120-277VAC to 500mA, 20W, Class 2	—	1-1
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	—	2-2





For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

HOUSING COLORS









Basic

-  white (RAL9016)
-  fog (RAL7038)
-  graphite (RAL7024)
-  black (RAL9005)

Standard

-  sapphire (RAL 5003)
-  forrest (RAL 6005)
-  wine (RAL 3005)
-  ochra (RAL 8001)

Premium


-  sandy
-  sage
-  earth
-  cloudy
-  marrone
-  volcano
-  night
-  black dust

PHOTOMETRIC DATA

Note: All photometric data is 3000K

20 Wall


Maximum Candela = 192.4

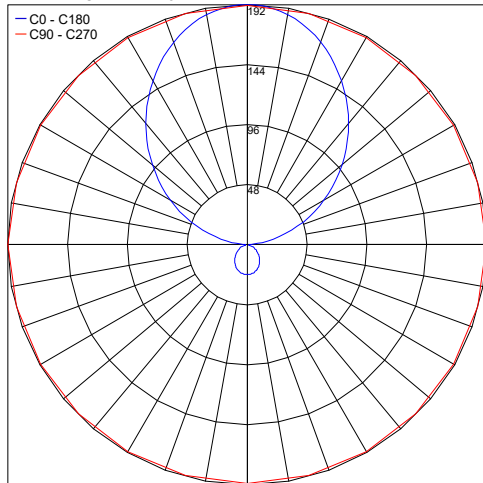

PHOTOMETRIC FILENAME : OGI_20_W_3000K_SATINE_CC_HE_180X70MM.IES

40 Wall

Maximum Candela = 384.8

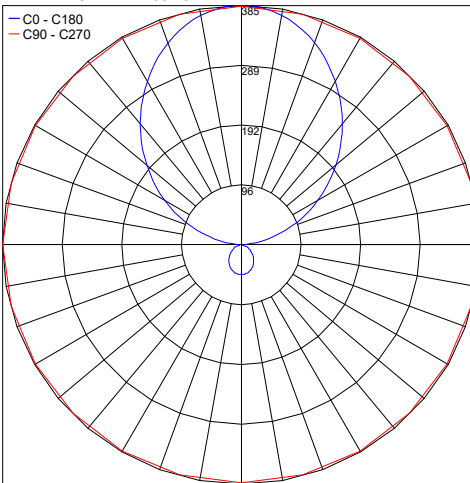

PHOTOMETRIC FILENAME : OGI_40_W_3000K_SATINE_CC_HE_370X70MM.IES

Job Name/Date:

Fixture Type Designation: