

OGI is a family of luminaires based on the shape of the traditional Japanese folding fan of the same name and comes in a suspended, wall or table version. The bold, geometric shape in solid colors and surprisingly thin profile create an iconic, graphic signature - a calligraphic brush stroke in the air. The OGI Wall comes in 2 sizes, with touchless control, direct / indirect light, and basic, standard and premium finishes.



Fixture Dimensions - See page 2

## TECHNICAL DATA

<b>Wattage / Input</b>	7W (200mA), 12W (500mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Powder Coated Steel Lens: Satin
<b>CCT</b>	3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	20 Wall: 630 lm (direct) / 63 lm (indirect) 40 Wall: 1260 lm (direct) / 126 lm (indirect)
<b>Efficacy</b>	20 Wall: 90 lm/W (direct) 40 Wall: 93.3 lm/W (direct)
<b>Optics</b>	Diffuse
<b>Lumen Maintenance</b>	50,000 hrs L80, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Finishes</b>	4 Basic, 4 Standard, 8 Premium - see page 2
<b>Fixture Dimensions</b>	7.09" x 2.76" x 4.96" (20 Wall) 14.57" x 2.76" x 8.94" (40 Wall)
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

Example: IO7.2411.01M1.1761.50.US. Power Supplies / Accessories sold separately.


				<b>.US</b>
--	--	--	--	------------

Model No.	CCT	Finishes		
IO7.2411.01M1 (20 Wall)	1661 - 3000K ON/OFF	40 - White (Basic)	G0 - Fog (Basic)	<b>.US</b>
IO7.2412.02M1 (40 Wall)	1761 - 4000K ON/OFF	50 - Black (Basic)	H0 - Graphite (Basic)	
	2661 - 3000K DALI (only on 40 Wall)	A0 - Sage (Premium)	M0 - Marrone (Premium)	
	2761 - 3000K DALI (only on 40 Wall)	B0 - Black Dust (Premium)	N0 - Night (Premium)	
		C0 - Cloudy (Premium)	O0 - Ochra (Standard)	
		D0 - Sandy (Premium)	S0 - Sapphire (Standard)	
		E0 - Earth (Premium)	V0 - Volcano (Premium)	
		F0 - Forrest (Standard)	W0 - Wine (Standard)	

Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS

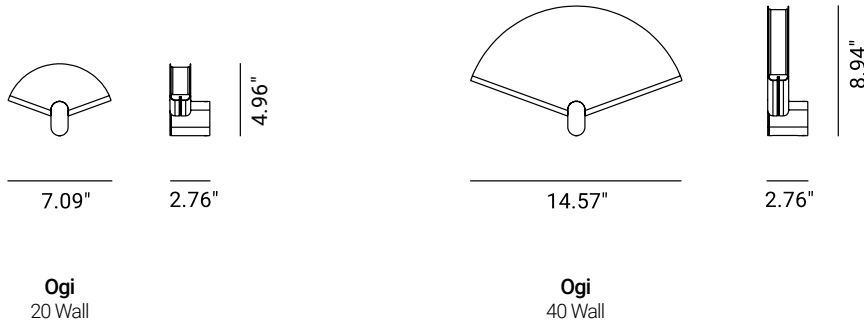

## SUGGESTED POWER SUPPLIES

500mA (OGI 40) - 200mA (OGI 20)

Part Number	Description	Input/Output	# of Fixtures	
			7W	12W
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-2	1-1
<a href="#">PPLT00527</a>	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	—	1-1
<a href="#">PPLT00262</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	—	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 500mA, 100W, Class 2	1-8	1-8

### Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						7W	12W
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	—	1-1
<a href="#">PPLT00676</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ (0.1% DIM) F2B	120-277VAC to 500mA, 20W, Class 2	—	1-1
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	—	2-2

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## HOUSING COLORS


Basic	Standard	Premium	
white (RAL9016)	sapphire (RAL 5003)	sandy	marrone
fog (RAL7038)	forrest (RAL 6005)	sage	volcano
graphite (RAL7024)	wine (RAL 3005)	earth	night
black (RAL9005)	ochra (RAL 8001)	cloudy	black dust

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

### 20 Wall


Maximum Candela = 192.4

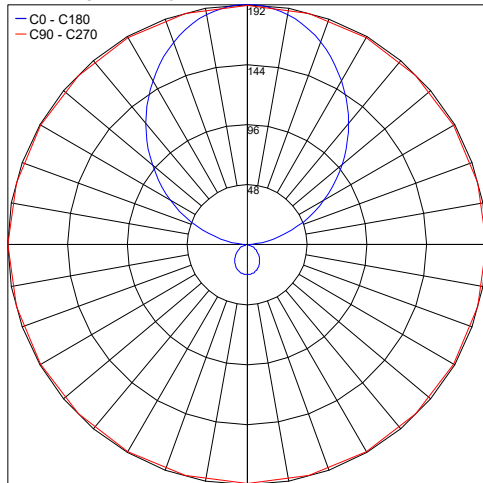

PHOTOMETRIC FILENAME : OGI\_20\_W\_3000K\_SATINE\_CC\_HE\_180X70MM.IES

### 40 Wall

Maximum Candela = 384.8

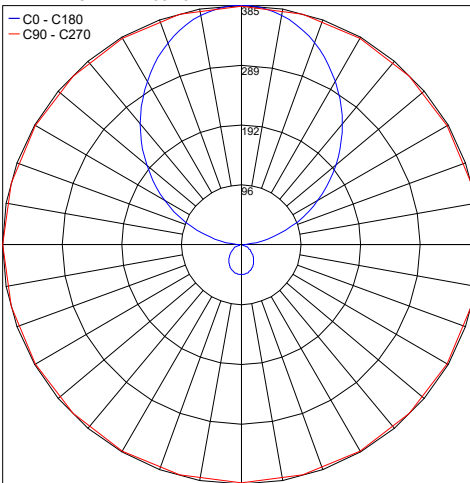

PHOTOMETRIC FILENAME : OGI\_40\_W\_3000K\_SATINE\_CC\_HE\_370X70MM.IES

Job Name/Date:

Fixture Type Designation: