

REIKO

PROJECTORS FOR OUTDOOR APPLICATIONS



A square design is the signature feature of Reiko projectors, developed for architectural and landscape lighting. The wide variety of light outputs, including very narrow 5° and 7°, the ability to adjust the elliptical optics with a magnet and the shadow-effect filter enable myriad uses and creative solutions, both in designing detail and facade lighting, and in illuminating plants and trees. For landscape design applications, Reiko is available in a jasper green finish with appropriate installation accessories and anti-glare solutions.

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

REIKO

2200K 2700K 3000K 4000K



Reiko 2.0, 3000K, 7W, 44°, cor-ten.
Reiko 1.0, 3000K, 3,5W, 38°, cor-ten.

| |
|---|
| 24VDC |
| 2.5W up to 25W |
| CRI 80 - 90 |
| up to 1809 lm (3000K, 13°, 25W, CRI >90), 2128 lm (3000K, 13°, 25W, CRI 80) |
| Optics |
| Fixed: 5°, 7°, 8°, 10°, 15°, 17°, 18°, 21°, 30°, 34°, 37°, 38°, 44°, 49°, 54°, 59°, 73° |
| Sharp: 22°, 32°, 38°, 56° |
| Elliptical: 16°x50°, 18°x34°, 34°x18°, 50°x16° |
| Adjustable: 11°x60°, 13°x66°, 25°x66°, 27°x64° |
| IP65 IP66 IK06 |

1.38"x1.38"x1.97"

2.17"x2.17"x2.36"

3.35"x3.35"x3.54"

4.33"x4.33"x4.33"



REIKO 1.0




REIKO 2.0




REIKO 3.0



REIKO 4.0

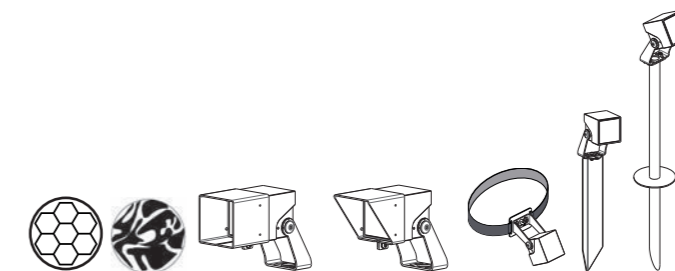

- Accessories:
- Shadow-effect filter
- Honeycomb louvre
- Standard square snoot
- Asymmetrical square snoot
- Spike
- Fastener strap

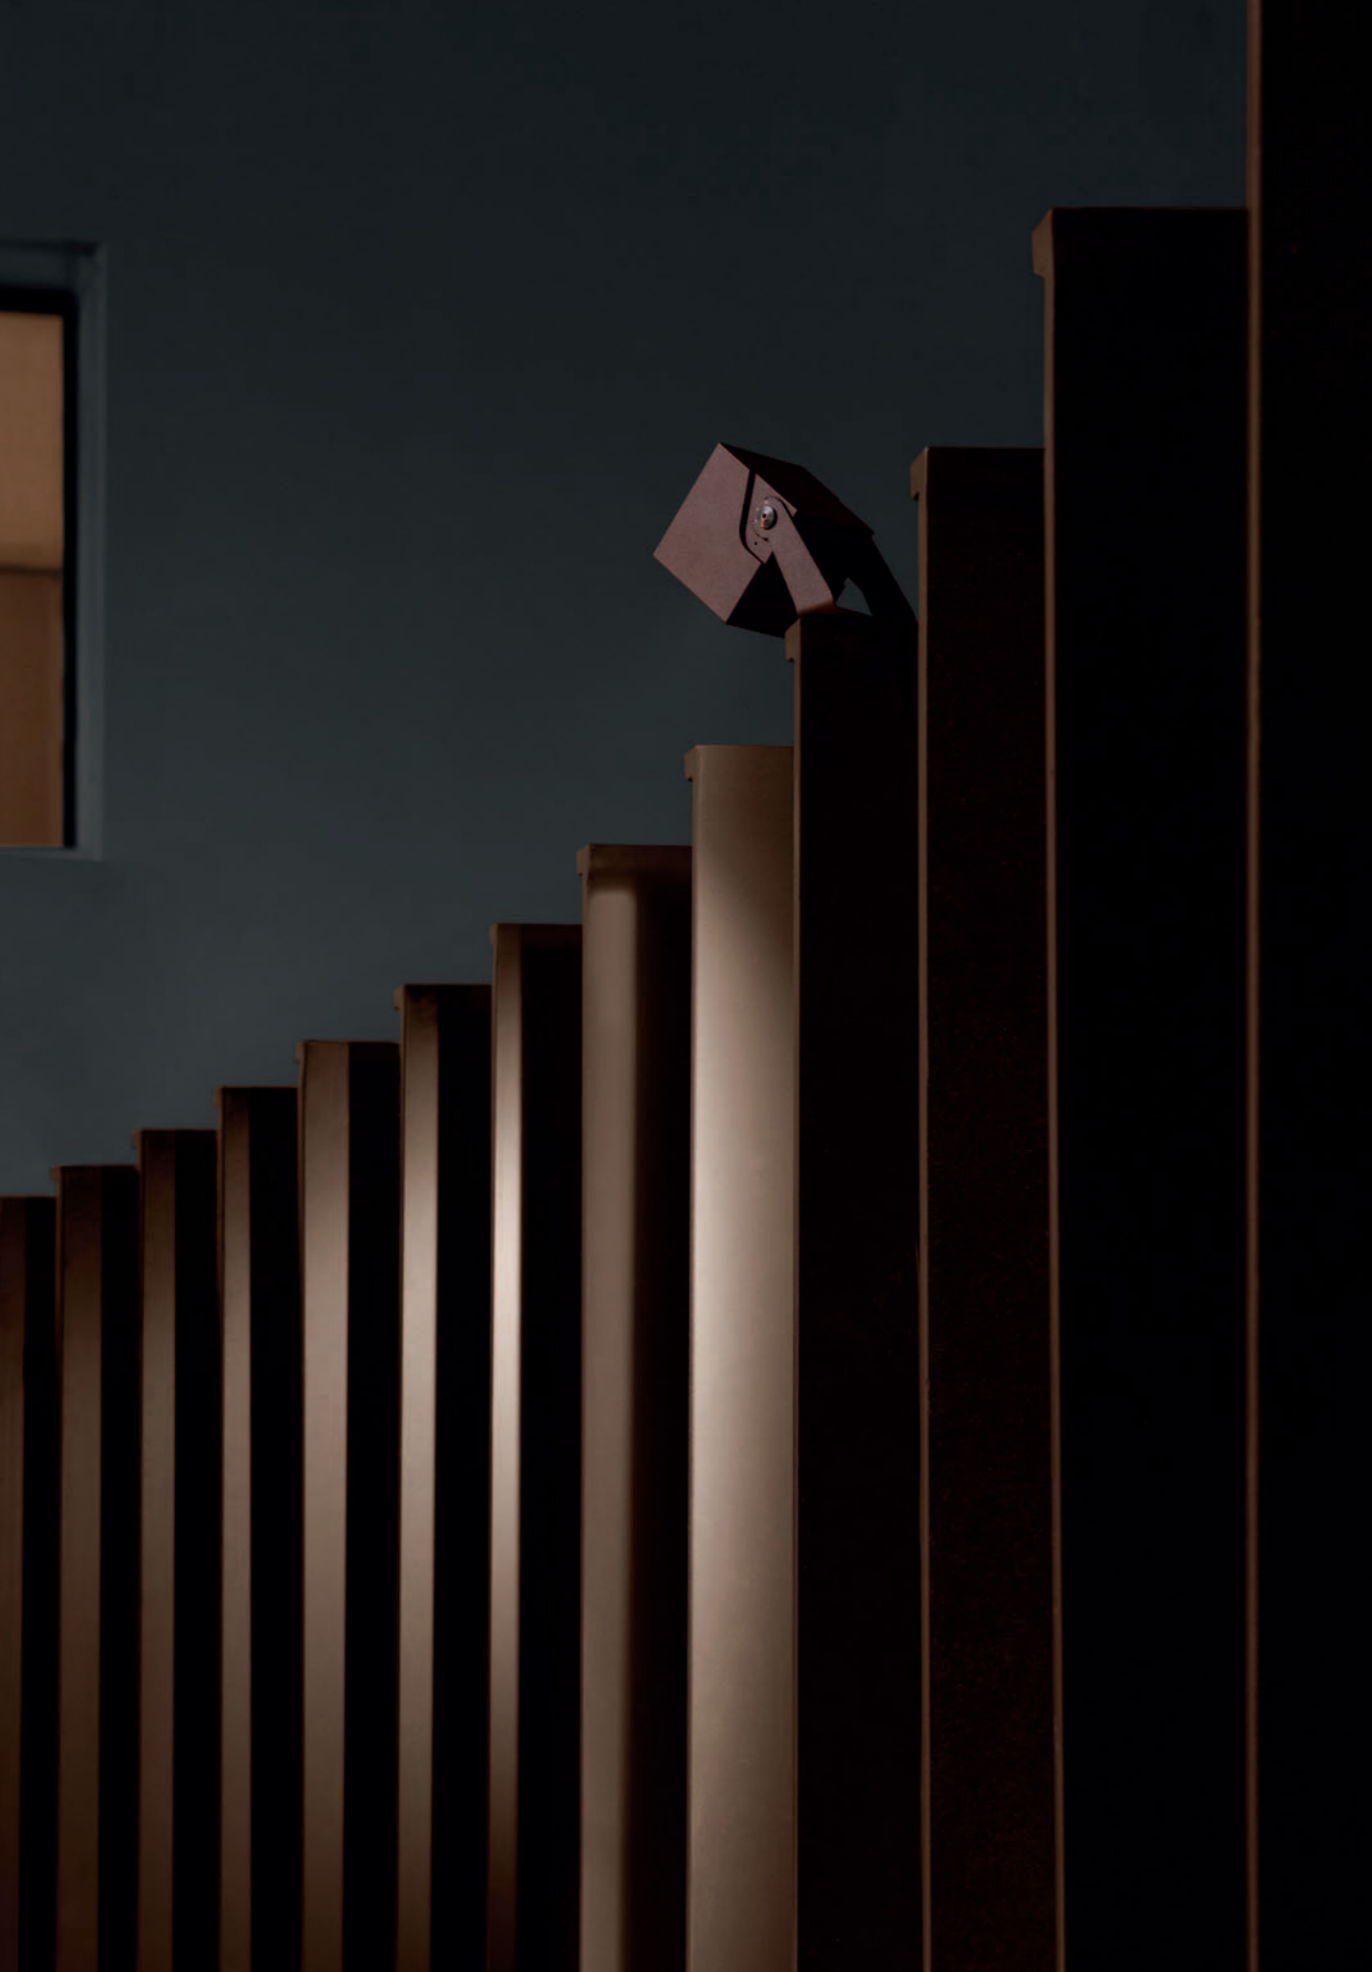

Reiko 3.0, 3000K, 10W, 42°, cor-ten

Wide choice of optics for different lighting concepts

Reiko 4.0, 3000K, 25W, sharp 33°, grey.

