


# BASE 03

BASE is a rectangular, recessed, in-grade upright made of stainless steel, that is suitable for outdoor installation in the ground and/or on the floor through a polyethylene outer casing. BASE 03 versions have 3 LEDs, horizontal or vertical asymmetrical reflectors, and optics from 21°, 45° and 65°. Available with 3 Hard Coat Treatment finishes.

## TECHNICAL DATA

<b>Wattage</b>	18W (BASE V-03, BASE H-03)
<b>Power Supply</b>	Remote 350mA, not included. See page 2.
<b>Dimming</b>	See Power Supplies
<b>Construction</b>	Body/Frame: AISI 316L Stainless Steel Lens: 0.31" (8mm) Extra-clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U5-G0 (V-03) B0-U5-G0 (H-03)
<b>CRI</b>	>85
<b>Delivered Lumens</b>	1500 lm (3000K) 2250 lm (4000K)
<b>Efficacy</b>	125 lm/W
<b>Optics</b>	21°, 45°, 65°
<b>Lumen Maintenance</b>	L80/B10 @100.000h Ta=25°C
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	10.91" l x 5.71" w x 3.6" h
<b>IP Rating</b>	IP66, IP67
<b>Impact Resistance</b>	IK08
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components



BASE V-03



BASE H-03

Fixture Dimensions - See page 2

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION


Example: SPT1023036B.US. Power Supplies / Accessories sold separately.

				.US
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finishes</b>	
SPT10230 (V-03)	2 - 2700K	2 - 21°	N - Inox Natural	.US
SPT10250 (H-03)	3 - 3000K	4 - 45°	G - Inox Graphite	
	4 - 4000K	6 - 65°	B - Inox Bronze	


Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS



V-03



H-03

## FINISHES



Inox Natural



Inox Natural



Inox Graphite



Inox Graphite



Inox Bronze



Inox Bronze

V-03

H-03

## ACCESSORIES



**PT54000**  
Outer Casing

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-4


For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA


NOTE: All photometry is 3000K

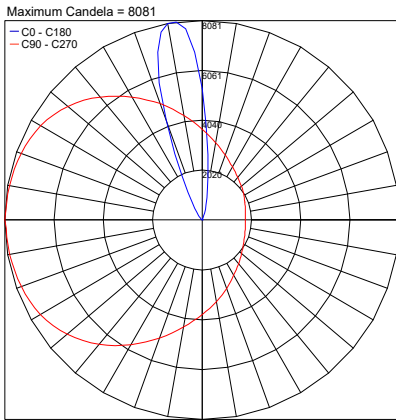


PHOTOMETRIC FILENAME : BASE V03 30K 21° BLACK - PT1023032B.IES

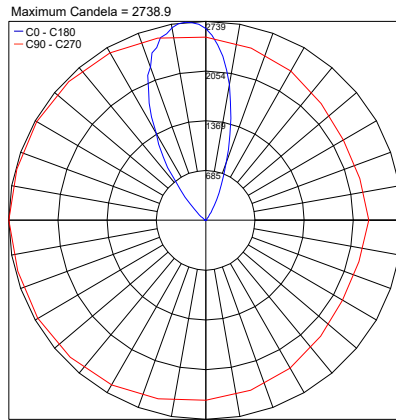


PHOTOMETRIC FILENAME : BASE V03 30K 45° BLACK - PT1023034B.IES

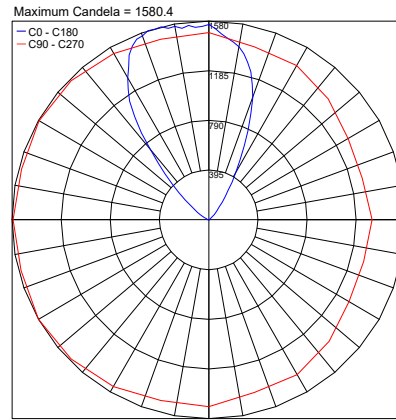


PHOTOMETRIC FILENAME : BASE V03 30K 65° BLACK - PT1023036B.IES

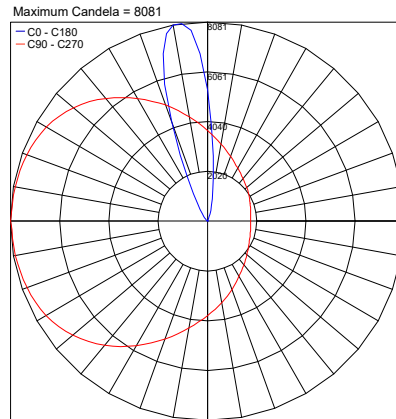

PHOTOMETRIC FILENAME : BASE H03 30K 21° BLACK - PT1025032B.IES

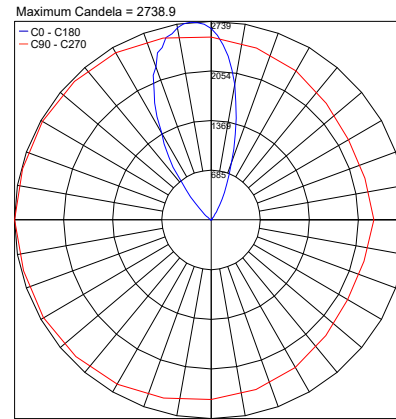

PHOTOMETRIC FILENAME : BASE H03 30K 45° BLACK - PT1025034B.IES

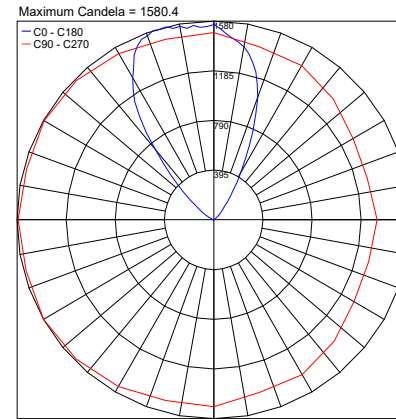

PHOTOMETRIC FILENAME : BASE H03 30K 65° BLACK - PT1025036B.IES

Job Name/Date:

Fixture Type Designation: